


CENTER TREE IN PIT AND SET TOP OF ROOT BALL 2" ABOVE ADJACENT SOIL. THE TRUNK FLARE SHALL BE VISIBLE AT THE TOP OF THE ROOT BALL. DO NOT COVER THE TOP OF THE ROOT BALL WITH SOIL

REMOVE ALL TWINE, ROPE, WIRE, AND BURLAP FROM TOP 2/3 OF ROOT BALL

SHREDDED HARDWOOD MULCH; MULCH MUST BE 6" AWAY FROM TREE TRUNK

DEPTH OF ROOTBALL VARIES

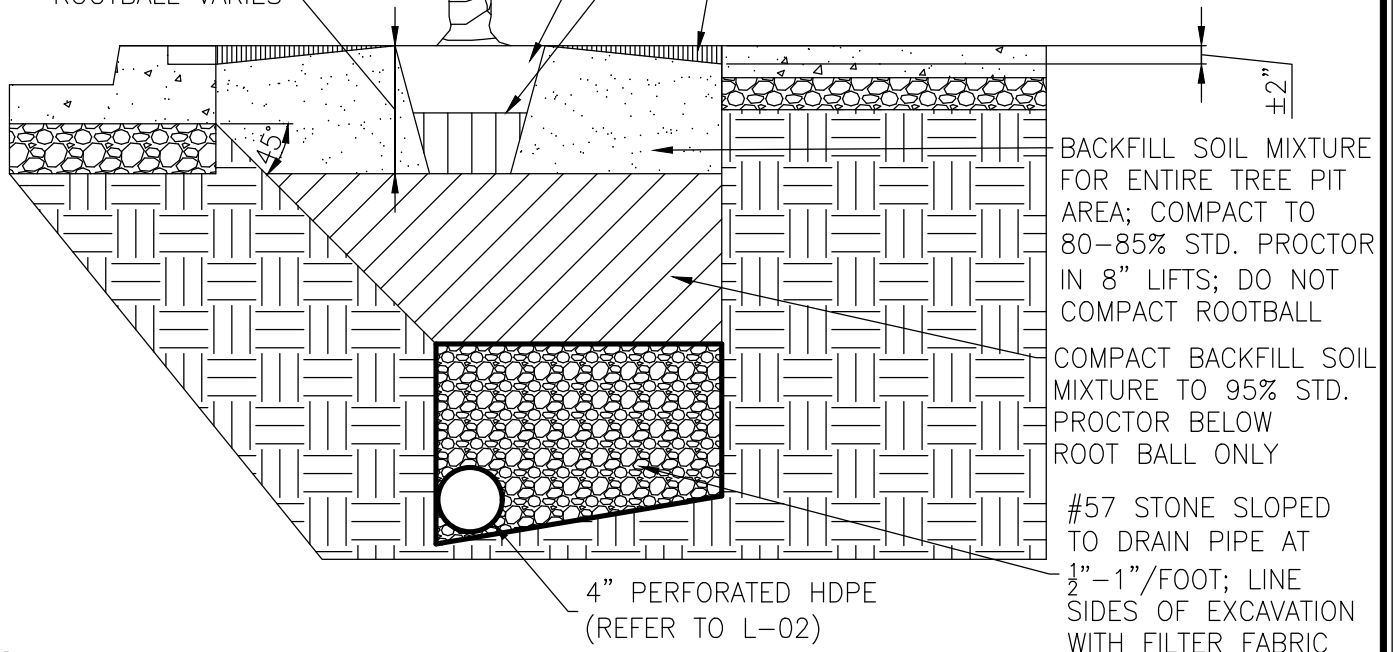

BACKFILL SOIL MIXTURE FOR ENTIRE TREE PIT AREA; COMPACT TO 80-85% STD. PROCTOR IN 8" LIFTS; DO NOT COMPACT ROOTBALL

COMPACT BACKFILL SOIL MIXTURE TO 95% STD. PROCTOR BELOW ROOT BALL ONLY

#57 STONE SLOPED TO DRAIN PIPE AT 1/2"-1"/FOOT; LINE SIDES OF EXCAVATION WITH FILTER FABRIC

4" PERFORATED HDPE (REFER TO L-02)

NOTES:

1. REFER TO STREET TREE PIT DETAIL (L-02) FOR PIT CONSTRUCTION AND INFORMATION ON ADJACENT PAVEMENTS, CURBS, AND DRAINAGE.
2. MOUND SOIL ABOVE SIDEWALK GRADE TO ALLOW FOR SOIL TO SETTLE OVER TIME.
3. REFER TO STANDARD TREE PLANTING (L-01) FOR GENERAL PLANTING NOTES.



Department of Public Works
10455 Armstrong Street
Fairfax, VA 22030-3630

CITY of FAIRFAX

USE WITH THE FAIRFAX STANDARD SPECIFICATIONS ONLY

www.fairfaxva.gov

STANDARD STREET TREE PLANTING DETAIL

SCALE: NOT TO SCALE	L-03
REVISION DATE: JULY 2024	SHEET #: 1 of 1