


THIS DETAIL SUPERSEDES ALL OTHER DECIDUOUS TREE STAKING DETAILS IN THE CITY OF FAIRFAX.



**NOTES:**

1. STAKING AND GUYING MAY ONLY BE IMPLEMENTED WHERE SITE CONDITIONS WARRANT. PLANTED TREES WILL BE ASSESSED INDIVIDUALLY BY THE CITY OF FAIRFAX. STAKING AND GUYING WILL BE INSTALLED ONLY IF REQUIRED BY THE CITY OF FAIRFAX. CONDITIONS WHERE STAKING AND GUYING MAY BE NECESSARY TO ENSURE STABILITY INCLUDE: WINDY LOCATIONS, STEEP SLOPES, OR WHERE VANDALISM MAY BE A CONCERN.
2. STAKES OR GUYS WILL BE INSTALLED USING ACCEPTED ARBORICULTURE PRACTICES. TREES SHALL STAND PLUMB AFTER STAKING.
3. INSTALLATION WILL INCLUDE THE REMOVAL OF ALL STAKING AND GUYING MATERIAL ONE YEAR AFTER INSTALLATION. ANY HOLES LEFT BY REMOVING STAKING SHALL BE FILLED WITH APPROVED TOPSOIL/BACKFILL MIXTURE.
4. REFER TO DETAILS FOR TREE PLANTING INFORMATION.
5. 3/4" WIDE, FLAT, WOVEN POLYPROPYLENE MATERIAL ("ARBOR TIE" OR AN APPROVED EQUAL) SHALL BE LOOPED AROUND THE TREE THROUGH EACH OTHER, TWISTED AND SECURED TO THE STAKE IN A MANNER WHICH PERMITS TREE MOVEMENT AND SUPPORTS THE TREE.

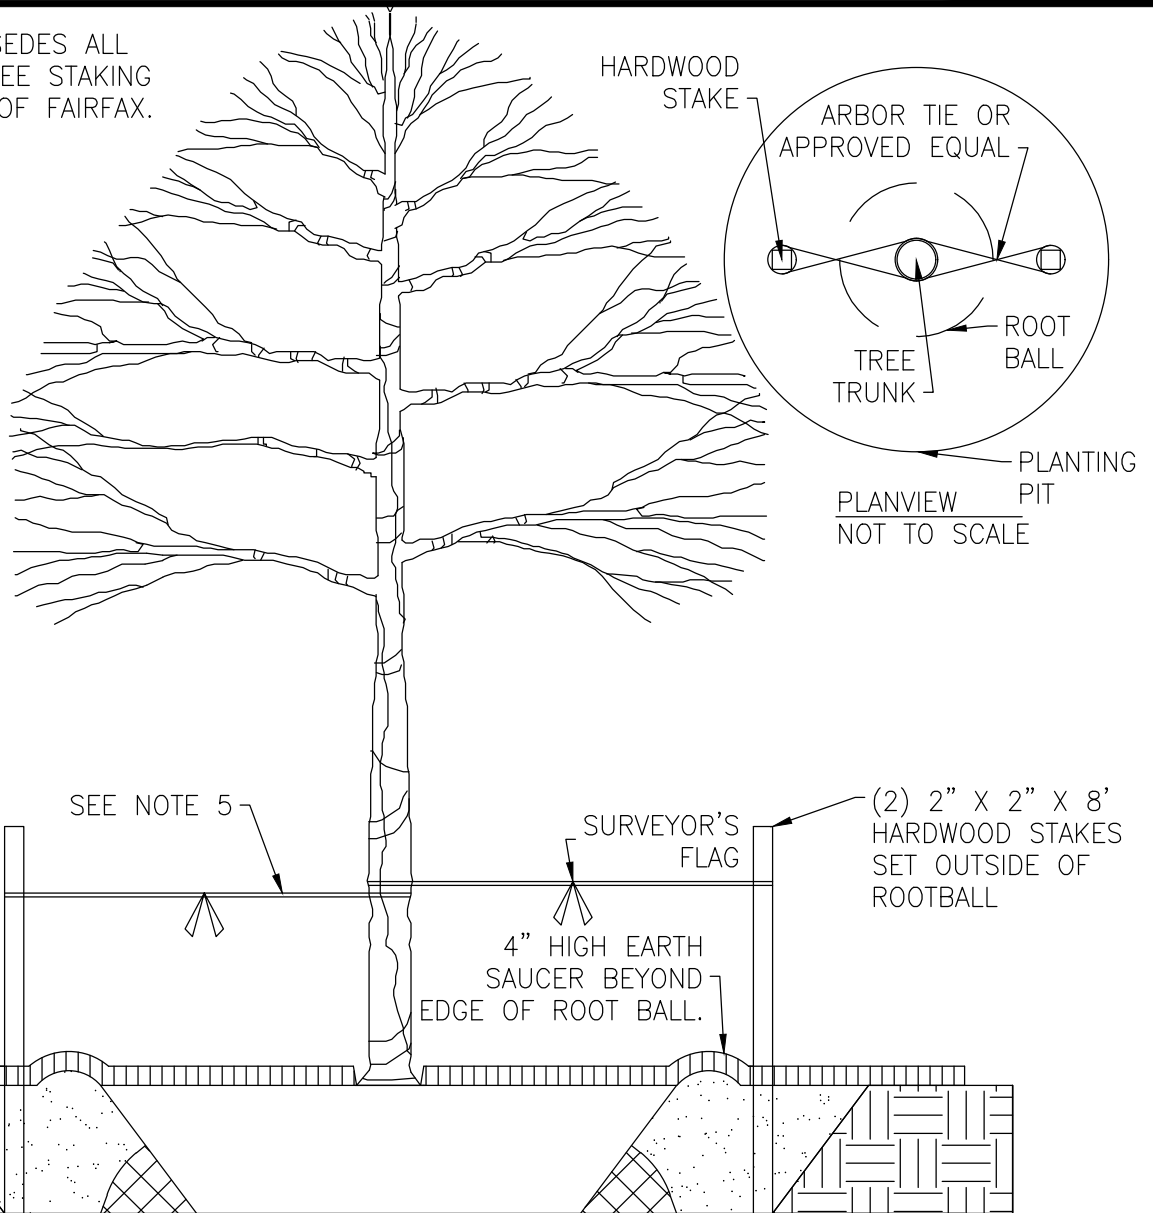

**Department of Public Works**  
**10455 Armstrong Street**  
**Fairfax, VA 22030-3630**

**CITY of FAIRFAX**

**USE WITH THE FAIRFAX STANDARD SPECIFICATIONS ONLY**

[www.fairfaxva.gov](http://www.fairfaxva.gov)

**DECIDUOUS TREE STAKING DETAIL**

SCALE:  
 NOT TO SCALE

L-04

REVISION DATE:  
 JULY 2024

SHEET #:  
 1 of 1