



WELLS + ASSOCIATES

N29 WILLOWWOOD

TRAFFIC IMPACT STUDY

CITY OF FAIRFAX, VIRGINIA

January 12, 2024



N29 WILLOWWOOD

Traffic Impact Study City of Fairfax, Virginia

April 28, 2023

Revised through January 12, 2024

Prepared for:

Capital City Real Estate

Prepared by:

Wells + Associates

Michael J. Workosky, PTP, TOPS, TSOS

John F. Cavan, P.E., PTOE

(703) 917-6620

www.WellsAndAssociates.com

 [@WellsAssoc](https://twitter.com/WellsAssoc)

 [@WellsandAssociates](https://www.facebook.com/WellsandAssociates)

 [Wells + Associates](https://www.linkedin.com/company/Wells+Associates)



TABLE OF CONTENTS

	<u>PAGE</u>
Section 1	
INTRODUCTION	1
Traffic Impact Study Requirements	1
Section 2	
BACKGROUND INFORMATION	5
Site Location and Surrounding Uses	5
Comprehensive Plan Land Use Recommendations	5
Existing Transportation Network.....	5
Future Transportation Network	6
Section 3	
STUDY SCOPE AND ANALYSIS PARAMETERS	11
Overview	11
Study Area.....	11
Site Development Program	11
Analysis Study Periods.....	11
Existing Traffic Volumes	12
Section 4	
EXISTING CONDITIONS ANALYSIS	15
Existing Intersection Levels of Service.....	15
Section 5	
ANALYSIS OF FUTURE CONDITIONS WITHOUT SITE DEVELOPMENT	18
Overview	18
Regional Traffic Growth	18
Traffic from Other Approved/Pending Developments	18
Background Traffic Forecasts	19
Background Future Levels of Service.....	19
Section 6	
SITE ANALYSIS	27
Overview	27
Proposed Site Access.....	27
Trip Generation	27
Site Trip Distribution	28
Site Trip Assignments	28

PAGE

Section 7

ANALYSIS OF FUTURE CONDITIONS WITH SITE DEVELOPMENT 31

Total Future Traffic Forecasts..... 31
Total Future Levels of Service with Proposed Development Plan 31
Transportation Demand Management..... 32

Section 8

Conclusions 39

Conclusions 39



LIST OF FIGURES

FIGURE	TITLE	<u>PAGE</u>
1-1	Site Location and Study Intersections.....	3
1-2	Proposed Development Plan	4
2-1	Comprehensive Plan Land Use Recommendations	8
2-2	Existing Lane Use and Traffic Control	9
2-3	Existing Transit Routes	10
3-1	Baseline Traffic Volumes	14
5-1	Regional Growth.....	23
5-2	Pipeline Trips	24
5-3	2026 Background Future Traffic Forecasts	25
5-4	2026 Background Future Lane Use and Traffic Control	26
6-1	Site Trip Assignments	30
7-1	2026 Total Future Traffic Forecasts	37
7-2	2026 Total Future Lane Use and Traffic Control	38

LIST OF TABLES

TABLE	TITLE	<u>PAGE</u>
3-1	Existing Trip Generation Summary	13
4-1	Baseline Intersection Levels of Service Summary	16
4-2	Total Future Intersection Queuing Summary	17
5-1	Pipeline Development Trip Generation Summary	20
5-2	Background Future Intersection Levels of Service Summary	21
5-3	Background Future Intersection Queuing Summary	22
6-1	Site Trip Generation Summary	29
7-1	Total Future Intersection Levels of Service Summary	35
7-2	Total Future Intersection Queuing Summary	36

LIST OF APPENDICES

APPENDIX	TITLE
A	City of Fairfax Scoping Agreement
B	Existing Traffic Count Data
C	Existing Capacity Analysis Worksheets
D	Individual Pipeline Development Trip Assignments
E	Background Future Capacity Analysis Worksheets
F	Total Future Capacity Analysis Worksheets

N29 Willowwood – Phase 1

SECTION 1 INTRODUCTION

This report presents the results of a traffic impact study conducted in support of the proposed development of N29 Willowwood – Phase 1, located in the City of Fairfax, Virginia. The site is currently developed with 556,310 S.F. of general office uses in four (4) buildings served by surface parking.

The subject site (Willowwood Plaza) is located on the north side of Eaton Place, between Chain Bridge Road (Route 123) and Fairfax Boulevard (US Route 50) in the City of Fairfax, Virginia, as shown on Figure 1-1.

This report has been updated to address comments provided by the City of Fairfax regarding the August 15, 2023 study. All comments have been addressed in this updated report.

The Applicant, Capital City Real Estate proposes to rezone the site from CR (Commercial Retail) to CU (Commercial Urban) and construct 260 residential multifamily units (N29 Apartments) and 5,000 S.F. of ground-level retail space on the southwest side of the property in phase 1. The subject rezoning application only applies to Phase 1 and future phases are not being considered at this time. Structured parking would be provided to accommodate the existing and proposed development. Vehicular access would be provided via the existing driveways currently serving the site on Eaton Place. For analysis purposes, the site was assumed to be fully built and occupied by 2026.

This study was conducted in accordance with a scoping agreement developed with City of Fairfax staff. The study scope was determined with City staff based on a review of key study intersections and roadways that would potentially be affected by the proposed development and the number of new vehicle trips expected to be generated by the site. The site (Phase 1) is expected to be complete by 2026.

According to the 24VAC30-155 (“Chapter 870”) regulations, all development proposals which meet certain specific trip generation thresholds are subject to the regulations as outlined in the Virginia Department of Transportation’s (VDOT) Traffic Impact Analysis Regulations Administrative Guidelines (“Administrative Guidelines”). In January 2012, an amendment to the Administrative Guidelines took effect, which determined a development proposal is considered to substantially impact the transportation network if it generates 5,000 or more net new daily vehicle trips located on, or within 3,000 feet of, a VDOT maintained roadway. Based on the trips anticipated to be generated by the subject development, the development would not require a VDOT Chapter 870 compliant traffic study.

Although a traffic impact analysis is not required per 24VAC30-155, the City of Fairfax has requested the submission of a traffic study in conjunction with this development application. Based on the traffic study scoping form provided in Appendix A, tasks undertaken to prepare this study included the following:

1. Reviewed the applicant's conceptual plans for the subject site.
2. Field reviewed the subject site in order to determine existing roadway and intersection geometrics and traffic controls, access opportunities and/or constraints, and general traffic conditions.
3. Conducted peak hour turning movement counts at the following study intersections:
 - Chain Bridge Road (Route 123)/Eaton Place/Service Roads
 - Fairfax Boulevard (US Route 50)/Eaton Place
 - Eaton Place/Willowwood Plaza Site Driveways (four locations)
4. Adjusted the existing traffic counts to establish baseline conditions.
5. Calculated existing AM and PM commuter peak hour intersection levels of service at the study intersections.
6. Identified the number of net new peak hour trips that would be generated by the proposed development based on standard Institute of Transportation Engineers (ITE) Trip Generation, 11th Edition manual rates and equations.
7. Determined future background traffic forecasts based on regional traffic growth and estimates of traffic that would be generated by other approved/planned developments in the site vicinity.
8. Calculated future levels of service with and without the proposed development at the key study intersections for a proposed buildout year of 2026.
9. Prepared an alternative analysis that evaluates the potential modification of Eaton Place from its existing four-lane undivided configuration to a three (3) lane roadway with a center left turn lane and dedicated bicycle lanes.

Sources of data for this analysis include traffic counts conducted by Wells + Associates Inc., information obtained from the City of Fairfax, the Institute of Transportation Engineers (ITE), VDOT, the Highway Capacity Manual 2000 (Synchro software, version 11), Hickok Cole, Cozen O'Connor, christopher consultants, Capital City Real Estate, and the files and library of Wells + Associates.

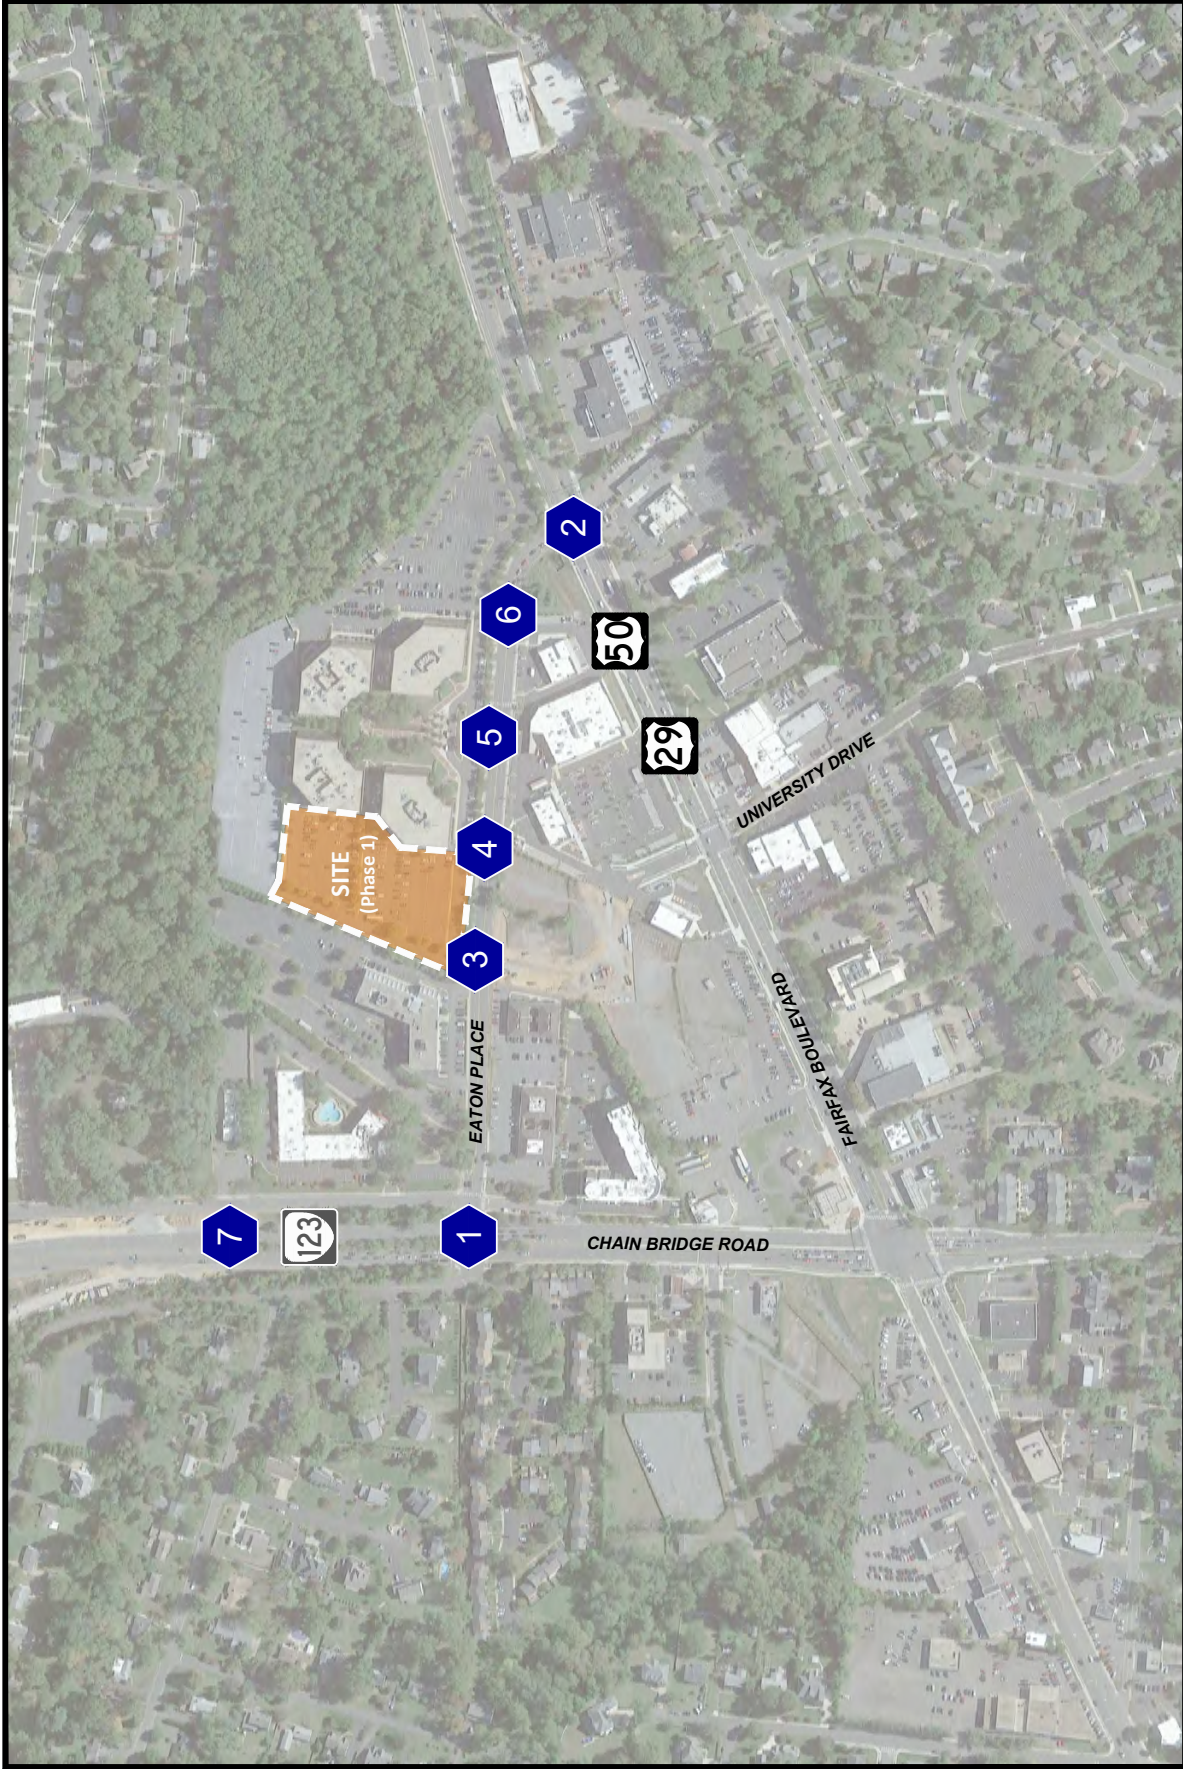



Figure 1-1
Site Location and Study Intersections

 NORTH
N29 Willowwood
City of Fairfax, Virginia

 Study Intersection



PLAN PROVIDED BY: HICKOK COLE

Figure 1-2
Proposed Development Plan



NORTH
N29 Willowwood
City of Fairfax, Virginia

SECTION 2 BACKGROUND INFORMATION

Site Location and Surrounding Uses

Regional access to the site area is provided via a full-movement interchange on Interstate 66 at Chain Bridge Road (Route 123) just northwest of the site. Local access is provided by Fairfax Boulevard (US Route 50) and four (4) driveways on Eaton Place.

The site is bordered on the north and east by open space that provides a buffer between the site and residential areas. Commercial uses are located on properties immediately west of the site and on the south side of Eaton Place.

Comprehensive Plan Land Use Recommendations

The City's 2035 Comprehensive Plan (Figure 2-1) identifies the site as part of the Northfax Activity Center Small Area Plan. The Plan recommends a mix of office retail, and multifamily residential uses on the site and within the area to increase internal trip making.

Existing Transportation Network

Existing Road Network. The following are descriptions of the roadways in the vicinity of the proposed development.

Chain Bridge Road (Route 123) is classified as an arterial roadway according to the City of Fairfax Comprehensive Plan. Chain Bridge Road is constructed as a six-lane, divided roadway with a posted speed limit of 30 miles per hour. Traffic signals are provided at major cross-streets including Eaton Place and Fairfax Boulevard (US Route 50). Service roads are also provided on both sides of Chain Bridge Road at the Eaton Place intersection. Based on 2020 VDOT average annual daily traffic (AADT) data, Chain Bridge Road carries approximately 31,000 vehicles per day (vpd).

Fairfax Boulevard (US Routes 29/50) is classified as an arterial roadway according to the City of Fairfax Comprehensive Plan. Within the vicinity of the subject site, Fairfax Boulevard is constructed as a four-lane, divided roadway with separate turn lanes provided at major intersections. It has a posted speed limit of 35 miles per hour and a traffic signal is provided at Eaton Place. Based on 2020 VDOT average annual daily traffic (AADT) data, Fairfax Boulevard east of Chain Bridge Road carries approximately 27,000 vehicles per day (vpd).

Eaton Place is a local street and is constructed as a four-lane, undivided roadway with a posted speed limit of 25 miles per hour. This roadway provides four (4) access driveways that currently serve the Willowwood Plaza property.

Existing lane use and traffic control at each of the study intersections is shown on Figure 2-2.

Public Transit Service. The site is served by the City of Fairfax’s City-University Energysaver (CUE) Bus “Green Route” along Eaton Place and the “Gold Route” along Fairfax Boulevard within the immediate vicinity of the site. The Green Route provides service between the GMU campus, Old Town Fairfax, and the Vienna/Fairfax-GMU Metrorail station via University Drive, Chain Bridge Road, Eaton Place, Fairfax Boulevard, Fairfax Circle, Arlington Boulevard, Nutley Street, Virginia Center Boulevard, Old Pickett Road, Pickett Road, Main Street, North Street, and George Mason Boulevard.

The Gold Route provides access between the George Mason University (GMU) campus and the Vienna/Fairfax-GMU Metrorail station, via University Drive, Chain Bridge Road, West Street, Main Street, Lee Highway, Jermantown Road, Orchard Street, Bevan Drive, Warwick Avenue and Fairfax Boulevard. Additionally, the site is served by the “Green Route” which provides service between the GMU campus, Old Town Fairfax, and the Vienna/Fairfax-GMU Metrorail station via University Drive, Chain Bridge Road, West Street, Main Street, Lee Highway, Jermantown Road, Orchard Street, Bevan Drive, Warwick Avenue and Fairfax Boulevard.

Metrobus Route 1C provides service between Fair Oaks Mall and Dunn Loring Metrorail Station. Bus stops are located at the Fairfax Boulevard (Routes 29/50)/Eaton Place intersection.

The existing transit routes are shown on Figure 2-3.

Pedestrian Facilities. A sidewalk is provided along the north side of Eaton Place between Chain Bridge Road (Route 123) and Fairfax Boulevard. Portions of sidewalk exist or are under construction along the south side of the roadway. Marked crosswalks are provided across the south and east legs of the Chain Bridge Road (Route 123)/Eaton Place signalized intersection and on the north and west legs of the Eaton Place/Fairfax Boulevard signalized intersection. Mid-block crosswalks are provided along Eaton Place just east of the main access drive serving the site that connects bus stops on both sides of the street as well as east of the University Boulevard Extension.

Future Transportation Network

As part of the I-66 improvement project, modifications to Chain Bridge Road are proposed. Based on plans provided by City staff, the southbound approach of Chain Bridge Road at Eton Place will be restriped to provide two left turn lanes and two through lanes. In addition, a new traffic signal will be constructed approximately 600 feet to the north of Eaton Place.


The City of Fairfax’s Comprehensive Plan provides recommended strategies for improving the City’s transportation network. The Plan recommends that the City strive to achieve a balance between allowing for the efficient movement of traffic and providing safe and convenient access to City businesses and residences for vehicles, pedestrians, bicycles, and other modes of transport.

A modification or “Road Diet” is recommended for Eaton Place to be modified from its existing four-lane undivided section to a three-lane road with a center left turn lane and bicycle lanes. This potential modification has been evaluated as part of this study.

Further, the site access roads that surround the site and those located on the south side of Eaton Place that are located within the Northfax Activity Center are planned as future “active streets” that are designed to provide major connectivity for pedestrians and vehicles for the properties in the area. The western most driveway and street within Willowwood Plaza is designated as a “linear park street” and contain the linear park greenway and are planned to include elements such as curb-less sections, provide for two-way traffic, bicycle facilities, and sidewalks. In addition, the area surrounding the site is also designated as a “Concentrated Bicycle Supportive Infrastructure” area that recommends support facilities such as short-term and long-term parking, showers, and changing facilities be provided.


An off-street trail is planned to be provided within the undeveloped open space area on the north and west sides of the site.

The Plan also calls for the establishment of a Transportation Demand Management (TDM) program to reduce overall vehicle trips and parking management strategies to make the best use of parking resources in the area.

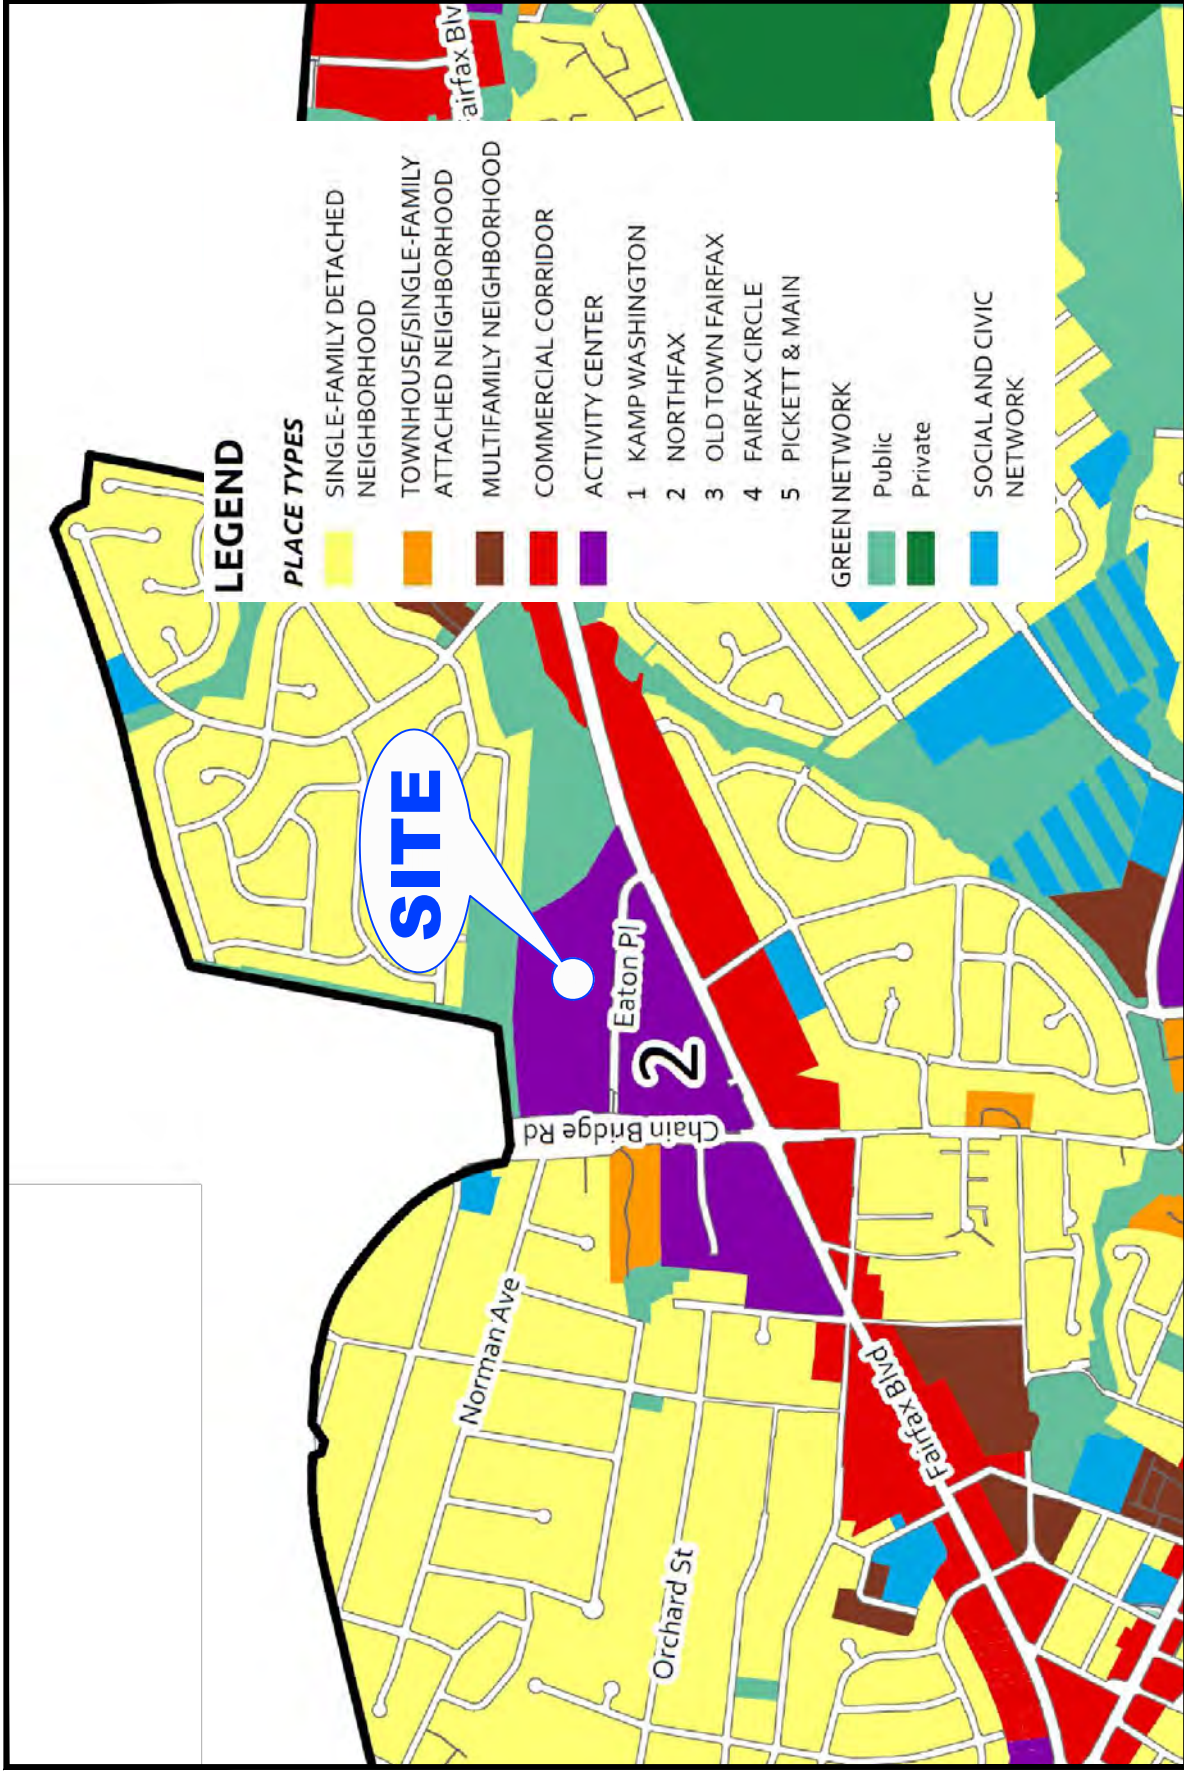




NORTH
N29 Willowwood
City of Fairfax, Virginia

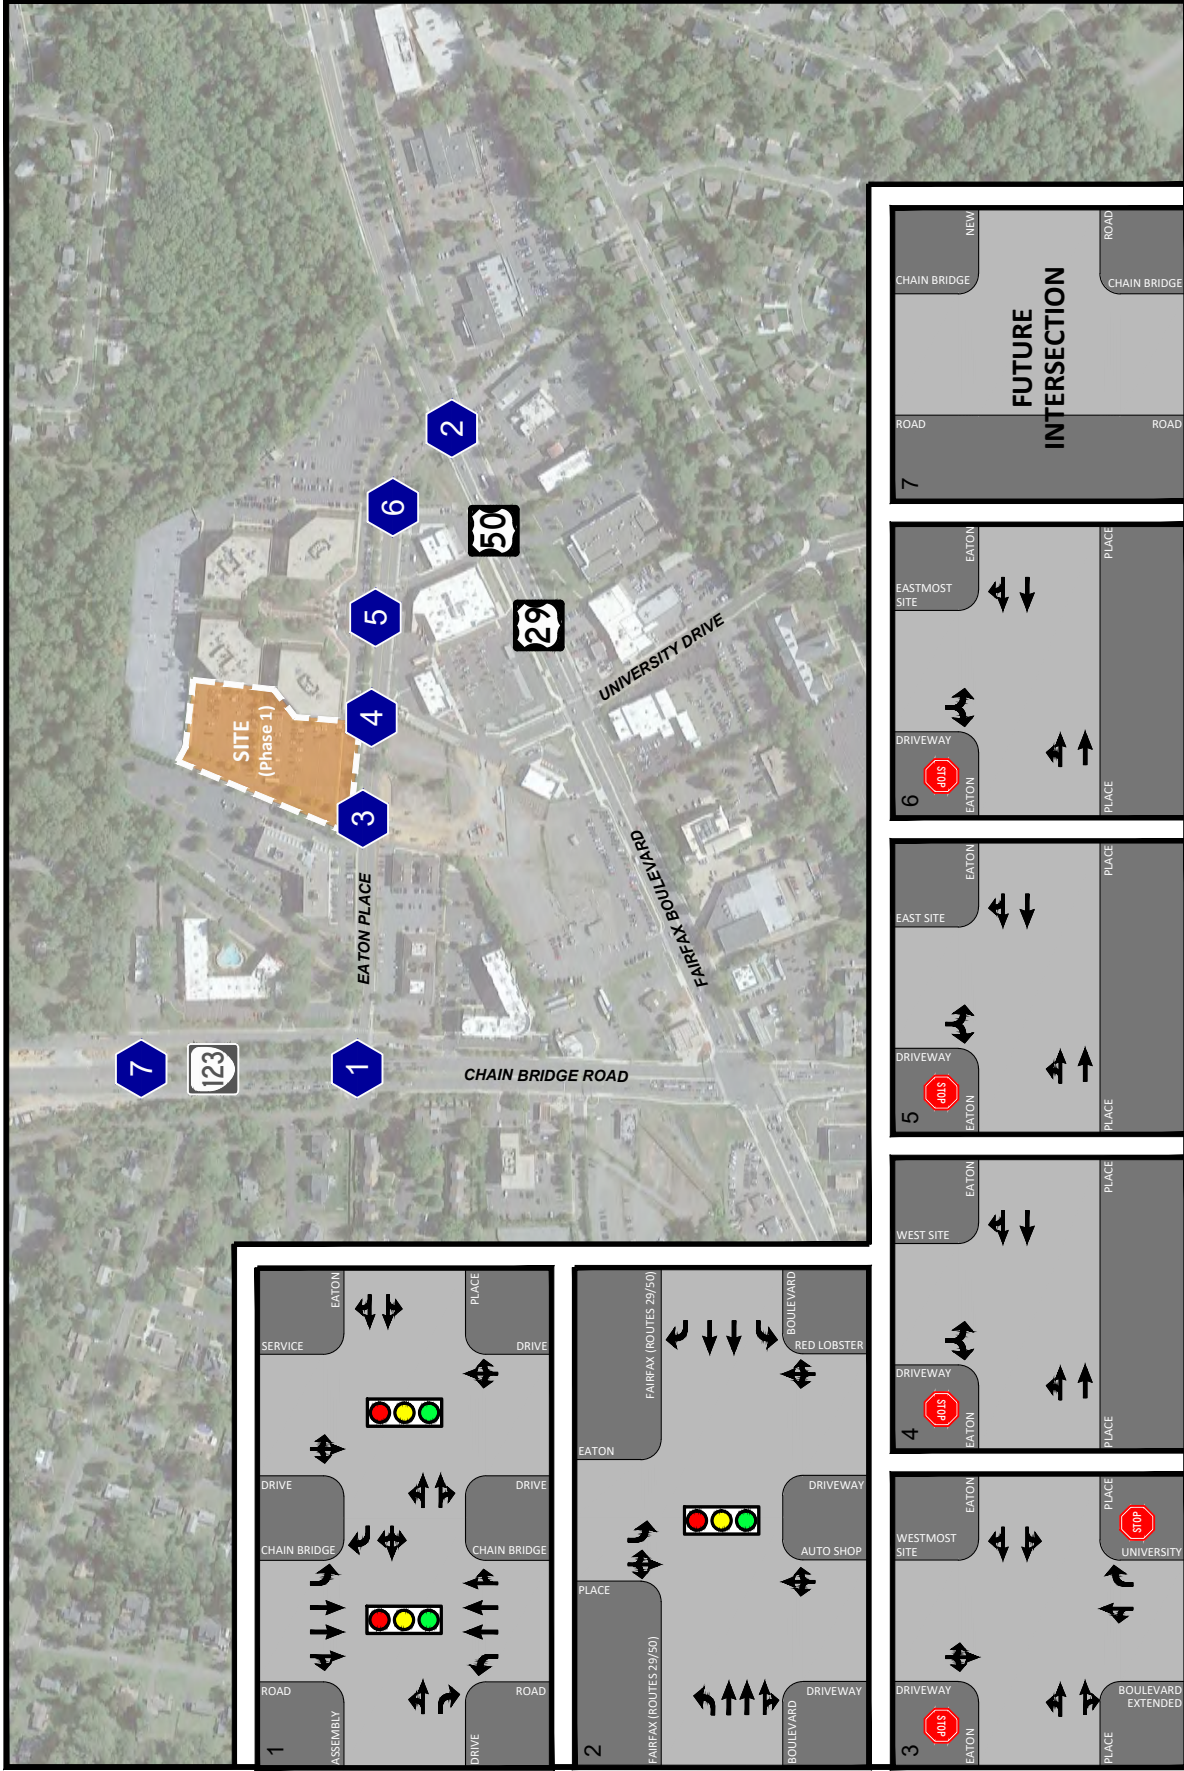
Figure 2-1
Comprehensive Plan Land Use Recommendations




 NORTH
 N29 Willowwood
 City of Fairfax, Virginia

Figure 2-2
 Existing Lane Use and Traffic Control

 Represents One Travel Lane
 Signalized Intersection
 Stop Sign

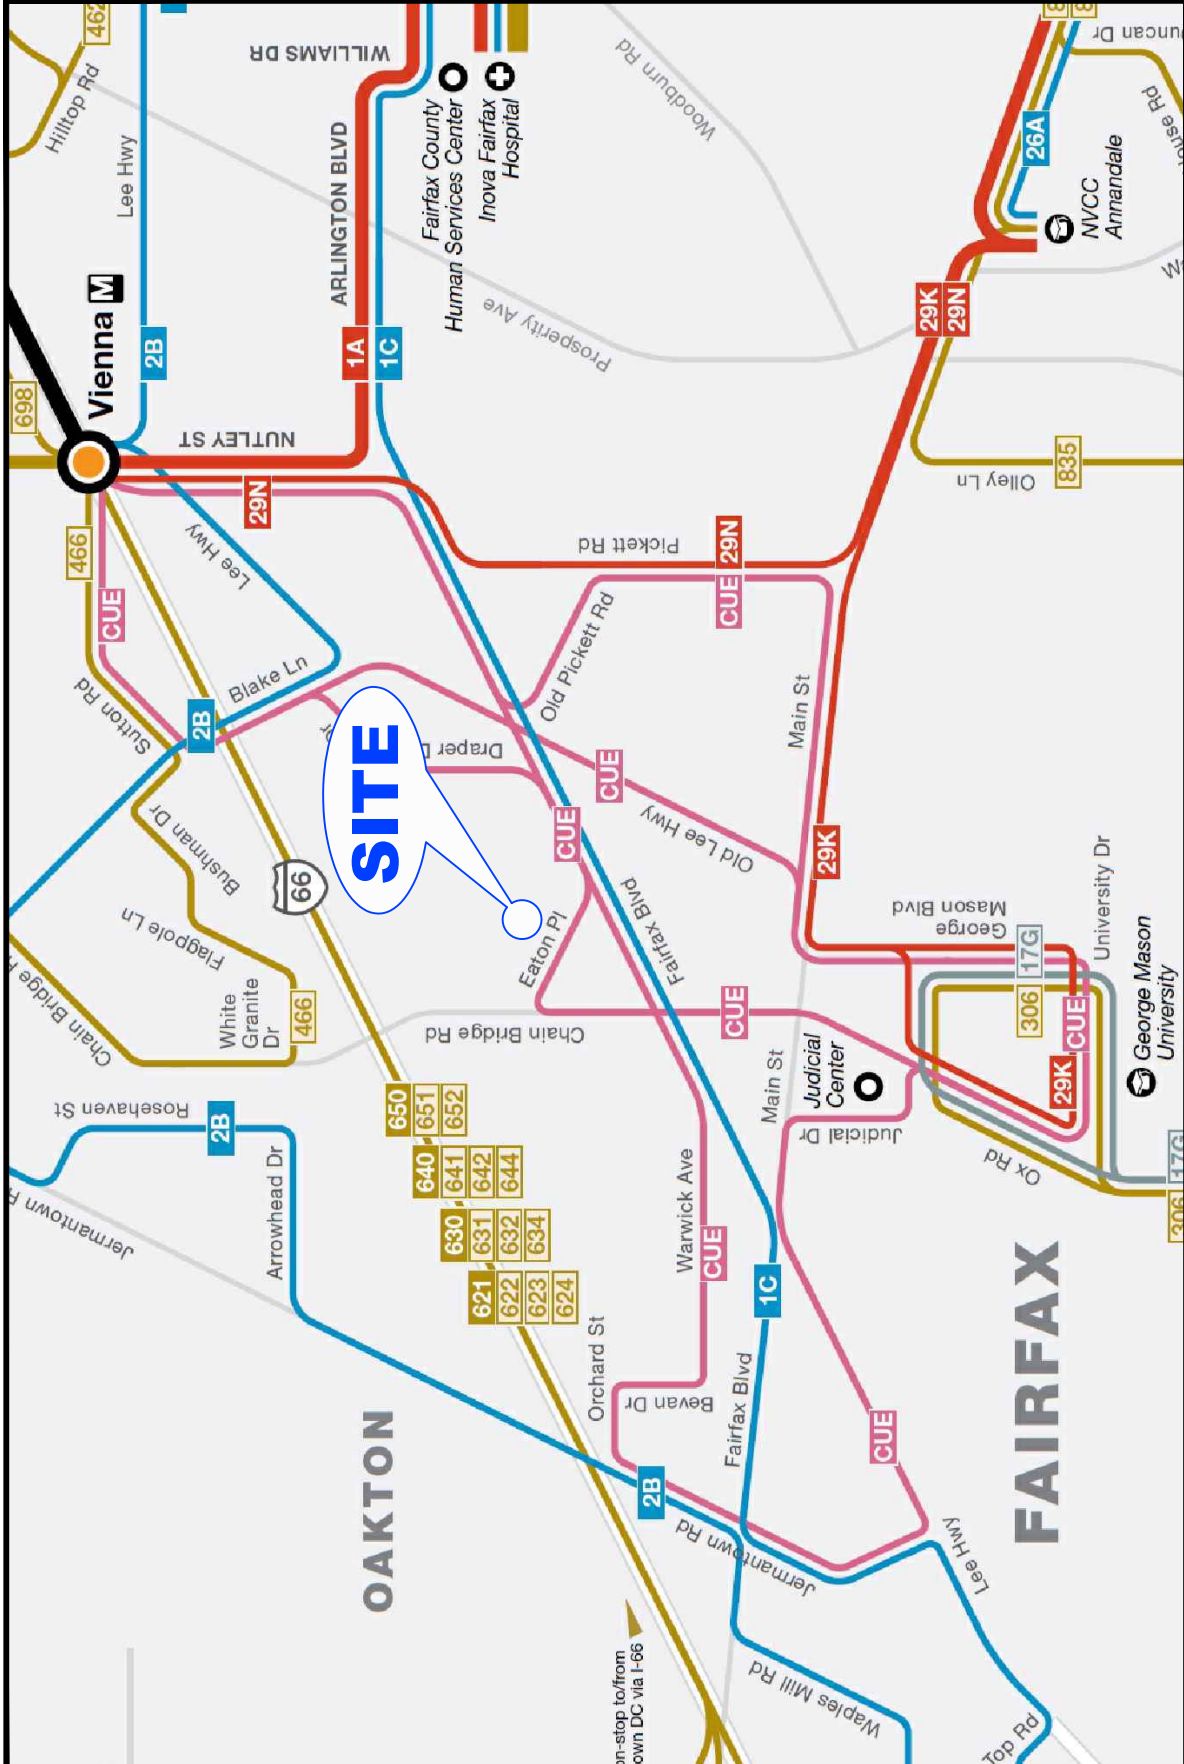

NORTH
 N29 Willowwood
 City of Fairfax, Virginia

Figure 2-3
 Existing Transit Routes

SECTION 3

STUDY SCOPE AND ANALYSIS PARAMETERS

Overview

The subject site is located on the north side of Eaton Place, between Chain Bridge Road (Route 123) and Fairfax Boulevard (US Route 50) in the City of Fairfax, Virginia. The parcel is currently developed with the Willowwood office buildings, consisting of four (4) buildings that total 556,310 S.F. of space and served by surface and garage parking. The subject site is currently zoned CR (Commercial Retail).

The primary objective of this study is to assess the impacts of the proposed development plan on the surrounding street system.

This traffic study was conducted in accordance with the scoping document and discussions with Wells + Associates, City staff, and the Applicant and has been subsequently revised based on plan revisions and discussions with City Staff. A traffic study scoping meeting was held on October 7, 2022, and resulted in a scoping form dated November 14, 2022 that is provided in Appendix A. As previously noted, the development plan includes 260 residential apartments with 5,000 S.F. of ground-level retail. Access to the site would remain as currently provided via four (4) driveways on Eaton Place.

Study Area

The study area was determined based on the intersections and roadways that potentially would be affected by implementation of the proposed development plan. The following intersections were selected for analysis and evaluation:

- Chain Bridge Road (Route 123)/Eaton Place/Service Roads
- Chain Bridge Road (Route 123)/New Road
- Fairfax Boulevard (US Route 50)/Eaton Place
- Eaton Place/Willowwood Plaza Site Driveways (four locations)/University Boulevard Extended

Site Development Program

The Applicant proposes to develop a portion (Phase 1) of the existing surface parking areas to include 260 residential multifamily apartments with 5,000 S.F. of ground-level retail space. It is noted that the subject rezoning application only applies to Phase 1 and future phases are not being considered at this time

Analysis Study Periods

The intersections within the study area were analyzed under AM and PM commuter peak hour conditions.

Existing Traffic Volumes

Existing AM and PM commuter peak hour turning movements and pedestrian counts were conducted on Tuesday, May 3, 2022 and Wednesday, November, 16, 2022, at the study intersections from 6:00 AM to 9:00 AM and from 4:00 PM to 7:00 PM. In order to account for the effects of the COVID-19 pandemic these counts were compared to previous traffic counts conducted in 2019 and summarized below:

	Route 123 (NB/SB)	Route 29/50 (EB/WB)
2019 Peak Hour Thru Volumes	3,572	5,315
2022 Peak Hour Thru Volumes	3,166	4,694
Percent Adjustment	12.8%	13.2%

As shown above, the year 2019 traffic volumes were approximately 13% higher than the current traffic counts, therefore a 13% adjustment factor was applied to through volumes on Chain Bridge Road (Route 123) and Fairfax Boulevard (Route 29/50).

Further, driveway counts were reviewed to understand the usage of the existing office buildings. The traffic counts indicated that the site currently generates 188 AM peak hour trips and 185 PM peak hour trips. As shown in Table 3-1, the ITE Trip Generation 11th Edition rate/equations estimate that 556,310 GSF of office would generate 735 AM and 690 PM peak hour trips. The net 547 AM and 505 PM peak hour trips were assigned to the road network based on the observed trip distributions. These assignments would conservatively increase traffic volumes for key movements on Eaton Place above historically counted volumes.

The baseline vehicular traffic volumes as described above are provided on Figure 3-1. All existing count data and adjustments are included in Appendix B.

Table 3-1
 N29 Willowood
 Existing Trip Generation Summary (1)

Land Use	Size	Units	ITE Code	Weekday AM Peak Hour			Weekday PM Peak Hour			Weekday ADT
				In	Out	Total	In	Out	Total	
Existing Uses										
Willowood Plaza Office	556,310	GSF	710	647	88	735	117	573	690	5,164
<i>Observed Trip Generation</i>				<i>178</i>	<i>10</i>	<i>188</i>	<i>16</i>	<i>169</i>	<i>185</i>	<i>1,850</i>
Net Additional Trips				469	78	547	101	404	505	3,314

Notes:
 (1) Trip Generation based on ITE's Trip Generation, 11th Edition.

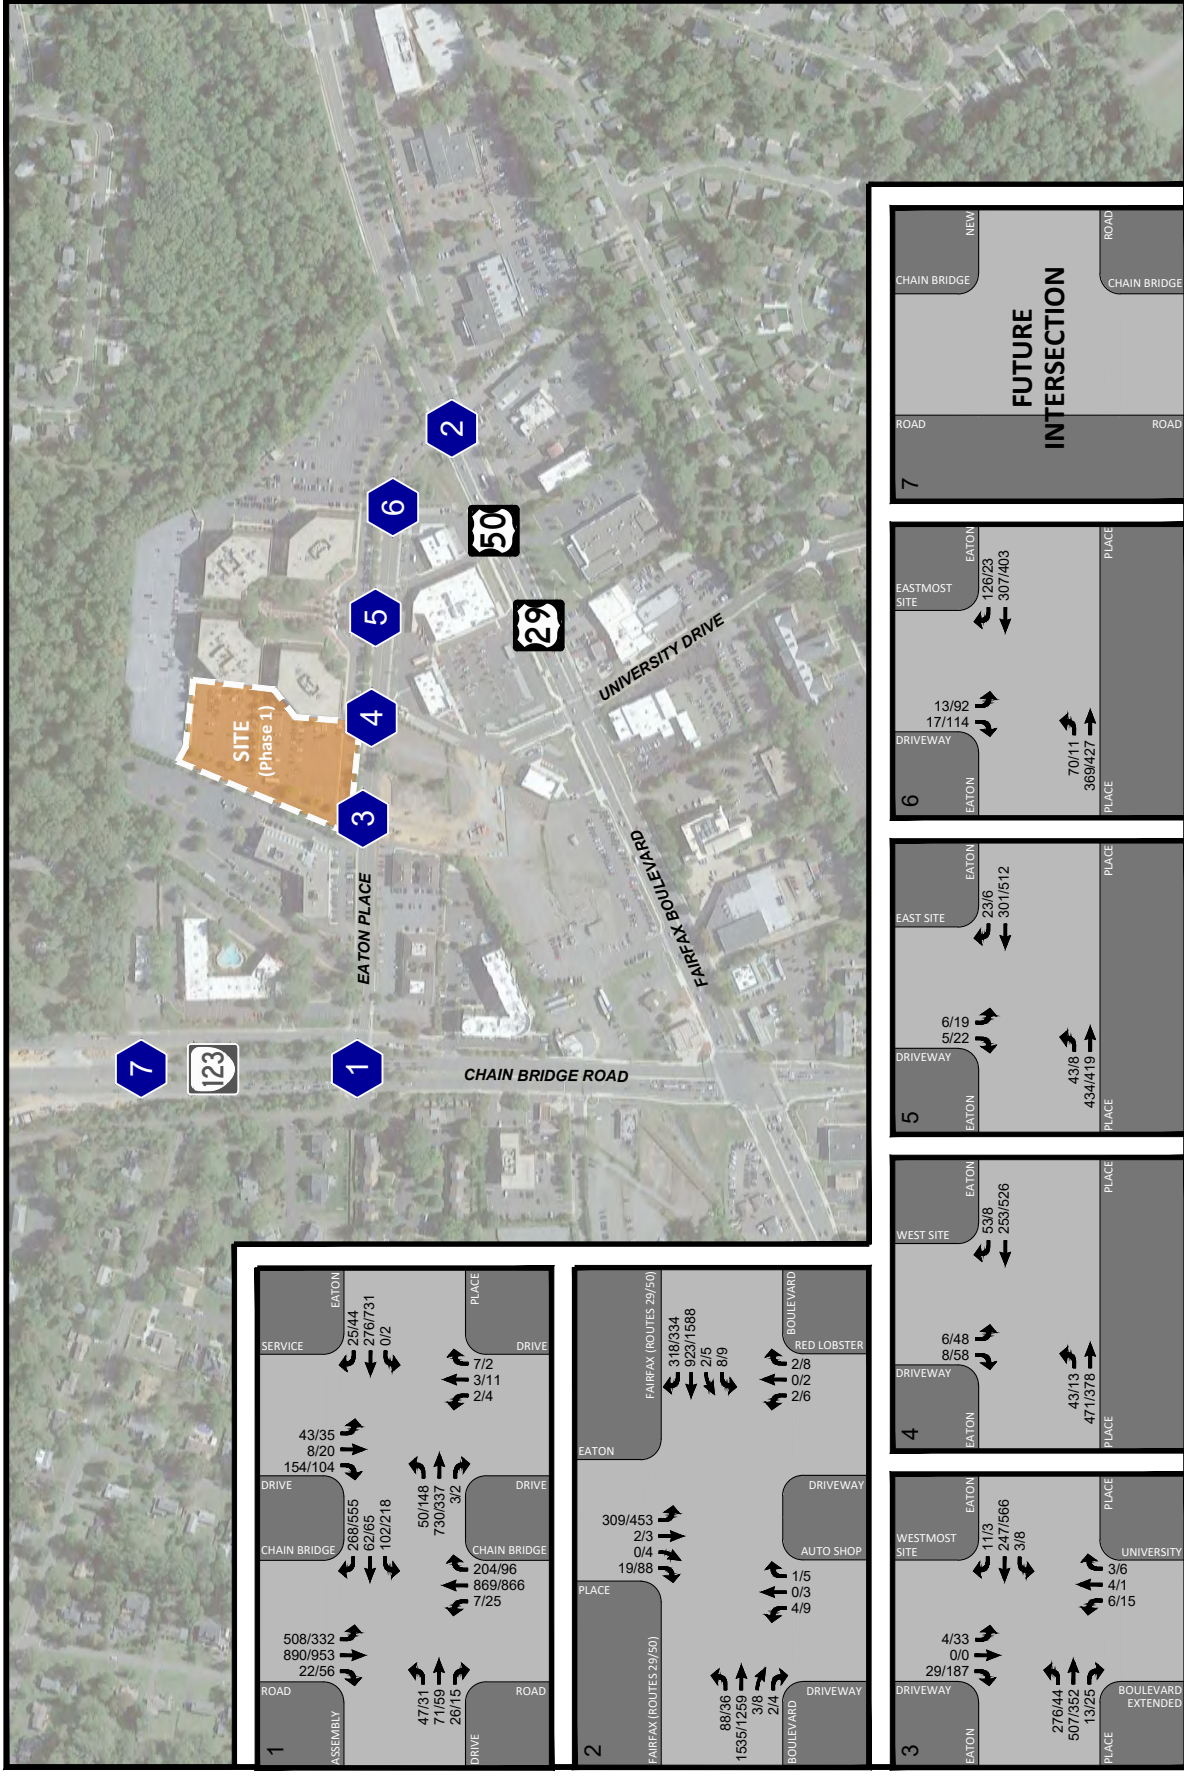


Figure 3-1
 Baseline Traffic Volumes

NORTH
 N29 Willowwood
 City of Fairfax, Virginia

SECTION 4 EXISTING CONDITIONS ANALYSIS

Existing Intersection Levels of Service

Peak hour levels of service and queues were calculated for the study intersections based on the existing lane use and traffic controls shown on Figure 2-1, the existing traffic volumes shown on Figure 3-1, and the 2000 Highway Capacity Manual (HCM) analysis procedures for signalized and unsignalized intersections. The results are presented in Appendix C and summarized on Tables 4-1 and 4-2.

The analyses indicate the following:

1. The Chain Bridge Road (Route 123)/Eaton Place signalized intersection currently operates at level of service (LOS) “F” during the AM peak hour and LOS “D” during the PM peak hour. The adjacent service streets at Eaton Place operate at LOS “D” and LOS “F” during these periods.
2. The signalized Fairfax Boulevard (US Route 50)/Eaton Place intersection currently operates at level of service (LOS) “C” during the AM peak hour and LOS “D” during the PM peak hour. The side-street approach of Eaton Place operates at LOS “F” during these periods.
3. All approaches at the unsignalized intersections serving the site on Eaton Place currently operate at acceptable levels of service (at LOS “C” or better) during both the AM and PM peak hours with the exception of the northbound approach of University Boulevard Extended that operates at LOS “E”.
4. The southbound left turn queue on Chain Bridge Road (Route 123) at Eaton Place would extend past the available storage during the AM peak hour. Sidestreet movements of Eaton Place at Chain Bridge Road (Route 123) and Fairfax Boulevard (U.S. Route 29/50) would extend past existing driveways. Queues at existing unsignalized site driveways on Eaton Place would be three (3) vehicles lengths or less.

Table 4-1
 N29 Willowood
 Baseline Intersection Levels of Service Summary (1) (2) (3) (4) (5)

Intersection	Intersection Control	Lane Group	2022 Baseline			
			AM	PM		
(1) Chain Bridge Road (Route 123)/ Eaton Place/	Signal	EBLTR	F (83.9)	F (144.7)		
		WBLT	A (5.2)	A (6.0)		
		WBR	A (0.7)	C (20.2)		
		NBL	F (95.0)	F (104.7)		
		NBTR	F (87.2)	E (57.6)		
		SBL	F (290.5)	F (89.4)		
		SBTR	<u>D (41.7)</u>	<u>D (42.2)</u>		
		Overall	F (95.3)	D (47.7)		
		Route 123 Service Drive/ Eaton Place/	Signal	EBLTR	A (3.4)	A (3.7)
				WBLTR	F (80.8)	F (235.4)
				NBLTR	F (90.0)	F (105.0)
				<u>SBLTR</u>	<u>F (191.8)</u>	<u>F (332.7)</u>
				Overall	D (51.8)	F (166.3)
		(2) Fairfax Boulevard (U.S. Route 29/50)/ Eaton Place/Private Driveways	Signal	EBL	B (14.5)	C (31.0)
EBTR	C (20.6)			C (20.9)		
WBL	B (16.1)			B (15.1)		
WBT	C (23.2)			C (33.5)		
WBR	B (19.8)			C (20.2)		
NBLTR	F (93.6)			F (106.7)		
NELTR	F (95.1)			F (107.3)		
SBL	F (108.8)			F (220.3)		
<u>SBLTR</u>	<u>F (107.9)</u>			<u>F (213.0)</u>		
Overall	C (30.3)			D (54.9)		
(3) Eaton Place/ Westmost Driveway/ University Drive Extended	Stop Sign	EBLT	A [6.0]	A [2.2]		
		WBLT	A [0.2]	A [0.3]		
		NBLT	E [47.1]	E [35.4]		
		NBR	A [8.9]	A [8.9]		
		SBLTR	B [12.5]	C [18.1]		
(4) Eaton Place/ West Driveway	Stop Sign	EBLT	A [2.1]	A [0.9]		
		SBLR	B [11.6]	C [16.3]		
(5) Eaton Place/ Middle Driveway	Stop Sign	EBLT	A [2.2]	A [0.6]		
		SBLR	B [12.9]	B [14.3]		
(6) Eaton Place/ East Driveway	Stop Sign	EBLT	A [3.6]	A [0.7]		
		SBLR	B [13.8]	C [18.0]		
(7) Chain Bridge Road (Route 123)/ New Road	Signal	WBL	-	-		
		WBR	-	-		
		NBTR	-	-		
		SBL	-	-		
		SBT	-	-		
		Overall	-	-		

Notes:

- (1) Analysis performed using Synchro software, version 110
- (2) Values in parentheses, (), represent signalized delay in seconds
- (3) Values in brackets, [], represent unsignalized delay in seconds
- (4) * - Delay exceeds 999 seconds
- (5) Roadway names in bold are considered north/south for purposes of this analysis.

Table 4-2
 N29 Willowood
 Intersection Queuing Summary (1) (2) (3) (4) (5)

Intersection	Intersection Control	Lane Group	Available Storage (ft)	2022 Baseline					
				AM		PM			
				50th %	95th %	50th %	95th %		
(1) Chain Bridge Road (Route 123)/ Eaton Place/	Signal	EBLTR	-	180	269	156	#288		
		WBLT	-	17	m28	90	m2		
		WBR	-	1	m0	93	m0		
		NBL	190	9	28	37	77		
		NBTR	-	520	#610	429	479		
		SBL	1000	~875	#1123	338	#570		
		SBTR	800	298	390	391	446		
		Route 123 Service Drive/ Eaton Place/	Signal	EBLTR	-	30	m31	23	m24
	WBLTR	-		190	265	~868	#950		
	NBLTR	-		6	32	26	61		
	SBLTR	-		~278	#486	~308	#474		
	(2) Fairfax Boulevard (U.S. Route 29/50)/ Eaton Place/Private Driveways	Signal		EBL	260	27	85	19	39
				EBTR	-	256	635	395	465
			WBL	140	3	16	7	19	
WBT			-	295	593	1021	1226		
WBR			-	64	201	145	241		
NBLTR			-	5	18	26	59		
SBL			-	242	m303	~561	m#768		
SBLTR			-	236	m292	~526	m#732		
(3) Eaton Place/ Westmost Driveway	Stop Sign	EBLT	-	-	26	-	4		
		WBLT	-	-	0	-	1		
		NBLT	-	-	9	-	10		
		NBR	-	-	0	-	1		
		SBLTR	-	-	6	-	63		
(4) Eaton Place/ West Driveway	Stop Sign	EBLT	-	-	3	-	1		
		SBLR	-	-	2	-	27		
(5) Eaton Place/ Middle Driveway	Stop Sign	EBLT	-	-	3	-	1		
		SBLR	-	-	2	-	9		
(6) Eaton Place/ East Driveway	Stop Sign	EBLT	-	-	6	-	1		
		SBLR	-	-	6	-	59		
(7) Chain Bridge Road (Route 123)/ New Road	Signal	WBL	-	-	-	-	-		
		WBR	-	-	-	-	-		
		NBTR	-	-	-	-	-		
		SBL	200	-	-	-	-		
		SBT	-	-	-	-	-		

Notes:

- (1) Analysis performed using Synchro software, version 11
- (2) "~" - 50th percentile volume exceeds capacity, queue may be longer.
- (3) "#" - 95th percentile volume exceeds capacity, queue may be longer.
- (4) "m" - Volume for 95th percentile queue is metered by upstream signal.
- (5) Roadway names in bold are considered north/south for purposes of this analysis.

SECTION 5 ANALYSIS OF FUTURE CONDITIONS WITHOUT SITE DEVELOPMENT

Overview

Forecasts for traffic conditions without the development of N29 Willowwood – Phase 1 were estimated at the study intersections based on a composite of baseline traffic volumes, regional traffic growth, and pipeline development trips as described below. Future levels of service under these forecasted conditions were evaluated at the study intersections for the anticipated buildout year of 2026.

Regional Traffic Growth

A review of VDOT AADT volumes along Fairfax Boulevard and Main Street in the vicinity of the site indicates little to no growth in traffic volumes over recent years. AADT volumes along Fairfax Boulevard declines from 40,000 vehicles in 2016 to 37,000 vehicles in 2019 while traffic volumes on Chain Bridge Road grew slightly from 38,000 vehicles in 2016 to 39,000 vehicles in 2019.

Based on these findings, existing traffic volumes were increased by 0.50% per year to the anticipated buildout of the site in 2026 and are shown on Figure 5-1.

Traffic from Other Approved/Pending Developments

At the request of City staff, the following approved/pending developments were included as approved (i.e., “pipeline”) developments:

- Breezeway Property
 - 62 Residential Townhouses
 - 10,010 SF Shopping Center
- Northfax Development
 - 56 Multifamily Dwelling Units
 - 200 Continuing Care Units
- Paul VI Redevelopment
 - 259 Residential Condominiums/Townhouses
 - 7 Single Family Dwelling Units
 - 24,000 SF of Community Space
 - 20,000 SF of Retail Space

As shown in Table 5-1, these pipeline developments are anticipated to generate 307 AM peak commuter hour trips and 617 PM commuter peak hour trips at full buildout.

Background Traffic Forecasts

The existing traffic volumes depicted on Figure 3-1, regional traffic growth shown on Figure 5-1, and the pipeline trip assignments shown on Figure 5-2 were added together to yield the background future traffic forecasts at the study intersections, shown on Figure 5-3.

Background Future Levels of Service

Peak hour levels of service and queues were calculated for the study intersections based on the future lane use and traffic controls shown on Figure 5-4, background future traffic forecasts, and the 2000 Highway Capacity Manual (HCM) analysis procedures for signalized and unsignalized intersections. The results are provided in Appendix D, and summarized in Tables 5-2 and 5-3.

The analyses indicate the following:

1. The Chain Bridge Road (Route 123)/Eaton Place signalized intersection would operate at level of service (LOS) “E” during the AM peak hour and LOS “D” during the PM peak hour with the installation of dual southbound left turn lanes. The adjacent service streets at Eaton Place would continue to operate at LOS “D” and LOS “F” during these periods.
2. The signalized Fairfax Boulevard (US Route 50)/Eaton Place intersection would operate at level of service (LOS) “C” during the AM peak hour and LOS “E” during the PM peak hour. The side-street approach of Eaton Place operates at LOS “F” during these periods.
3. All approaches at the unsignalized intersections serving the site on Eaton Place would continue to operate at acceptable levels of service (at LOS “C” or better) during both the AM and PM peak hours with the exception of the northbound approach of University Boulevard Extended that would operate at LOS “E”.
4. The planned signalized intersection north of Eaton Place on Chain Bridge Road (Route 123) would operate at overall level of service “B” or better during both peak periods. Side-street and left-turning movements would experience higher delays due to the long corridor signal cycle lengths.
5. The planned improvements at Chain Bridge Road (Route 123)/Eaton Place would reduce southbound-left turn queues to below 400 feet and could be accommodated within the proposed storage. Other queues would increase when compared to existing conditions due to regional growth and pipeline developments.

Table 5-1
 N29 Willowood
 Pipeline Trip Generation Summary (1)

Land Use	Weekday AM Peak Hour		Weekday PM Peak Hour		Weekday ADT
	In	Out	In	Out	
<u>Pipeline Development:</u>					
Breezeway Property 62 Residential Townhouses 10,010 SF Shopping Center	13	27	74	66	1,644
Northfax West Development 56 Multifamily Dwelling Units 200 Continuing Care Units	23	28	31	31	801
Paul VI Redevelopment 259 Residential Condominiums/Townhouses 7 Single Family Dwelling Units 24,000 SF of Community Space 20,000 SF of Retail Space	71	145	202	213	4,961
Total Pipeline Development Trips	107	200	307	310	7,406

Notes:
 (1) Trip Generation based previously prepared traffic studies.

Table 5-2
N29 Willowood
Background Future Intersection Levels of Service Summary (1) (2) (3) (4) (5)

Intersection	Intersection Control	Lane Group	2022 Baseline		2026 Background Future			
			AM	PM	AM	PM		
(1) Chain Bridge Road (Route 123)/ Eaton Place/	Signal	EBLTR	F (83.9)	F (144.7)	F (83.9)	F (126.0)		
		WBLT	A (5.2)	A (6.0)	A (3.0)	A (6.1)		
		WBR	A (0.7)	C (20.2)	A (0.7)	C (30.4)		
		NBL	F (95.0)	F (104.7)	F (92.7)	F (104.7)		
		NBTR	F (87.2)	E (57.6)	F (101.8)	E (56.7)		
		SBL	F (290.5)	F (89.4)	F (239.3)	F (89.7)		
		<u>SBTR</u>	<u>D (41.7)</u>	<u>D (42.2)</u>	<u>D (50.2)</u>	<u>D (41.1)</u>		
		Overall	F (95.3)	D (47.7)	F (93.9)	D (48.1)		
		With Proposed Changes to Southbound Approach (2 Left Lanes and 2 Thru Lanes)	EBLTR	-	-	F (83.9)	F (126.0)	
		WBLT	-	-	A (3.0)	A (6.1)		
		WBR	-	-	A (0.7)	C (30.4)		
		NBL	-	-	F (92.7)	F (104.7)		
		NBTR	-	-	F (94.5)	D (54.9)		
		SBL	-	-	E (78.1)	F (101.2)		
		<u>SBTR</u>	-	-	<u>E (58.9)</u>	<u>D (47.8)</u>		
		Overall	-	-	E (69.4)	D (50.8)		
		Route 123 Service Drive/ Eaton Place/	Signal	EBLTR	A (3.4)	A (3.7)	A (3.8)	A (3.4)
		WBLTR		F (80.8)	F (235.4)	F (83.0)	F (244.2)	
		NBLTR		F (90.0)	F (105.0)	F (90.0)	F (105.2)	
<u>SBLTR</u>	<u>F (191.8)</u>	<u>F (332.7)</u>		<u>F (96.6)</u>	<u>F (125.0)</u>			
Overall	D (51.8)	F (166.3)		D (35.5)	F (155.8)			
(2) Fairfax Boulevard (U.S. Route 29/50)/ Eaton Place/Private Driveways	Signal	EBL	B (14.5)	C (31.0)	B (15.5)	D (38.7)		
		EBTR	C (20.6)	C (20.9)	C (21.7)	C (21.5)		
		WBL	B (16.1)	B (15.1)	B (17.2)	B (15.5)		
		WBT	C (23.2)	C (33.5)	C (24.5)	D (37.0)		
		WBR	B (19.8)	C (20.2)	C (20.7)	C (20.5)		
		NBLTR	F (93.6)	F (106.7)	F (93.6)	F (106.7)		
		NELTR	F (95.1)	F (107.3)	F (95.1)	F (107.3)		
		SBL	F (108.8)	F (220.3)	F (107.2)	F (227.5)		
		<u>SBLTR</u>	<u>F (107.9)</u>	<u>F (213.0)</u>	<u>F (106.2)</u>	<u>F (218.5)</u>		
		Overall	C (30.3)	D (54.9)	C (31.0)	E (56.5)		
		(3) Eaton Place/ Westmost Driveway/ University Drive Extended	Stop Sign	EBLT	A [6.0]	A [2.2]	A [6.0]	A [2.2]
WBLT	A [0.2]			A [0.3]	A [0.2]	A [0.3]		
NBLT	E [47.1]			E [35.4]	E [49.0]	E [36.5]		
NBR	A [8.9]			A [8.9]	A [8.9]	A [9.0]		
SBLTR	B [12.5]			C [18.1]	B [12.7]	C [18.5]		
(4) Eaton Place/ West Driveway	Stop Sign	EBLT	A [2.1]	A [0.9]	A [2.0]	A [0.9]		
		SBLR	B [11.6]	C [16.3]	B [11.5]	C [16.4]		
(5) Eaton Place/ Middle Driveway	Stop Sign	EBLT	A [2.2]	A [0.6]	A [2.2]	A [0.6]		
		SBLR	B [12.9]	B [14.3]	B [13.0]	B [14.5]		
(6) Eaton Place/ East Driveway	Stop Sign	EBLT	A [3.6]	A [0.7]	A [3.6]	A [0.7]		
		SBLR	B [13.8]	C [18.0]	B [14.0]	C [18.4]		
(7) Chain Bridge Road (Route 123)/ New Road	Signal	WBL	-	-	F (84.4)	F (99.5)		
		WBR	-	-	F (84.5)	F (99.6)		
		NBTR	-	-	C (30.2)	A (3.2)		
		SBL	-	-	F (96.8)	F (109.1)		
		SBT	-	-	<u>A (4.1)</u>	<u>A (3.6)</u>		
		Overall	-	-	B (19.1)	A (8.2)		

Notes:

- (1) Analysis performed using Synchro software, version 110
- (2) Values in parentheses, (), represent signalized delay in seconds
- (3) Values in brackets, [], represent unsignalized delay in seconds
- (4) * - Delay exceeds 999 seconds
- (5) Roadway names in bold are considered north/south for purposes of this analysis.


N29 Willowood – Phase 1
Traffic Impact Study
January 12, 2024

Table 5-3
N29 Willowood
Background Future Intersection Queuing Summary (1) (2) (3) (4) (5)

Intersection	Intersection Control	Lane Group	Available Storage (ft)	2022 Baseline				2026 Background Future			
				AM		PM		AM		PM	
				50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %
(1) Chain Bridge Road (Route 123)/ Eaton Place/	Signal	EBLTR	-	180	269	156	#288	180	269	156	#288
		WBLT	-	17	m28	90	m2	7	m12	104	m0
		WBR	-	1	m0	93	m0	0	m0	93	m0
		NBL	190	9	28	37	77	14	39	44	87
		NBTR	-	520	#610	429	479	~587	#684	471	522
		SBL	400	~875	#1123	338	#570	~773	#1018	327	#520
		SBTR	800	298	390	391	446	361	465	368	397
		With Proposed Changes to Southbound Approach (2 Left Lanes and 2 Thru Lanes)		EBLTR	-	-	-	-	180	269	156
	WBLT	-	-	-	-	-	7	m12	104	m0	
	WBR	-	-	-	-	-	0	m0	93	m0	
	NBL	190	-	-	-	-	14	39	44	87	
	NBTR	-	-	-	-	-	~587	#684	461	522	
	SBL	400	-	-	-	-	312	383	224	287	
	SBTR	800	-	-	-	-	584	764	721	570	
Route 123 Service Drive/ Eaton Place/	Signal	EBLTR	-	30	m31	23	m24	36	m31	21	22
		WBLTR	-	190	265	~868	#950	197	274	~891	#969
		NBLTR	-	6	32	26	61	6	32	26	61
		SBLTR	-	~278	#486	~308	#474	155	#331	101	#173
(2) Fairfax Boulevard (U.S. Route 29/50)/ Eaton Place/Private Driveways	Signal	EBL	260	27	85	19	39	28	88	19	42
		EBTR	-	256	635	395	465	278	689	437	512
		WBL	140	3	16	7	19	3	16	7	19
		WBT	-	295	593	1021	1226	316	641	1174	1408
		WBR	-	64	201	145	241	70	216	158	257
		NBLTR	-	5	18	26	59	5	18	26	59
		SBL	-	242	m303	~561	m#768	244	m314	~581	#814
		SBLTR	-	236	m292	~526	m#732	238	m308	~544	#774
		NEBLTR	-	7	26	26	59	7	26	26	59
(3) Eaton Place/ Westmost Driveway	Stop Sign	EBLT	-	-	26	-	4	-	26	-	4
		WBLT	-	-	0	-	1	-	0	-	1
		NBLT	-	-	9	-	10	-	10	-	11
		NBR	-	-	0	-	1	-	0	-	1
		SBLTR	-	-	6	-	63	-	6	-	65
(4) Eaton Place/ West Driveway	Stop Sign	EBLT	-	-	3	-	1	-	3	-	1
		SBLR	-	-	2	-	27	-	2	-	27
(5) Eaton Place/ Middle Driveway	Stop Sign	EBLT	-	-	3	-	1	-	3	-	1
		SBLR	-	-	2	-	9	-	2	-	9
(6) Eaton Place/ East Driveway	Stop Sign	EBLT	-	-	6	-	1	-	6	-	1
		SBLR	-	-	6	-	59	-	6	-	60
(7) Chain Bridge Road (Route 123)/ New Road	Signal	WBL	-	-	-	-	-	4	15	7	24
		WBR	-	-	-	-	-	0	52	0	67
		NBTR	-	-	-	-	-	559	m568	10	546
		SBL	200	-	-	-	-	59	109	84	142
		SBT	-	-	-	-	-	172	417	159	380

Notes:
(1) Analysis performed using Synchro software, version 11
(2) "-" - 50th percentile volume exceeds capacity, queue may be longer.
(3) "#" - 95th percentile volume exceeds capacity, queue may be longer.
(4) "m" - Volume for 95th percentile queue is metered by upstream signal.
(5) Roadway names in bold are considered north/south for purposes of this analysis.




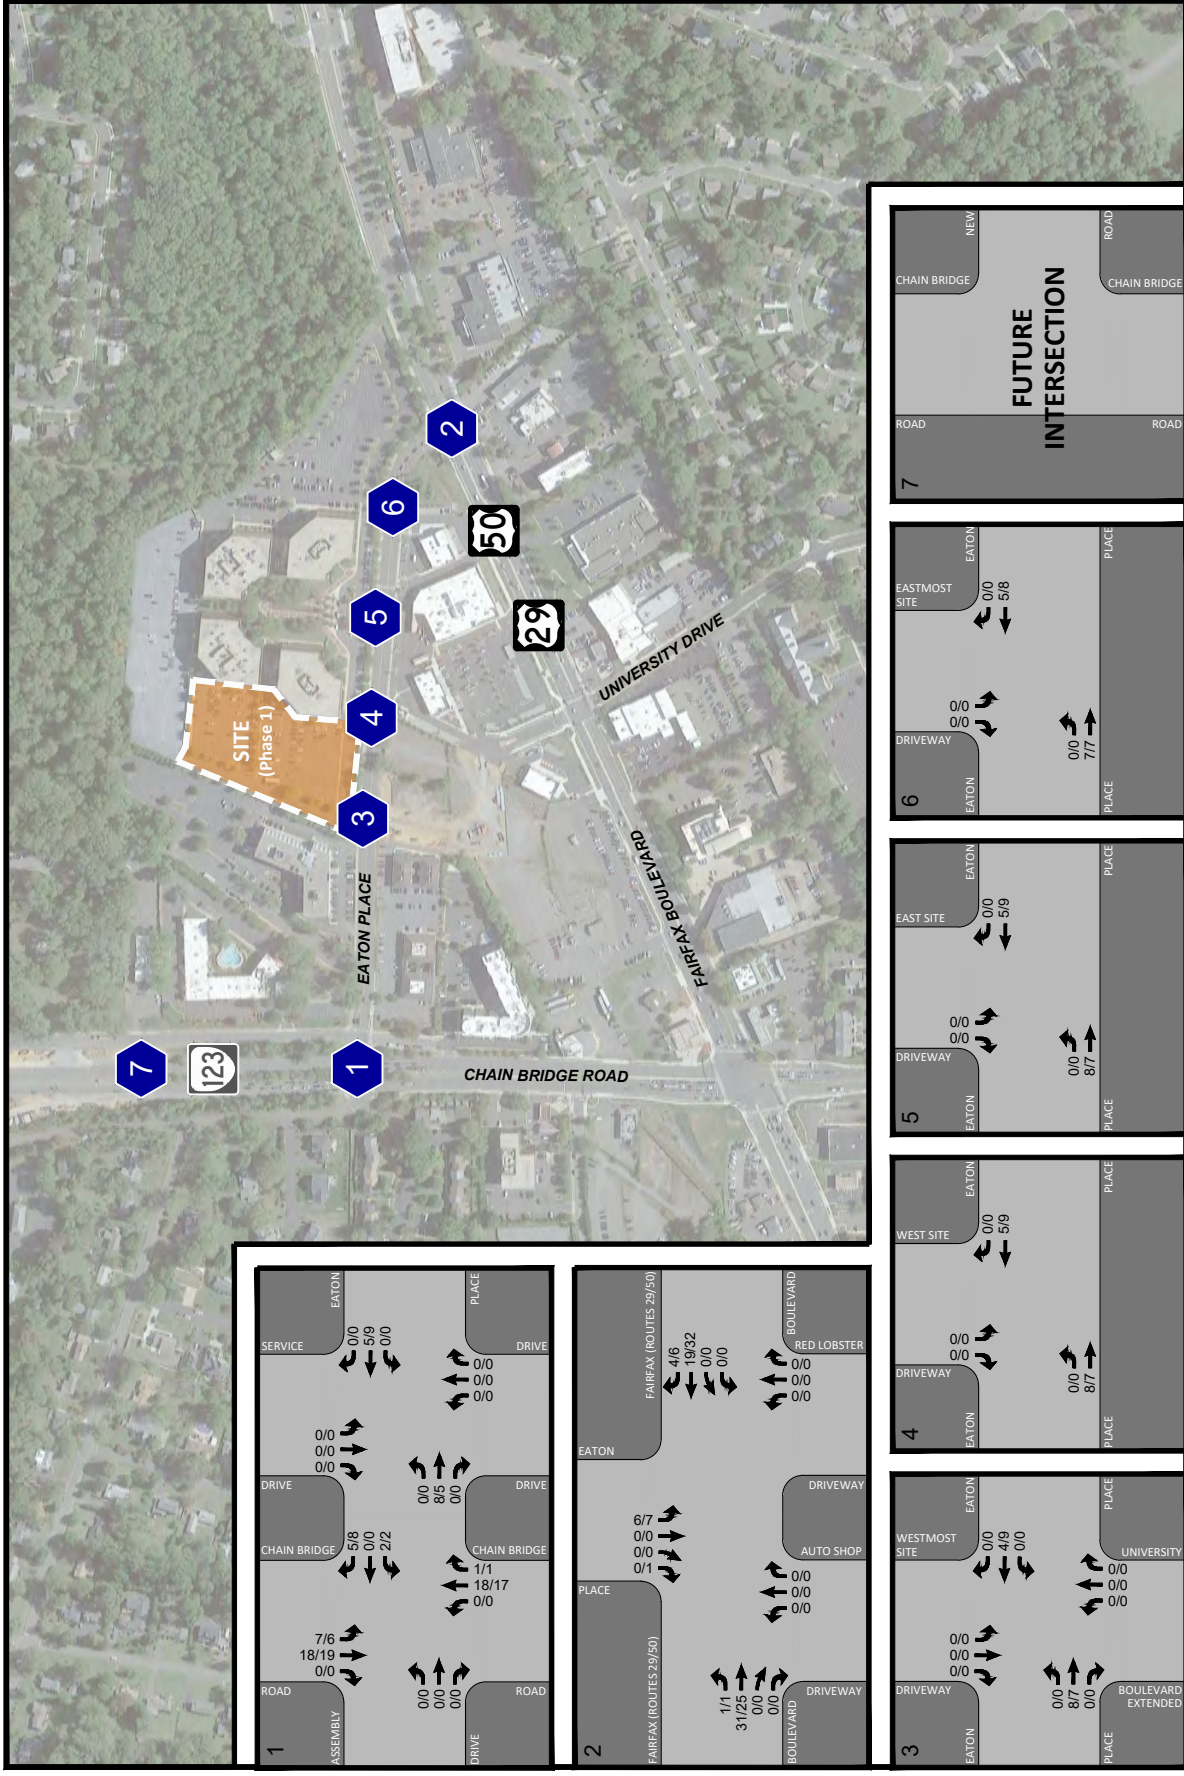


 NORTH
 N29 Willowwood
 City of Fairfax, Virginia

Figure 5-1
 Regional Growth


 AM PEAK HOUR
 PM PEAK HOUR
 000 / 000

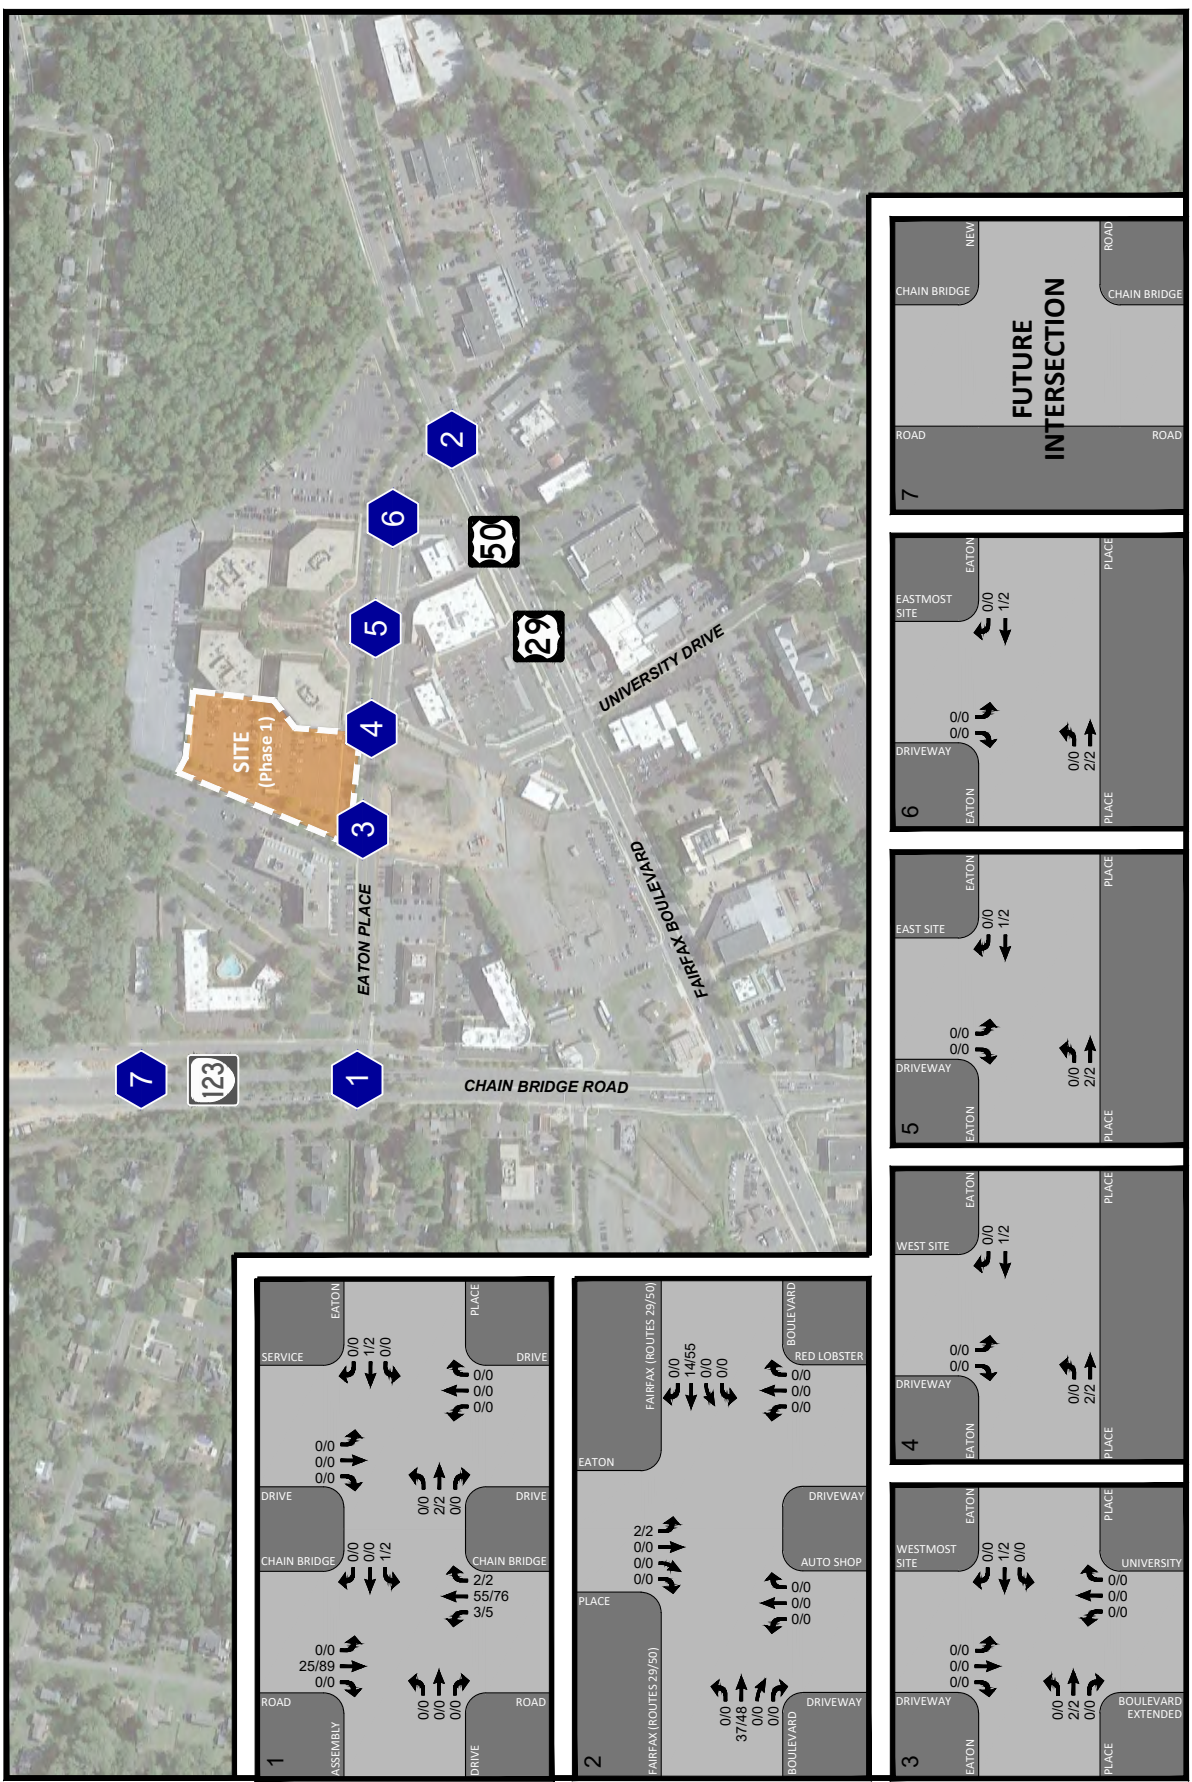

← NORTH
 N29 Willowwood
 City of Fairfax, Virginia

AM PEAK HOUR
 PM PEAK HOUR
 000 / 000

Figure 5-2
 Pipeline Trips

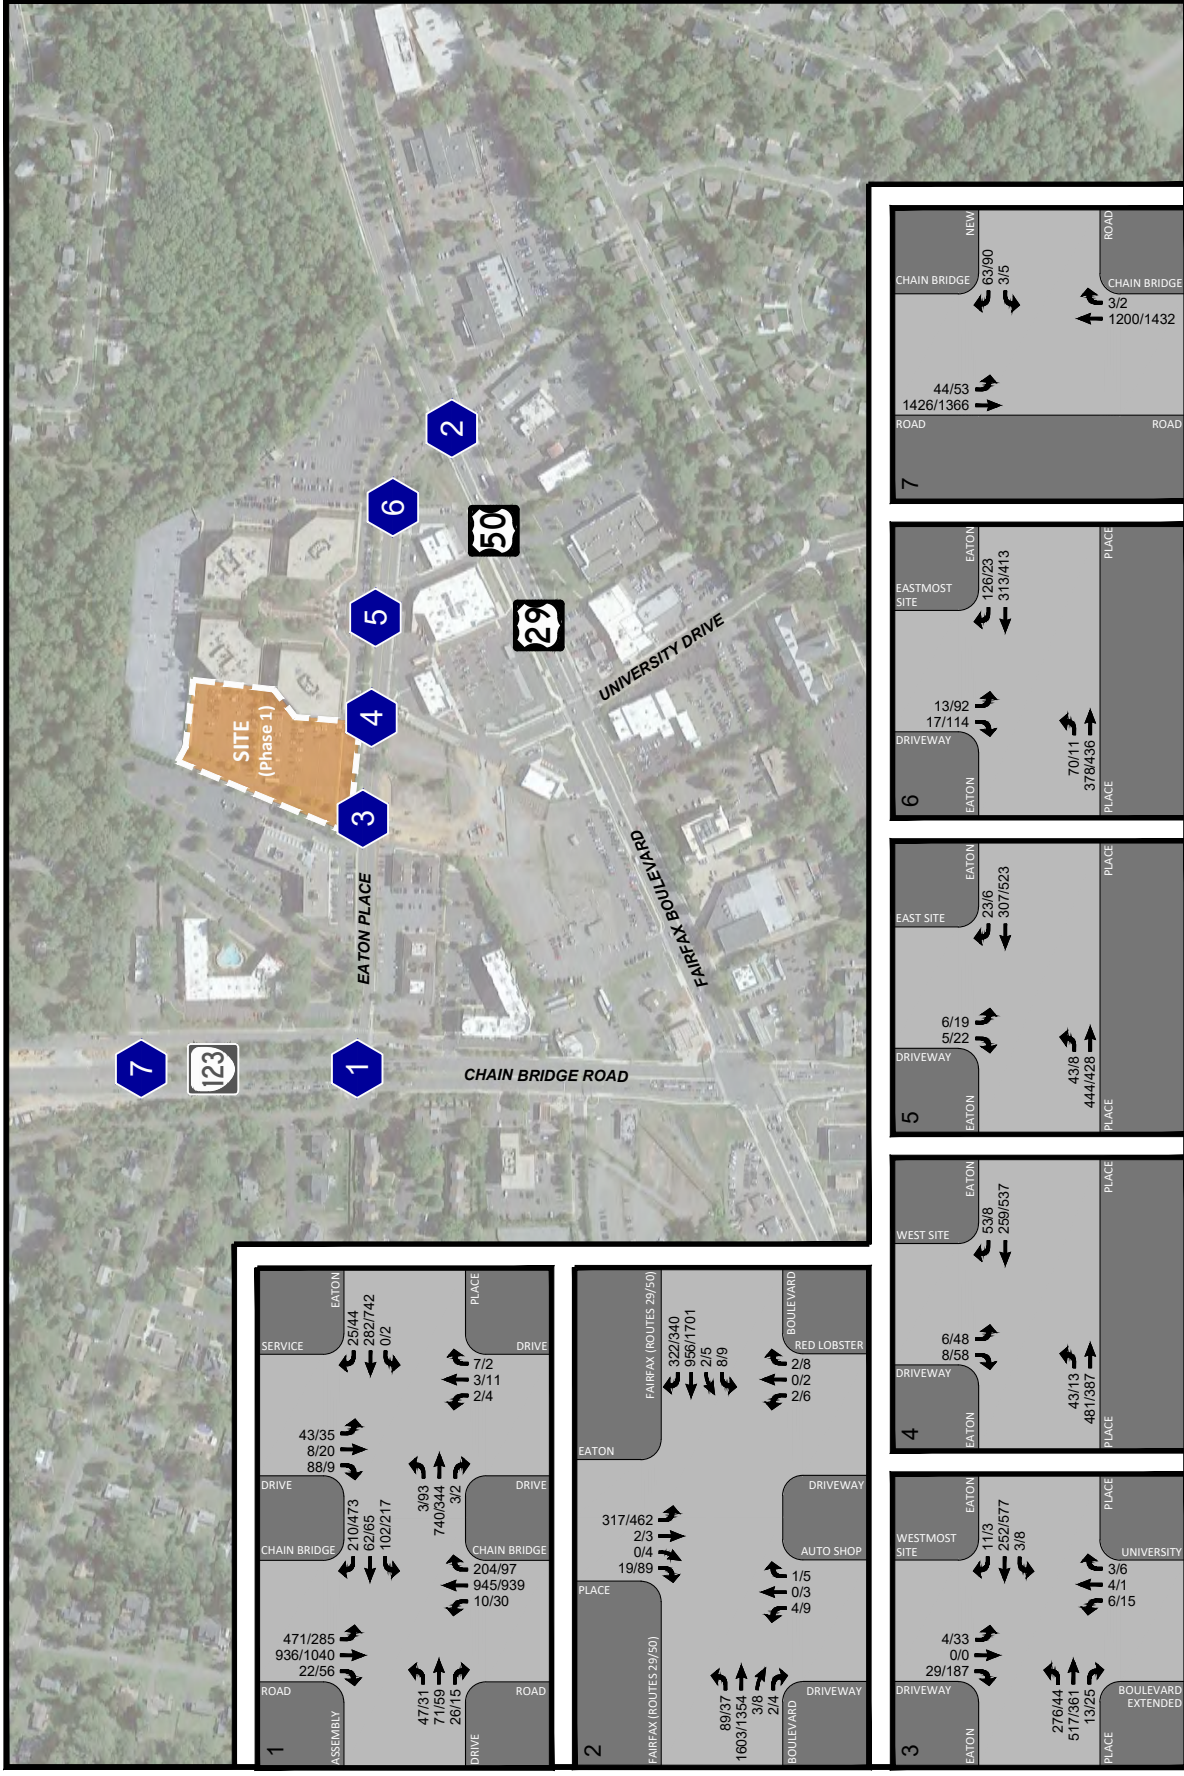


← NORTH
N29 Willowwood
City of Fairfax, Virginia

Figure 5-3
2026 Background Future Traffic Forecasts

AM PEAK HOUR
PM PEAK HOUR
000 / 000



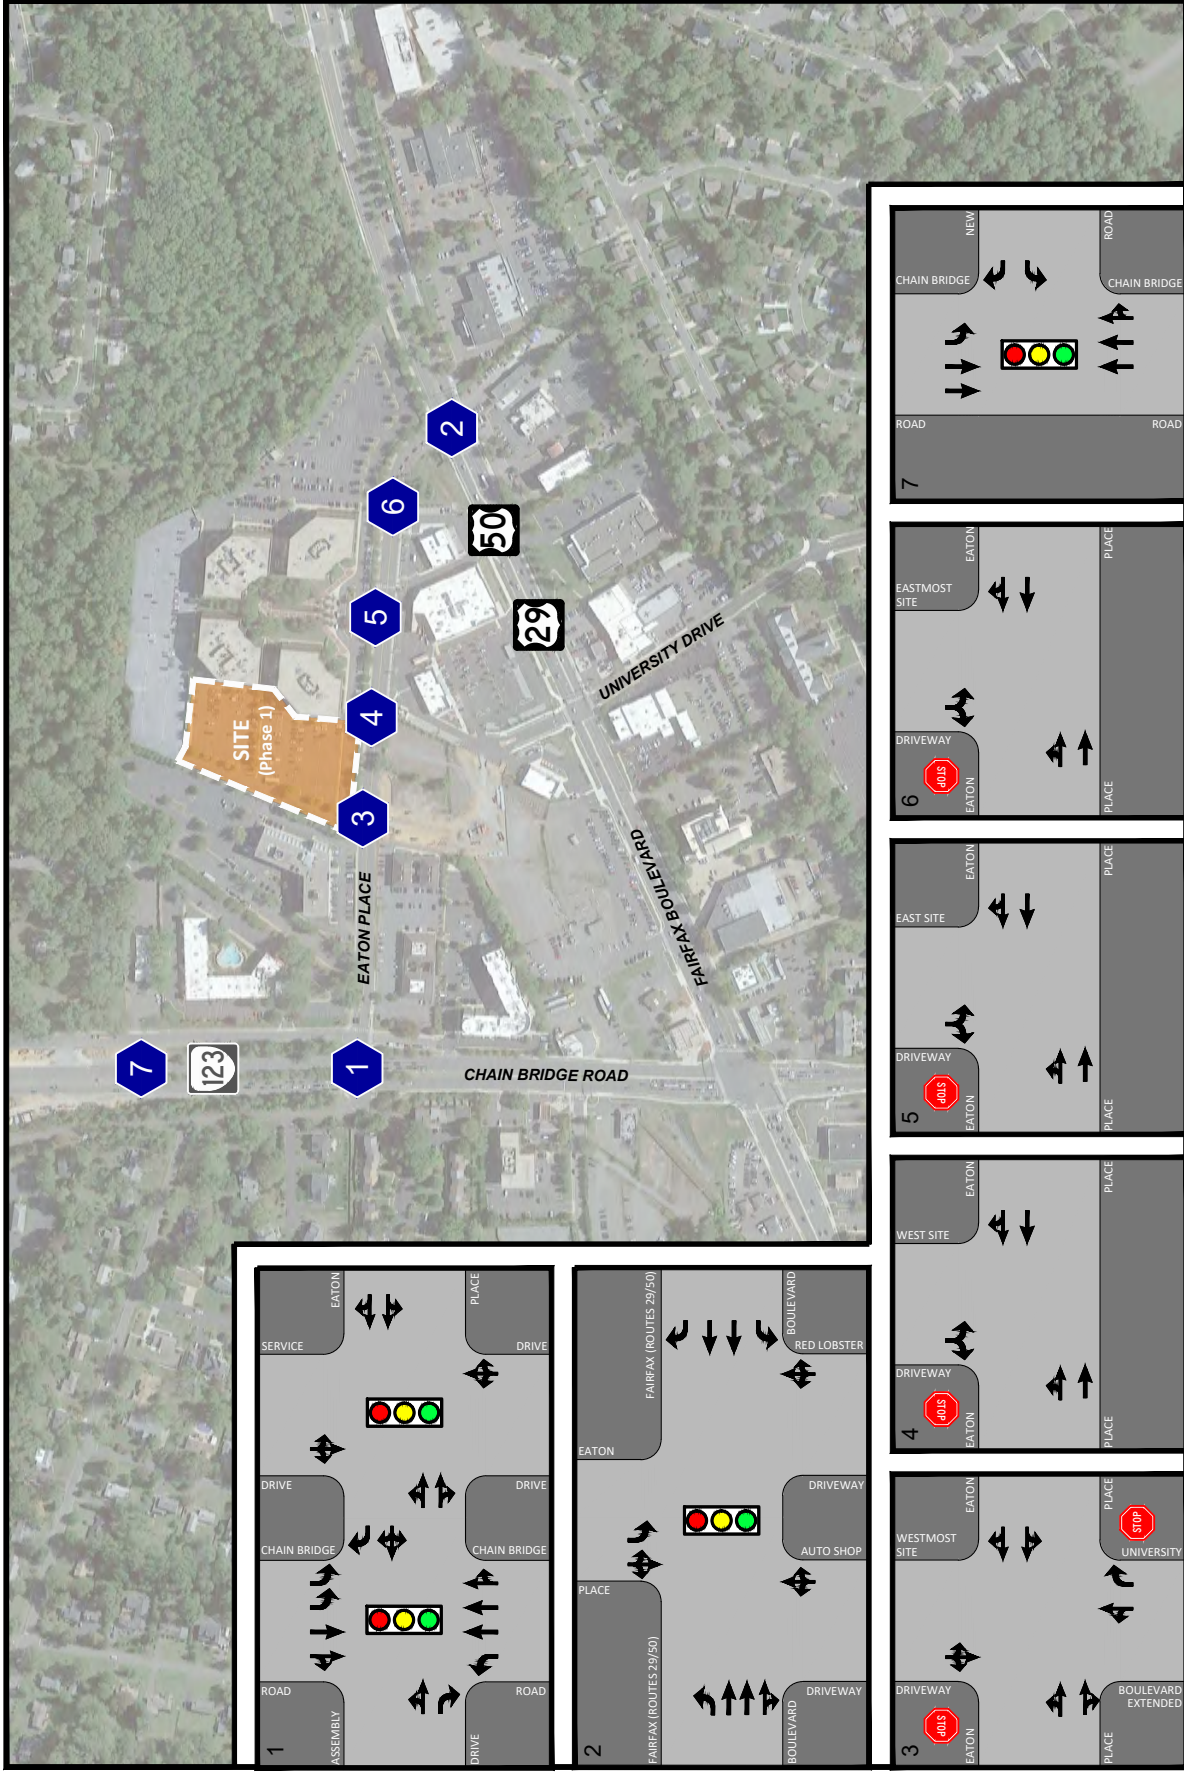


 NORTH
 N29 Willowwood
 City of Fairfax, Virginia

 Represents One Travel Lane
 Signalized Intersection
 Stop Sign

Figure 5-4
2026 Background Future Lane Use and Traffic Control

SECTION 6 SITE ANALYSIS

Overview

The number of new vehicle trips anticipated to be generated by the proposed development plan were forecasted and assigned to the surrounding roadway network. The generation, distribution, and assignment of site trips were based on the proposed development plan and existing site entrances in relation to the surrounding roadway network.

Proposed Site Access

The site plan provided on Figure 1-2 shows that access to the site would continue to be provided via four (4) driveways along Eaton Place. It is anticipated that the western driveways would serve the residential apartments and ground-floor retail. All site driveways would continue to provide full-movement access.

Trip Generation

Overview. Trip generation estimates for the AM and PM peak hours, as well as the average daily traffic, were derived from the standard Institute of Transportation Engineers (ITE) trip generation rates, as published in the Trip Generation, 11th edition manual. The “Multifamily Residential – Mid-Rise” (221) land use code was used for the proposed apartment units while the “Retail Plaza” (822) land use code was used for the commercial component.

The trip generation analysis for the proposed Phase 1 uses is presented in Table 6-1 and indicates that the site would generate 119 AM peak hour trips (34 in and 85 out), 142 PM peak hour trips (82 in and 60 out), and 1,503 daily (24-hour) trips when fully built and occupied in 2026. It is noted that the subject rezoning application only applies to Phase 1 and future phases are not being considered at this time

In the interest of conservatism, no reduction in site generated trips due to transit mode split was taken in this analysis. However, it is anticipated that the project would take advantage of public transit opportunities available within the immediate proximity of the site.

It is noted that based on the Applicant’s proffers, up to 3,020 sq. ft. of retail could be converted to up to three (3) loft-style apartment units. Under such a scenario, the projected trip generation would be slightly lower than the trip generation estimates described above. Therefore, for purposes of the traffic analysis, the more conservative development consisting of 260 multifamily residential units and 5,000 S.F. of retail was assumed.

Site Trip Distribution

As agreed upon in the scope with City staff, site trip distribution used in the analysis was based on existing travel patterns and engineering judgment. For purposes of this analysis, the following distribution was used in the forecasting of future site traffic:

To/From:	Residential/Commercial
North on Chain Bridge Road:	40 percent
East on Fairfax Boulevard:	30 percent
South on Chain Bridge Road:	10 percent
West on Fairfax Boulevard:	<u>20 percent</u>
TOTAL	100 percent

Site Trip Assignments


The vehicle trip distribution and assignments of the total vehicle trips generated upon the future buildout of the N29 Willowwood – Phase 1 development was based on the above distribution and are depicted on Figure 6-1.

Table 6-1
 N29 Willowood
 Site Trip Generation Summary (1)

Land Use	Size	Units	ITE Code	Weekday AM Peak Hour		Weekday PM Peak Hour		Weekday ADT	
				In	Out	In	Out		Total
Proposed Uses - Phase 1									
Multifamily Residential (Mid-Rise)	260	D.U.	221	24	79	103	40	102	1,194
<i>Internal with Retail (5% AM, 10% PM, 15% Daily)</i>				-	1	1	2	4	66
New Residential External Trips				24	78	102	38	98	1,128
Retail Plaza	5,000	S.F.	822	11	7	18	24	48	441
<i>Internal with Residential (5% AM, 10% PM, 15% Daily)</i>				1	-	1	2	4	66
New External Retail Trips				10	7	17	22	44	375
Total New Trips				34	85	119	60	142	1,503

Notes:

(1) Trip Generation based on ITE's Trip Generation, 11th Edition.

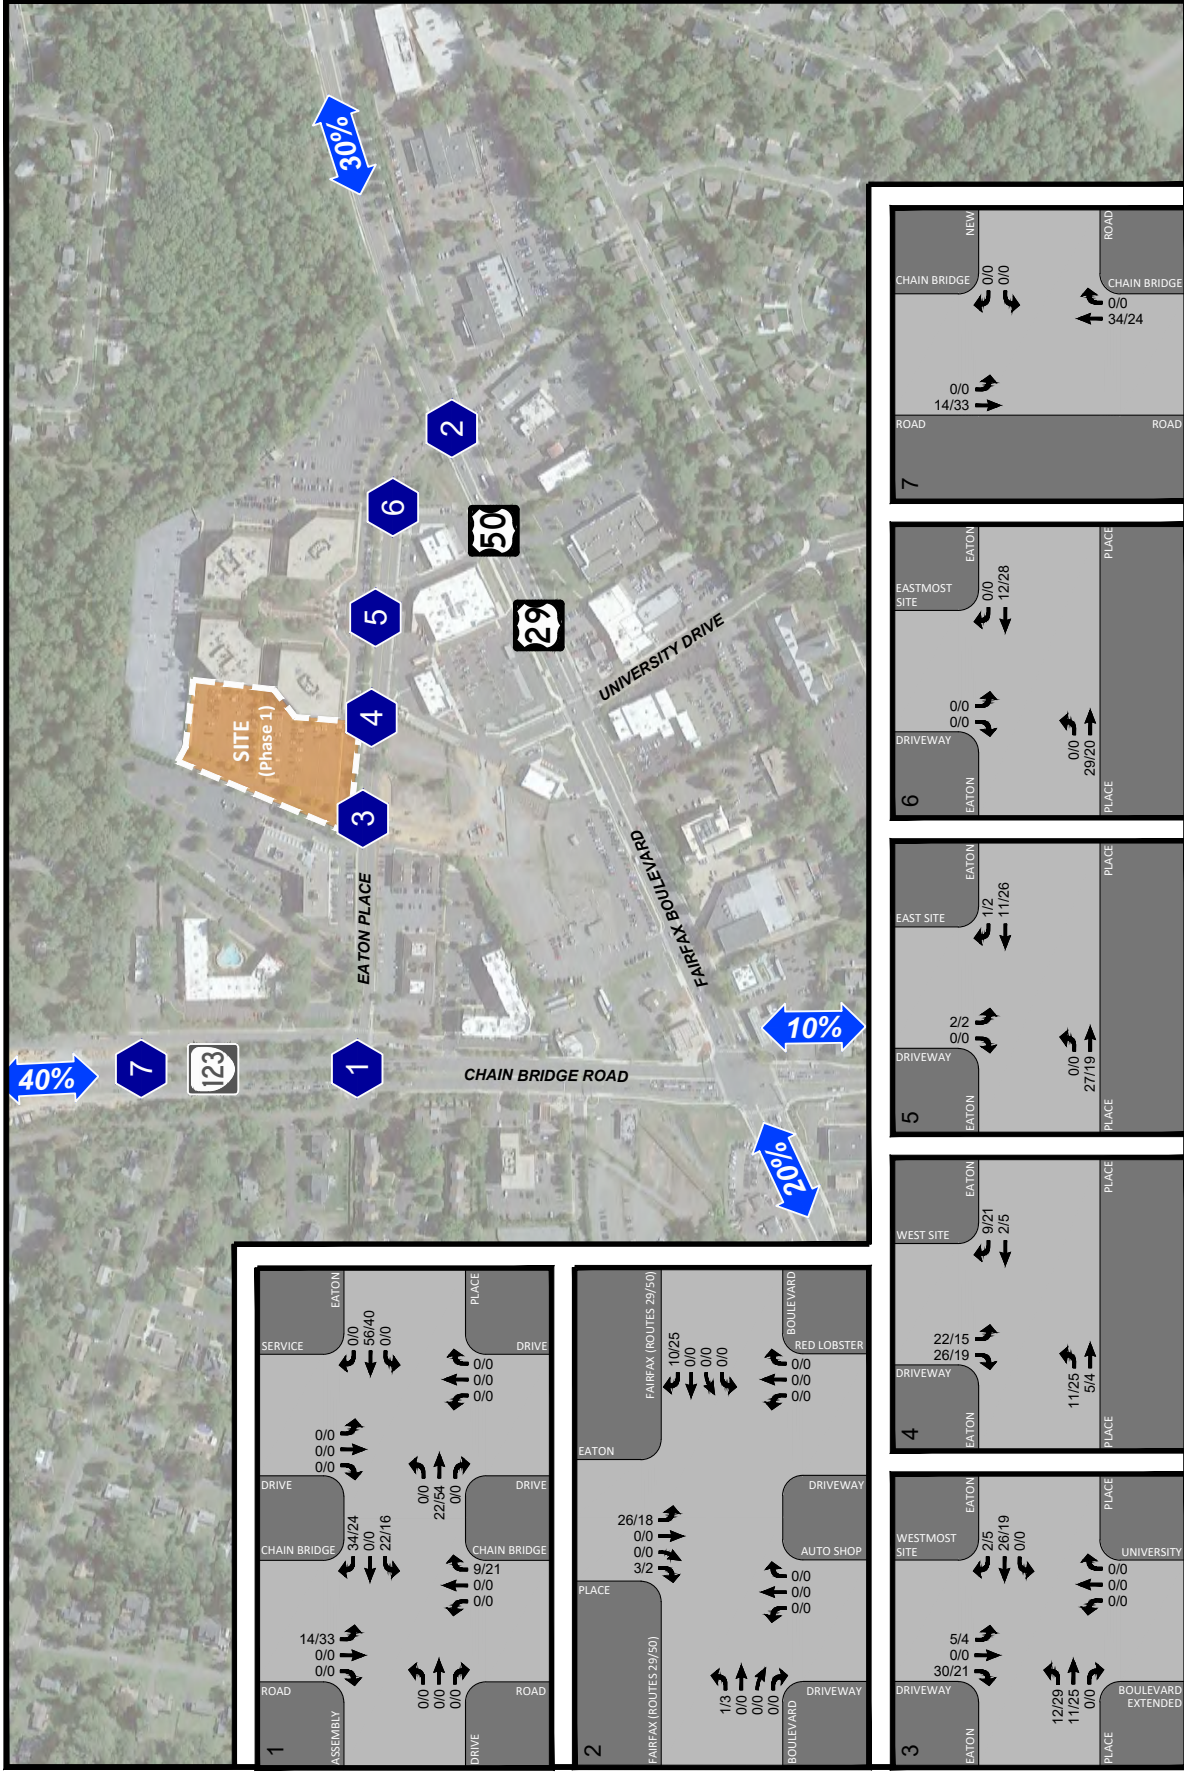

← NORTH
 N29 Willowwood
 City of Fairfax, Virginia

AM PEAK HOUR
 PM PEAK HOUR
 000 / 000

Figure 6-1
 Site Trip Assignments

SECTION 7

ANALYSIS OF FUTURE CONDITIONS WITH SITE DEVELOPMENT

Total Future Traffic Forecasts

Site trip assignments shown on Figure 6-1 were added to the background traffic forecasts to yield 2026 total future traffic forecasts, shown on Figure 7-1. Lane use and traffic control at each of the study intersections for 2026 total future conditions is shown on Figure 7-2.

Total Future Levels of Service with Proposed Development Plan

Future levels of service and queuing with the proposed Phase 1 development plan were determined at the study intersections based on the future traffic volumes and lane use and the 2000 HCM methodologies for signalized and unsignalized intersections calculated using the Synchro 11 traffic analysis software. The results of these analyses are provided in Appendix E and summarized in Tables 7-1 and 7-2.

Study intersections are anticipated to operate as follows:

1. The Chain Bridge Road (Route 123)/Eaton Place signalized intersection would continue to operate at level of service (LOS) “E” during the AM peak hour and LOS “D” during the PM peak hour with the installation of dual southbound left turn lanes. The adjacent service streets at Eaton Place would continue to operate at LOS “D” and LOS “F” during these periods.
2. The signalized Fairfax Boulevard (US Route 50)/Eaton Place intersection would operate at level of service (LOS) “C” during the AM peak hour and LOS “E” during the PM peak hour. The side-street approach of Eaton Place operates at LOS “F” during these periods.
3. All approaches at the unsignalized intersections serving the site on Eaton Place would continue to operate at acceptable levels of service (at LOS “C” or better) during both the AM and PM peak hours with the exception of the northbound approach of University Boulevard Extended that would operate at LOS “F” and “E” during the AM and PM peak hours, respectively. No additional roadway improvements are required at the site driveway intersections.
4. The planned signalized intersection to the north on Chain Bridge Road (Route 123) would continue to operate at overall level of service “B” or better. Consistent with background conditions, sidestreet and left-turning movements would experience higher delays to the corridor signal cycle lengths.

5. Queuing would be generally consistent with background conditions. At the site driveways, sidestreet queues would be four (4) vehicle lengths or less.

As shown in Table 7-1, levels of service under future site development conditions would remain generally consistent with future background conditions (i.e., without site development). The site-generated traffic would have a minor increase in delay at the key signalized intersections on Chain Bridge Road (Route 123) and Fairfax Boulevard (U.S. Route 29/50) of generally three (3) seconds during the AM peak hour and five (5) during the PM peak hour.

As previously noted, a “Road Diet” is recommended for Eaton Place to be modified from its existing four-lane undivided section to a three-lane road with a center left turn lane and bicycle lanes. The capacity results assuming this alternative geometry are shown in Table 7-1 and indicate that all approaches at the unsignalized intersections serving the site on Eaton Place would continue to operate at acceptable levels of service (at LOS “C” or better) during both the AM and PM peak hours with the exception of the northbound approach of University Boulevard Extended that would operate at LOS “F” and “E” during the AM and PM peak hours, respectively. Thus, this context-sensitive design would serve all modes and provide a left turn lane to improve and promote safe operations while maintaining adequate vehicular operations along Eaton Place.

Transportation Demand Management

The Applicant proposes to implement a number of Transportation Demand Management (TDM) measures for both the new N29 Apartments (Application Property) and the existing office building in the southwestern portion of the site. These measures will inform residents and employees of transit options and provide amenities to allow them to make trips without using a vehicle and reduce overall traffic impacts.

Details of the TDM strategies are outlined in the proffers, but may include the following elements:

- A. Designate a Transportation Management Coordinator (TMC) for the property. The TMC would implement the TDM program. The position may be part of other duties assigned to the property manager. Duties of the Transportation Management Coordinator would include the following:
 1. Assist residents and employees in making effective and efficient commuting choices.
 2. Disseminate bus, ridesharing, bicycle route maps, trail maps, and other relevant transit options to new residents.
 3. Solicit support from the Metropolitan Washington Council of Governments (MWCOG) Commuter Connections program, the Washington Metropolitan Area Transit Authority (WMATA), OmniRide, and others.
 4. Provide on-site assistance to residents and employees in forming and maintaining carpools and vanpools.

5. Disseminate park-and-ride lot information to prospective carpoolers.
6. Register carpool participants, transit users, bicyclists, and walkers in the Guaranteed Ride Home (GRH) program.
7. Encourage residents to ride bikes.
8. Market and promote the TDM Program among residents and employees through printed materials and web sites (if available).
9. Meet annually with the City's TDM program manager to evaluate and adjust strategies based on TDM surveys and other considerations.

B. Commuter Center

1. Designate a centralized space on-site (within one or more buildings) as a Commuter Center where TMC functions would take place.
2. Install an electronic display in the Application Property's leasing office that would provide information on the various aspects of the TDM Program.
3. Sell transit fare media, such as OmniRide bus passes, SmarTrip cards, Metro fare cards, and Metrobus passes.
4. Allow residents and employees to purchase transit fare media.

C. Incentives to use transit or alternatives to automobiles, including:

1. Provide information on OmniRide, Metrorail, Metrobus, Trail Access, and other public transportation facilities, services, routes, schedules, and fares.
2. Disseminate information to transit users regarding free guaranteed rides home in cases of emergency.
3. Provide convenient, comfortable, and attractive pedestrian connections on and off-site.
4. At the time of initial occupancy only for each dwelling unit on the Application Property, the Applicant shall provide one (1) resident of the unit with a one-time prepaid transit card (SmarTrip Card) with a value of twenty-five dollars (\$25.00).

D. Carpool programs, including:

1. Provide personalized assistance and ride-matching services among residents and employees through the Commuter Center and TMC.
2. Provide ride-matching assistance and services among the site's residents and employees and other area residents and employees through the Commuter Connections program of MWCOG.
3. Disseminate information to carpoolers regarding free guaranteed rides home in cases of emergency.

E. Parking management, including:

1. Assign parking management as one of the duties of the property manager. Parking management may include the assignment of parking spaces to residents within the parking garage and designation of guest parking as identified by signage.
2. Assign one (1) parking space per unit that will be offered with each unit for a fee. A premium may be charged for preferred and/or additional parking spaces.
3. Clearly designate guest and commercial parking throughout the site.
4. Provide secure bicycle parking for residents and employees.
5. Install at least one interior or exterior electric vehicle charging station on the Application Property.
6. Actively market to low- or no-car households.

F. Pedestrian and Bicycle Programming and Support, including:

1. Provide bicycle storage. Note that storage for 23 bicycles will be provided in the bike storage room within the central building.
2. Provide pedestrian connections to adjacent properties where available.

G. Monitoring Program

1. Applicant to provide City staff with information obtained by resident and employee surveys regarding use of public transportation, carpooling, bikes, teleworking, and any other transportation options on an annual basis.

H. Revisions to the TMP

1. Design the TMP to be flexible and responsive to future evaluations in prescribing the TDM strategies. The phasing of development and transportation infrastructure in the region requires that the TMP has flexibility to respond to the various challenges posed by changes in transit system capacity, transit fares, construction staging and traffic, fuel prices, regional transportation policies and projects, changes in travel behavior, telework and flexible work hours, and changes in surrounding developments.

Table 7-1
N29 Willowood
Total Future Intersection Levels of Service Summary (1) (2) (3) (4) (5)


Intersection	Intersection Control	Lane Group	2022 Baseline		2026 Background Future		2026 Total Future		
			AM	PM	AM	PM	AM	PM	
(1) Chain Bridge Road (Route 123)/ Eaton Place/	Signal	EBLTR	F (83.9)	F (144.7)	F (83.9)	F (126.0)	F (83.9)	F (122.6)	
		WBLT	A (5.2)	A (6.0)	A (3.0)	A (6.1)	A (2.5)	A (7.5)	
		WBR	A (0.7)	C (20.2)	A (0.7)	C (30.4)	A (1.7)	C (31.5)	
		NBL	F (95.0)	F (104.7)	F (92.7)	F (104.7)	F (92.7)	F (104.7)	
		NBTR	F (87.2)	E (57.6)	F (101.8)	E (56.7)	F (104.2)	E (59.9)	
		SBL	F (290.5)	F (89.4)	F (239.3)	F (89.7)	F (259.1)	F (130.9)	
		SBTR	D (41.7)	D (42.2)	D (50.2)	D (41.1)	D (50.2)	D (41.6)	
		Overall	F (95.3)	D (47.7)	F (93.9)	D (48.1)	F (96.5)	D (53.5)	
		With Proposed Changes to Southbound Approach (2 Left Lanes and 2 Thru Lanes)	EBLTR	-	-	F (83.9)	F (126.0)	F (83.8)	F (122.6)
			WBLT	-	-	A (3.0)	A (6.1)	A (2.5)	A (7.5)
			WBR	-	-	A (0.7)	C (30.4)	A (1.6)	C (31.5)
			NBL	-	-	F (92.7)	F (104.7)	F (92.7)	F (104.7)
			NBTR	-	-	F (94.5)	D (54.9)	F (99.5)	E (57.5)
			SBL	-	-	E (78.1)	F (101.2)	F (103.6)	F (103.6)
SBTR	-		-	E (58.9)	D (47.8)	E (58.8)	D (48.7)		
Overall	-	-	E (69.4)	D (50.8)	E (70.0)	D (52.5)			
Route 123 Service Drive/ Eaton Place/	Signal	EBLTR	A (3.4)	A (3.7)	A (3.8)	A (3.4)	A (3.9)	A (3.2)	
		WBLTR	F (80.8)	F (235.4)	F (83.0)	F (244.2)	F (82.9)	F (272.2)	
		NBLTR	F (90.0)	F (105.0)	F (90.0)	F (105.2)	F (90.0)	F (105.1)	
		SBLTR	F (191.8)	F (332.7)	F (96.6)	F (125.0)	F (123.8)	F (126.9)	
		Overall	D (51.8)	F (166.3)	D (35.5)	F (155.8)	D (40.4)	F (168.3)	
(2) Fairfax Boulevard (U.S. Route 29/50)/ Eaton Place/Private Driveways	Signal	EBL	B (14.5)	C (31.0)	B (15.5)	D (38.7)	B (17.2)	D (40.1)	
		EBTR	C (20.6)	C (20.9)	C (21.7)	C (21.5)	C (23.5)	C (21.4)	
		WBL	B (16.1)	B (15.1)	B (17.2)	B (15.5)	B (18.8)	B (15.9)	
		WBT	C (23.2)	C (33.5)	C (24.5)	D (37.0)	C (26.8)	C (38.0)	
		WBR	B (19.8)	C (20.2)	C (20.7)	C (20.5)	C (22.7)	C (21.9)	
		NBLTR	F (93.6)	F (106.7)	F (93.6)	F (106.7)	F (93.6)	F (106.7)	
		NELTR	F (95.1)	F (107.3)	F (95.1)	F (107.3)	F (95.1)	F (107.3)	
		SBL	F (108.8)	F (220.3)	F (107.2)	F (227.5)	F (103.8)	F (252.0)	
		SBLTR	F (107.9)	F (213.0)	F (106.2)	F (218.5)	F (104.1)	F (245.2)	
		Overall	C (30.3)	D (54.9)	C (31.0)	E (56.5)	C (33.5)	E (61.8)	
		(3) Eaton Place/ Westmost Driveway/ University Drive Extended	Stop Sign	EBLT	A [6.0]	A [2.2]	A [6.0]	A [2.2]	A [6.3]
WBLT	A [0.2]			A [0.3]	A [0.2]	A [0.3]	A [0.2]	A [0.3]	
NBLT	E [47.1]			E [35.4]	E [49.0]	E [36.5]	F [61.9]	E [48.6]	
NBR	A [8.9]			A [8.9]	A [8.9]	A [9.0]	A [8.9]	A [8.9]	
SBLTR	B [12.5]			C [18.1]	B [12.7]	C [18.5]	C [15.4]	C [22.3]	
3-Lane Cross-Section	Stop Sign		EBL	-	-	-	-	A [9.2]	A [9.3]
	WBL		-	-	-	-	A [9.0]	A [8.4]	
	NBLT		-	-	-	-	E [39.3]	F [58.6]	
	NBR		-	-	-	-	B [12.3]	B [10.9]	
	SBLTR		-	-	-	-	C [16.5]	D [26.8]	
(4) Eaton Place/ West Driveway	Stop Sign	EBLT	A [2.1]	A [0.9]	A [2.0]	A [0.9]	A [2.4]	A [2.3]	
		SBLR	B [11.6]	C [16.3]	B [11.5]	C [16.4]	B [12.7]	C [19.6]	
	3-Lane Cross-Section	Stop Sign	EBL	-	-	-	-	A [8.3]	A [9.0]
		SBLR	-	-	-	-	B [12.9]	C [16.9]	
(5) Eaton Place/ Middle Driveway	Stop Sign	EBLT	A [2.2]	A [0.6]	A [2.2]	A [0.6]	A [2.1]	A [0.6]	
		SBLR	B [12.9]	B [14.3]	B [13.0]	B [14.5]	B [13.7]	C [15.3]	
	3-Lane Cross-Section	Stop Sign	EBL	-	-	-	-	A [8.3]	A [8.8]
		SBLR	-	-	-	-	B [12.4]	B [13.9]	
(6) Eaton Place/ East Driveway	Stop Sign	EBLT	A [3.6]	A [0.7]	A [3.6]	A [0.7]	A [3.6]	A [1.2]	
		SBLR	B [13.8]	C [18.0]	B [14.0]	C [18.4]	C [16.4]	C [22.2]	
	3-Lane Cross-Section	Stop Sign	EBL	-	-	-	-	A [8.8]	A [8.6]
		SBLR	-	-	-	-	B [13.6]	C [18.5]	
(7) Chain Bridge Road (Route 123)/ New Road	Signal	WBL	-	-	F (84.4)	F (99.5)	F (84.4)	F (99.5)	
		WBR	-	-	F (84.5)	F (99.6)	F (84.5)	F (99.6)	
		NBTR	-	-	C (30.2)	A (3.2)	C (30.2)	A (3.2)	
		SBL	-	-	F (96.8)	F (109.1)	F (96.8)	F (109.1)	
		SBT	-	-	A (4.1)	A (3.6)	A (4.1)	A (3.6)	
		Overall	-	-	B (19.1)	A (8.2)	B (19.1)	A (8.2)	

Notes:
(1) Analysis performed using Synchro software, version 110
(2) Values in parentheses, (), represent signalized delay in seconds
(3) Values in brackets, [], represent unsignalized delay in seconds
(4) * - Delay exceeds 999 seconds
(5) Roadway names in bold are considered north/south for purposes of this analysis.

Table 7-2
N29 Willowood
Total Future Intersection Queuing Summary (1) (2) (3) (4) (5)

Intersection	Lane Group	Available Storage (ft)	2022 Baseline						2026 Background Future						2026 Total Future								
			AM		PM		PM		AM		95th %		50th %		AM		95th %		50th %		PM		
			50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %	50th %	95th %	
(1) Chain Bridge Road (Route 123)/ Eston Place/ 3-Lane Cross-Section	EBLTR	-	180	269	156	#288	180	269	156	#288	180	269	156	#288	180	269	156	#288	180	269	156	#288	
	WBLT	-	17	m28	90	m12	7	m0	104	0	m0	7	m11	130	0	m0	130	0	m0	130	0	m0	
	WBR	-	1	m0	93	m0	0	m0	93	0	m0	0	m1	130	0	m0	130	0	m0	130	0	m0	
	NBL	190	520	479	#694	479	#597	479	#694	479	#597	479	#694	479	#597	479	#694	479	#597	479	#694	479	#597
With Proposed Changes to Southbound Approach (2 Left Lanes and 2 Thru Lanes)	EBLTR	-	288	390	391	446	361	465	368	397	361	465	368	397	361	465	368	397	361	465	368	397	
	WBLT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	WBR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	NBL	190	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Route 123 Service Drive/ Eston Place/ 3-Lane Cross-Section	EBLTR	-	30	m31	23	m24	36	m31	21	m24	36	m31	21	m24	36	m31	21	m24	36	m31	21	m24	
	WBLT	-	190	265	#888	197	274	#891	226	322	234	322	226	322	234	322	226	322	234	322	226	322	
	NBLT	-	6	26	61	32	6	32	61	32	6	32	61	32	6	32	61	32	6	32	61	32	
	SBLTR	-	-278	#486	-308	135	135	#531	101	101	135	135	#531	101	101	135	135	#531	101	101	135	135	
(2) Fairfax Boulevard (U.S. Route 29/50)/ Eston Place/Private Driveways	EBL	260	27	85	19	39	28	88	19	42	28	88	19	42	28	88	19	42	28	88	19	42	
	EBTR	-	256	635	395	465	278	689	437	512	297	704	437	512	297	704	437	512	297	704	437	512	
	WBL	140	3	16	7	19	3	16	17	19	3	16	17	19	3	16	17	19	3	16	17	19	
	WBR	-	295	593	1021	1226	316	641	1174	1408	334	656	1140	1408	334	656	1140	1408	334	656	1140	1408	
(3) Eston Place/ Westmost Driveway	EBLTR	-	5	18	26	59	5	18	26	59	5	18	26	59	5	18	26	59	5	18	26	59	
	NBLTR	-	242	m303	-561	244	m314	244	m314	244	m314	244	m314	244	m314	244	m314	244	m314	244	m314	244	m314
	SBLT	-	236	m292	-526	238	m308	238	m308	238	m308	238	m308	238	m308	238	m308	238	m308	238	m308	238	m308
	NBLTR	-	7	26	26	59	7	26	26	59	7	26	26	59	7	26	26	59	7	26	26	59	
(4) Eston Place/ West Driveway	EBLTR	-	-	26	-	4	-	26	-	4	-	26	-	4	-	26	-	4	-	26	-	4	
	WBLT	-	0	0	1	0	0	0	1	0	0	0	1	0	0	0	1	0	0	0	1	0	
	NBLT	-	9	10	1	10	10	10	1	1	10	10	1	1	10	10	1	1	10	10	1	1	
	SBLTR	-	6	63	6	63	6	63	6	63	6	63	6	63	6	63	6	63	6	63	6	63	
(5) Eston Place/ Middle Driveway	EBLTR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	SBLR	-	3	2	1	9	3	2	1	9	3	2	1	9	3	2	1	9	3	2	1	9	
	EBL	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	SBLR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
(6) Eston Place/ East Driveway	EBLTR	-	-	6	-	1	-	6	-	1	-	6	-	1	-	6	-	1	-	6	-	1	
	SBLR	-	6	6	59	6	6	6	6	60	6	6	6	6	6	6	6	6	6	6	6	6	
	EBL	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	SBLR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
(7) Chain Bridge Road (Route 123)/ New Road	WBLR	-	-	-	-	-	4	15	7	24	4	15	7	24	4	15	7	24	4	15	7	24	
	NBLR	-	-	-	-	-	559	m568	10	546	575	m584	12	564	575	m584	12	564	575	m584	12	564	
	SBL	200	-	-	-	-	59	109	84	142	109	142	84	142	109	142	84	142	109	142	84	142	
	SBLT	-	-	-	-	-	172	417	159	380	174	424	173	415	174	424	173	415	174	424	173	415	

Notes:
 (1) Analysis performed using Synchro software, version 11.
 (2) - - - 50th percentile volume exceeds capacity, queue may be longer.
 (3) - - - 95th percentile volume exceeds capacity, queue may be longer.
 (4) - - - Volume for 95th percentile queue is indicated by yellow shading.
 (5) Roadway names in bold are considered priority roads for purposes of this analysis.

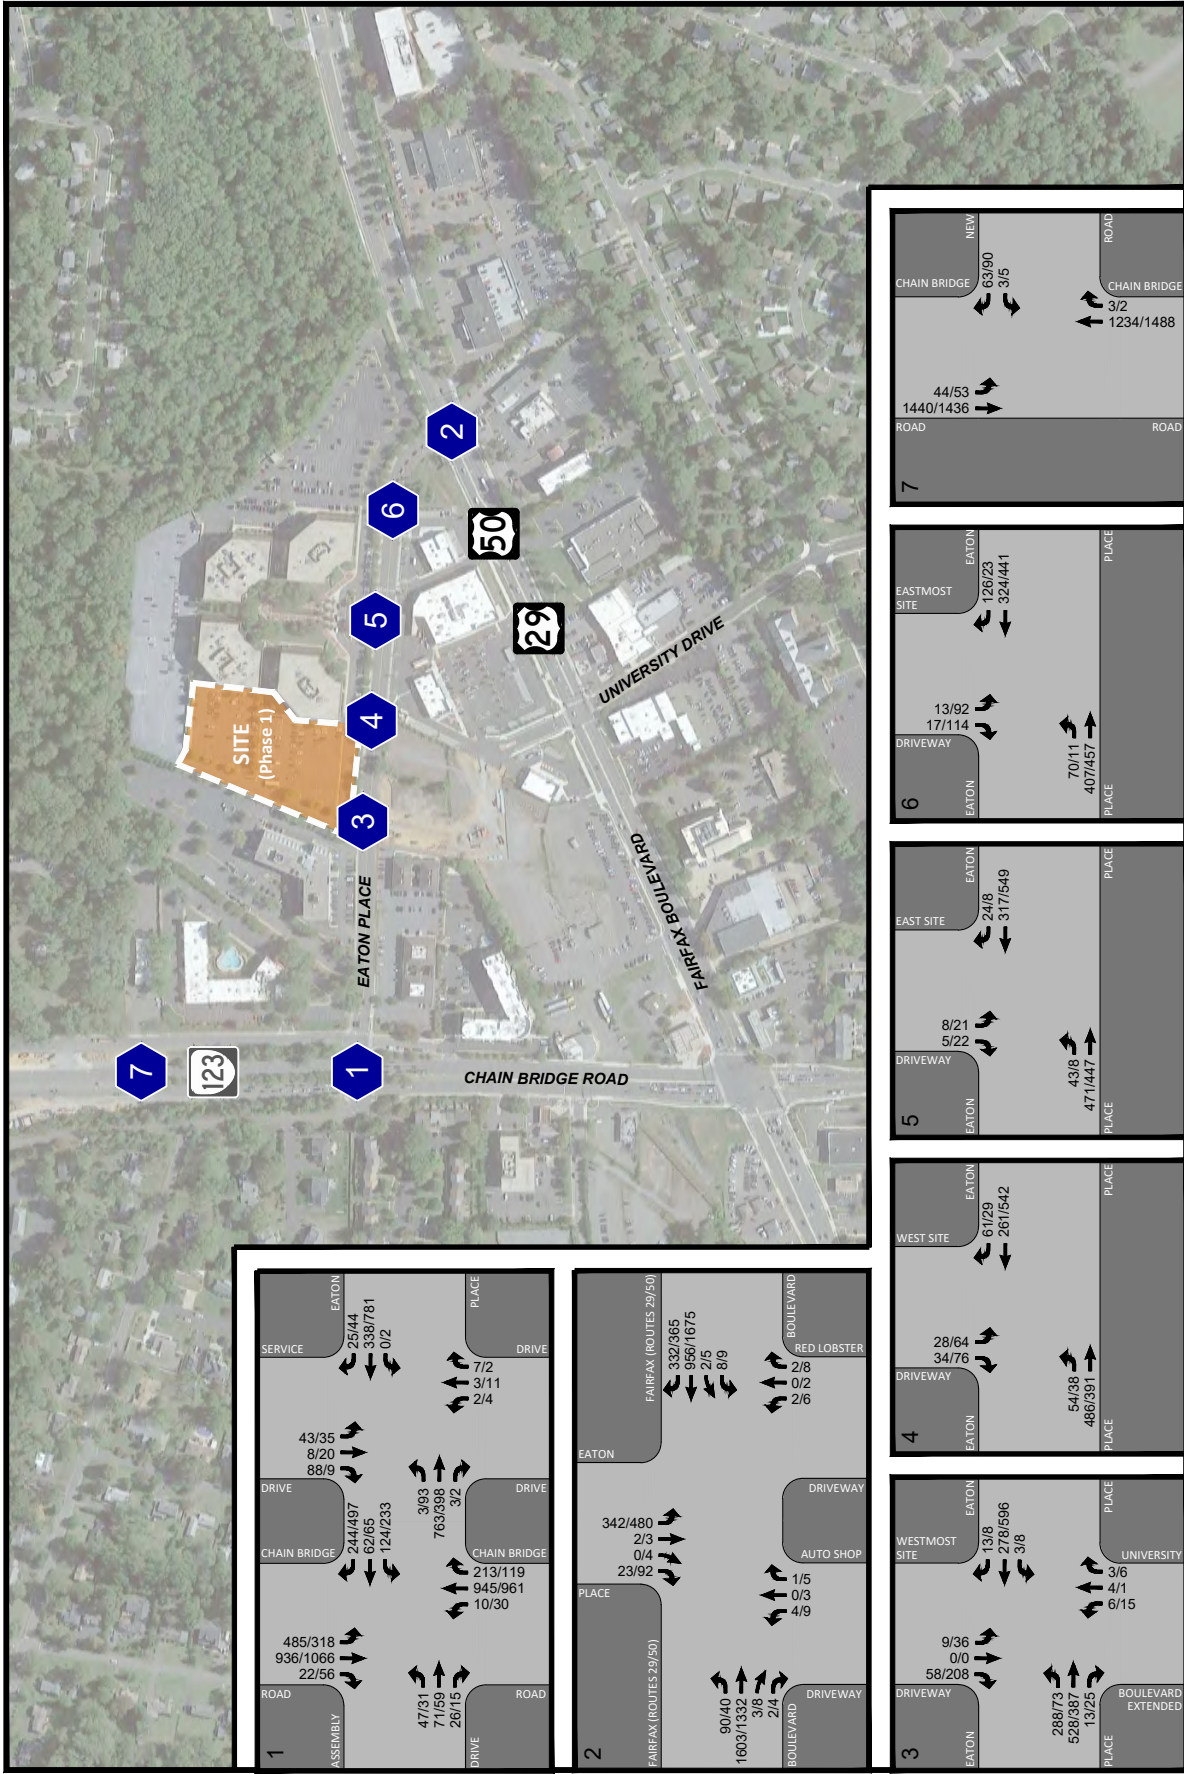

← NORTH
N29 Willowwood
City of Fairfax, Virginia

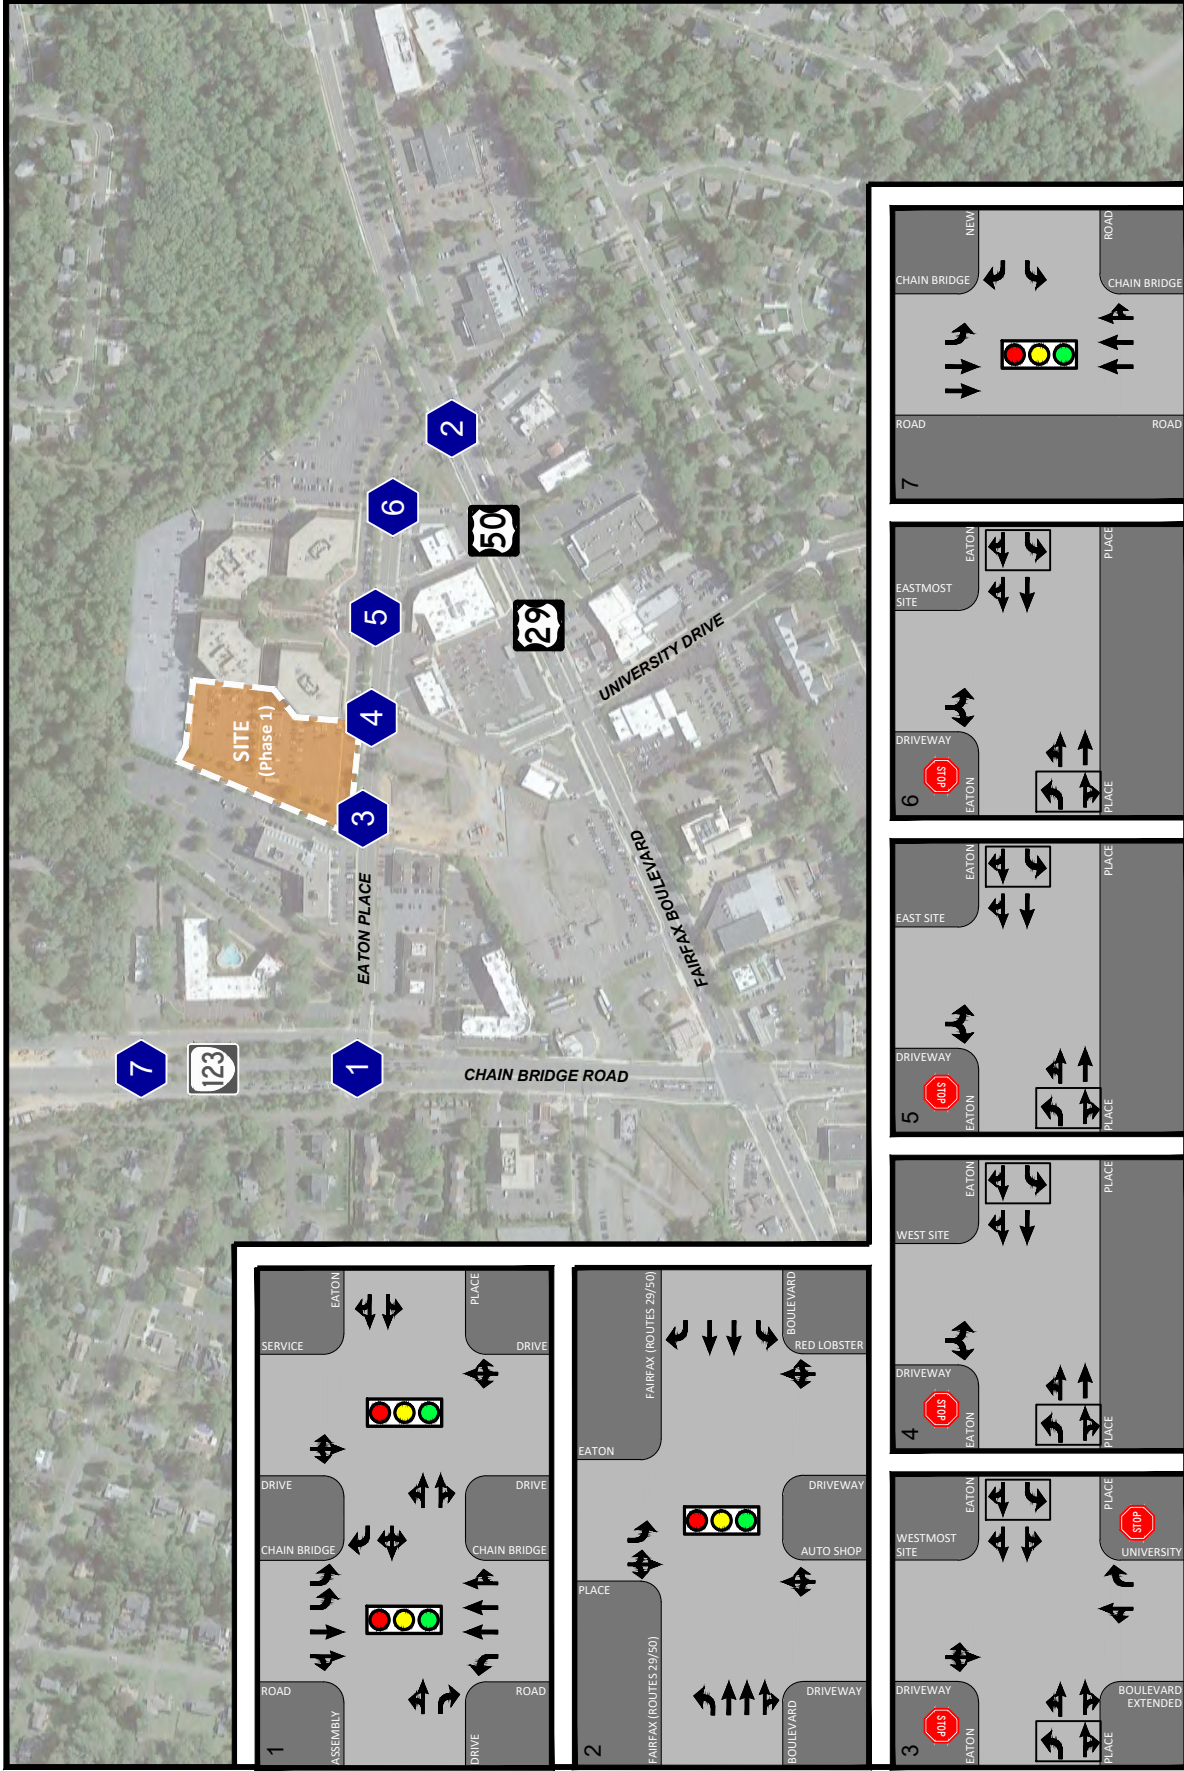


Figure 7-2
2026 Total Future Lane Use and Traffic Control



 NORTH
 N29 Willowwood
 City of Fairfax, Virginia

SECTION 8 CONCLUSIONS

The following summarizes the conclusions of this traffic impact study:

1. The Chain Bridge Road (Route 123)/Eaton Place signalized intersection currently operates beyond capacity (LOS “F”) during the AM peak hour while the adjacent service streets at Eaton Place operate beyond capacity (LOS “F”) during the PM peak hour. Other signalized intersections operate at overall acceptable levels of service (LOS “D” or better) with some lane groups operating beyond capacity.
2. The Breezeway Property, Northfax West Development, and Paul VI Redevelopment approved pipeline developments are anticipated to generate 307 AM commuter peak hour trips and 617 PM commuter peak hour trips at full buildout.
3. Under future 2026 traffic conditions, minimal increases in delay at the study intersections are expected due to the trips generated by approved pipeline developments in the vicinity of the site and overall levels of service would remain generally consistent with existing conditions.
4. The Applicant proposes to develop portions of the existing surface parking areas serving the existing office uses with 260 multifamily apartments with 5,000 S.F. of ground-floor retail. A structured parking garage will be constructed to serve the existing and proposed uses. Vehicular access would be provided via the existing four (4) site driveways on Eaton Place.
5. The project (Phase 1) is estimated to generate 119 AM peak commuter hour trips and 142 PM peak commuter hour trips upon buildout. It is expected to generate 1,503 average daily (24-hour) vehicle trips. It is noted that the subject rezoning application only applies to Phase 1 and future phases are not being considered at this time.
6. Under future 2026 traffic conditions, with the development of Phase 1 of the subject site, intersection levels of service would remain generally consistent with existing and background conditions. The analyses show that the Chain Bridge Road (Route 123)/Eaton Place/Service Drive signalized intersections would operate near or beyond capacity during the commuter peak periods.
7. All unsignalized intersection and access drive approaches serving Willowwood Plaza will operate at LOS “C” or better during each of the studied peak periods with the exception of the northbound approach of University Boulevard Extended. No additional roadway improvements are required at the site driveways under future conditions.
8. An alternative design for Eaton Place that would provide a three-lane road with a center left turn lane and bicycle lanes could be implemented while maintaining adequate vehicular operations along Eaton Place. This context-sensitive design would serve all modes and provide a left turn lane to improve and promote safe operations.

APPENDIX A

City of Fairfax Scoping Agreement





SCOPE OF WORK MEETING FORM

Information on the Project

Traffic Impact Analysis Base Assumptions

N29 WILLOWWOOD
CITY OF FAIRFAX, VIRGINIA
November 14, 2022

Contact Information			
Consultant Name: Tele: E-mail:	John F. Cavan, P.E., PTOE, - Wells + Associates, Inc. 703.676.3611 jfcavan@wellsandassociates.com		
Developer/Owner Name: Tele: E-mail:	Chris Love - Capital City Real Estate 202.255.9289 chris@capcityre.com		
Project Information			
Project Name:	N29 Apartments (Phase I) / N29 Residences (Phase II)	Locality/County:	City of Fairfax
Project Location: <small>(Attach regional and site specific location map)</small>	The site is located on the north side of Eaton Place between Chain Bridge Road (Route 123) and Fairfax Boulevard (US Route 50) and is currently occupied by office uses. See Figure 1 for the site location.		
Submission Type	Comp Plan <input type="checkbox"/>	Rezoning <input checked="" type="checkbox"/>	Site Plan <input type="checkbox"/> Subd Plat <input type="checkbox"/>
Project Description: <small>(Including details on the land use, acreage, phasing, access location, etc. Attach additional sheet if necessary)</small>	The Applicant is proposing to construct residential uses on the southwest and southeast portions of the site. Specifically, Phase 1 would consist of 282 multifamily units on the southwest of the site while Phase 2 would consist of 64 two-over-two townhomes. In addition, there will be approximately 2,000 SF of retail uses in Phase 1. Both phases are anticipated to be completed within one year of each other and only one buildout condition will be analyzed. The existing office uses would remain, and a portion of the parking would be shared between the residential and office uses. The Site Layout is provided as Figure 2 .		
Proposed Use(s): <small>(Check all that apply; attach additional pages as necessary)</small>	Residential <input type="checkbox"/>	Commercial <input type="checkbox"/>	Mixed Use <input checked="" type="checkbox"/> Other <input type="checkbox"/>
(See Table 1)	Existing Uses(s) Number of Units: _____ ITE LU Code(s): _____ Proposed Uses(s) Number of Multi-Family Units: <u>282 DU</u> ITE LU Code(s): <u>221</u> Number of 2-over-2 Condo Units: <u>64 DU</u>	Other Use(s) Retail <u>2,000 SF</u> ITE LU Code(s): <u>822</u> Independent Variable(s): _____ _____ _____	

	ITE LU Code(s): <u>220</u>			
Total Peak Hour Trip Projection:	Less than 100 <input type="checkbox"/>	100 – 499 <input checked="" type="checkbox"/>	500 – 999 <input type="checkbox"/>	1,000 or more <input type="checkbox"/>
Traffic Impact Analysis Assumptions				
Study Period	Existing Year: 2022	Build-out Year: 2026	Design Year: n/a	
Study Area Boundaries	North: Eaton Place		South: Fairfax Boulevard (US Route 50)	
	East: Eaton Place		West: Chain Bridge Road (Route 123)	
External Factors That Could Affect Project (Planned road improvements, other nearby developments)	<u>Pipeline Developments:</u> Paul VI Redevelopment Breezeway Property Northfax West Development			
Consistency With Comprehensive Plan (Land use, transportation plan)	The City's 2035 Comprehensive Plan identifies the site as part of the Northfax Activity Center. The Small Area Plan recommends a mix of office, retail, and multifamily residential uses on the site.			
Available Traffic Data (Historical, forecasts)	VDOT historical traffic count data indicates: <u>2020 VDOT Average Annual Daily Traffic (AADT):</u> US Route 29/50: 27,000; Route 123: 31,000 <u>2019 VDOT Average Annual Daily Traffic (AADT):</u> US Route 29/50: 37,000; Route 123: 39,000 <u>2018 VDOT Average Annual Daily Traffic (AADT):</u> US Route 29/50: 37,000; Route 123: 38,000 <u>2017 VDOT Average Annual Daily Traffic (AADT):</u> US Route 29/50: 37,000; Route 123: 39,000 <u>2016 VDOT Average Annual Daily Traffic (AADT):</u> US Route 29/50: 40,000; Route 123: 38,000			
Trip Distribution (See Figure 1)	From the East (US Route 29/50): 30%		From the North (Route 123): 40%	
	From the West (US Route 29/50): 20%		From the South (Route 123/University): 10%	
Annual Vehicle Trip Growth Rate:	0.5% or per VDOT AADT counts	Peak Period for Study (check all that apply)	<input checked="" type="checkbox"/> AM <input checked="" type="checkbox"/> PM <input type="checkbox"/> SAT	
		Peak Hour of the Generator	N/A	
Study Intersections and/or Road Segments	1. Chain Bridge Road (Route 123)/Eaton Place/Service Roads		2. Fairfax Boulevard (Route 29/50)/Eaton Place	

(See Figure 1)	3-6. Eaton Place/Site Driveways	7. Chain Bridge Road (Route 123)/Future North Connector
Trip Adjustment Factors	Internal allowance: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Reduction: <u>5 to 15%</u> trips	Pass-by allowance: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No Reduction: n/a % trips
Software Methodology	<input checked="" type="checkbox"/> Synchro <input type="checkbox"/> HCS (v.2000/+) <input type="checkbox"/> aaSIDRA <input type="checkbox"/> CORSIM <input type="checkbox"/> Other <u>Synchro Version 10</u>	
Traffic Signal Proposed or Affected (Analysis software to be used, progression speed, cycle length)	<ol style="list-style-type: none"> 1. Chain Bridge Road (Route 123)/Eaton Place/Service Roads 2. Fairfax Boulevard (Route 29/50)/Eaton Place 3. Chain Bridge Road (Route 123)/Future North Connector 	
Improvement(s) Assumed or to be Considered	Potential modification to Eaton Place from a four-lane undivided road to a three (3) lane roadway with a center left turn lane and bicycle lanes	
Background Traffic Studies Considered	Paul VI Redevelopment TIA Breezeway Property TIA Northfax West TIA	
Plan Submission	<input type="checkbox"/> Master Development Plan (MDP) <input checked="" type="checkbox"/> Generalized Development Plan (GDP) <input type="checkbox"/> Preliminary/Sketch Plan <input type="checkbox"/> Other Plan type (Final Site, Subd. Plan)	
Additional Issues to be Addressed	<input checked="" type="checkbox"/> Queuing analysis <input type="checkbox"/> Actuation/Coordination <input type="checkbox"/> Weaving analysis <input type="checkbox"/> Merge analysis <input checked="" type="checkbox"/> Bike/Ped Accommodations <input type="checkbox"/> Intersection(s) <input checked="" type="checkbox"/> TDM Measures <input type="checkbox"/> Other	

NOTES on ASSUMPTIONS:

1. Synchro 10 will be used to conduct capacity analysis with peak hour factors measured in the field for existing conditions ($0.85 < PHF$). Under background and total future conditions, a minimum PHF of 0.92 will be used for all movements.
2. Existing Synchro (signal timing) files to be provided by the city. Files submitted with the TIA will be saved to version 10.

SCOPE OF WORK MEETING

**ADDITIONS TO THE REQUIRED ELEMENTS, CHANGES TO THE METHODOLOGY OR
STANDARD ASSUMPTIONS, AND SIGNATURE PAGE**

Any additions to the Required Elements or changes to the Methodology or Standard Assumptions due to special circumstances that are approved by the City of Fairfax:



AGREED: _____ DATE: 11/14/2022
 Consultant

PRINT NAME: John F. Cavan, P.E., PTOE
 Consultant

SIGNED: _____ DATE: _____

PRINT NAME: _____

- Attachments:
Figure 1 – Site Location, Study Intersections, and Directional Distributions
Figure 2 – Site Layout
Table 1 – Trip Generation


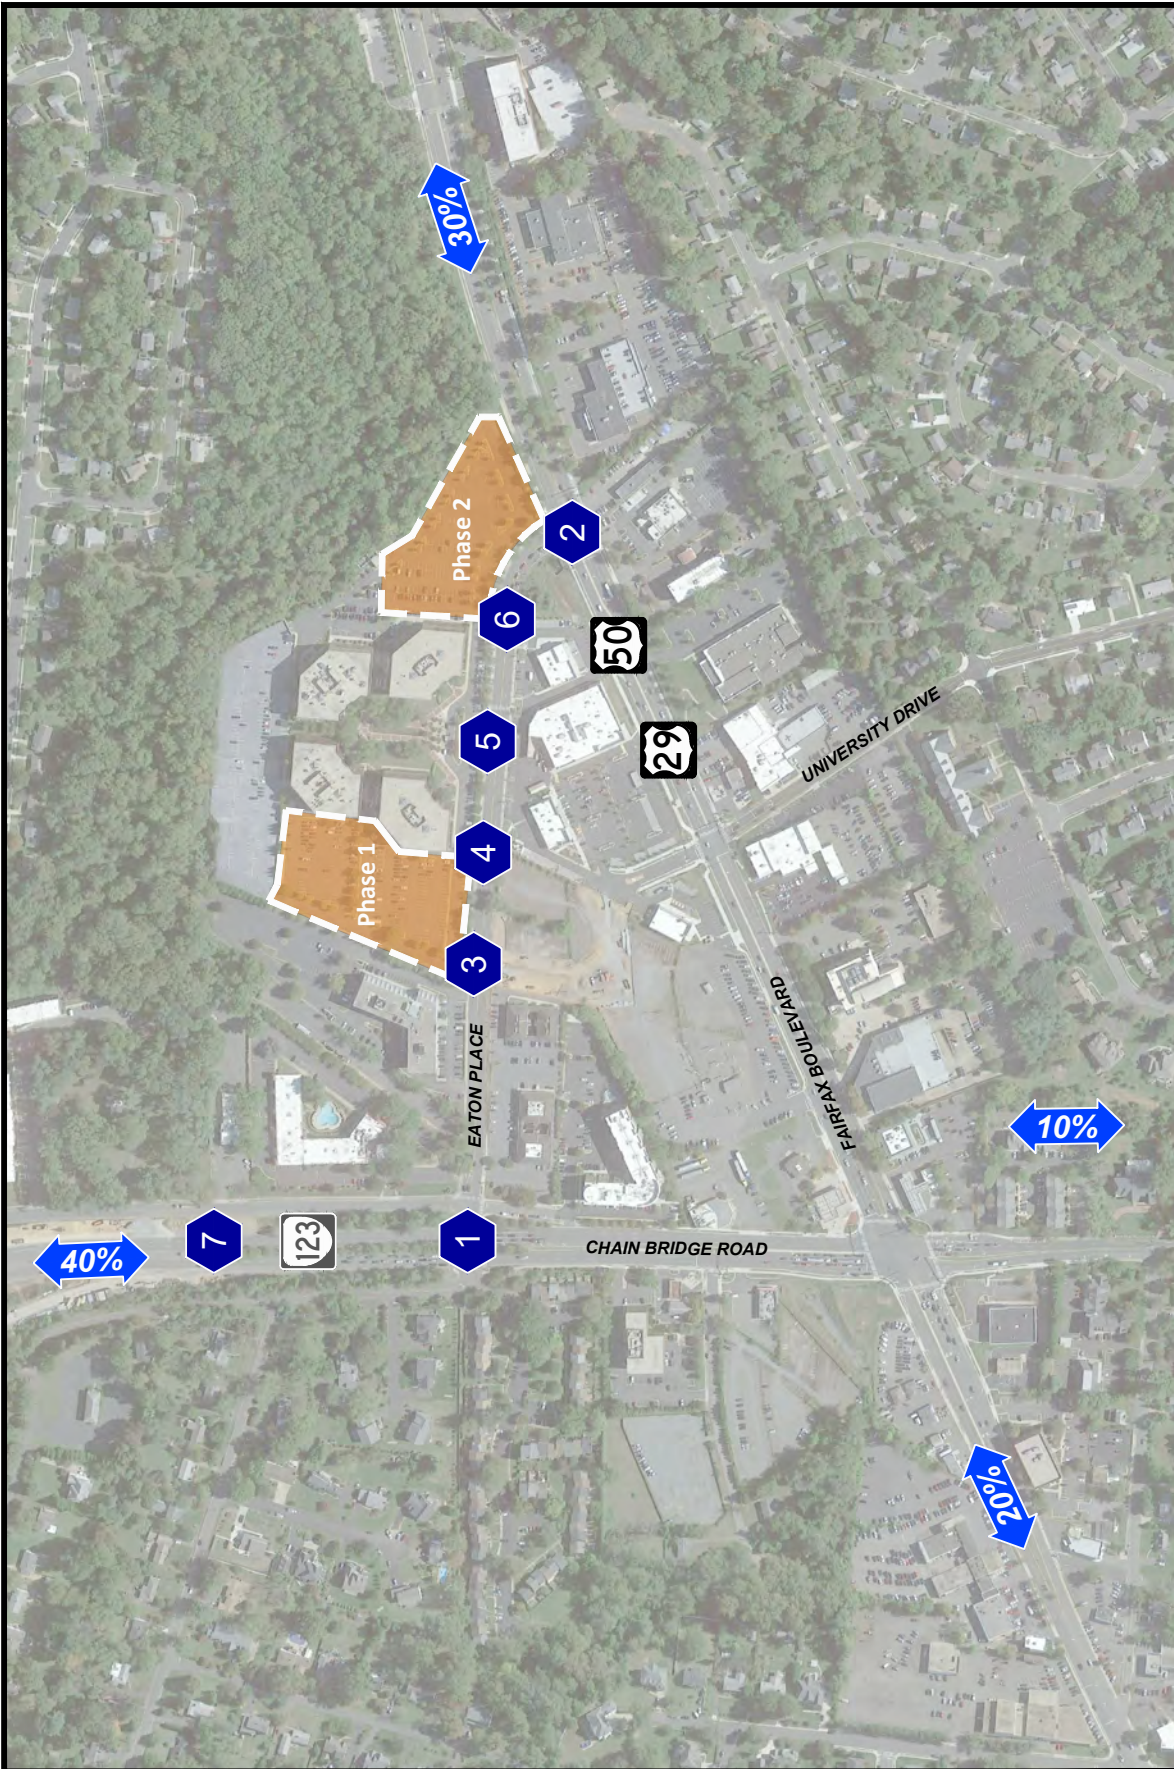


Figure 1
Site Location, Study Intersections, and Trip Distributions

 NORTH
Willowwood Plaza
City of Fairfax, Virginia



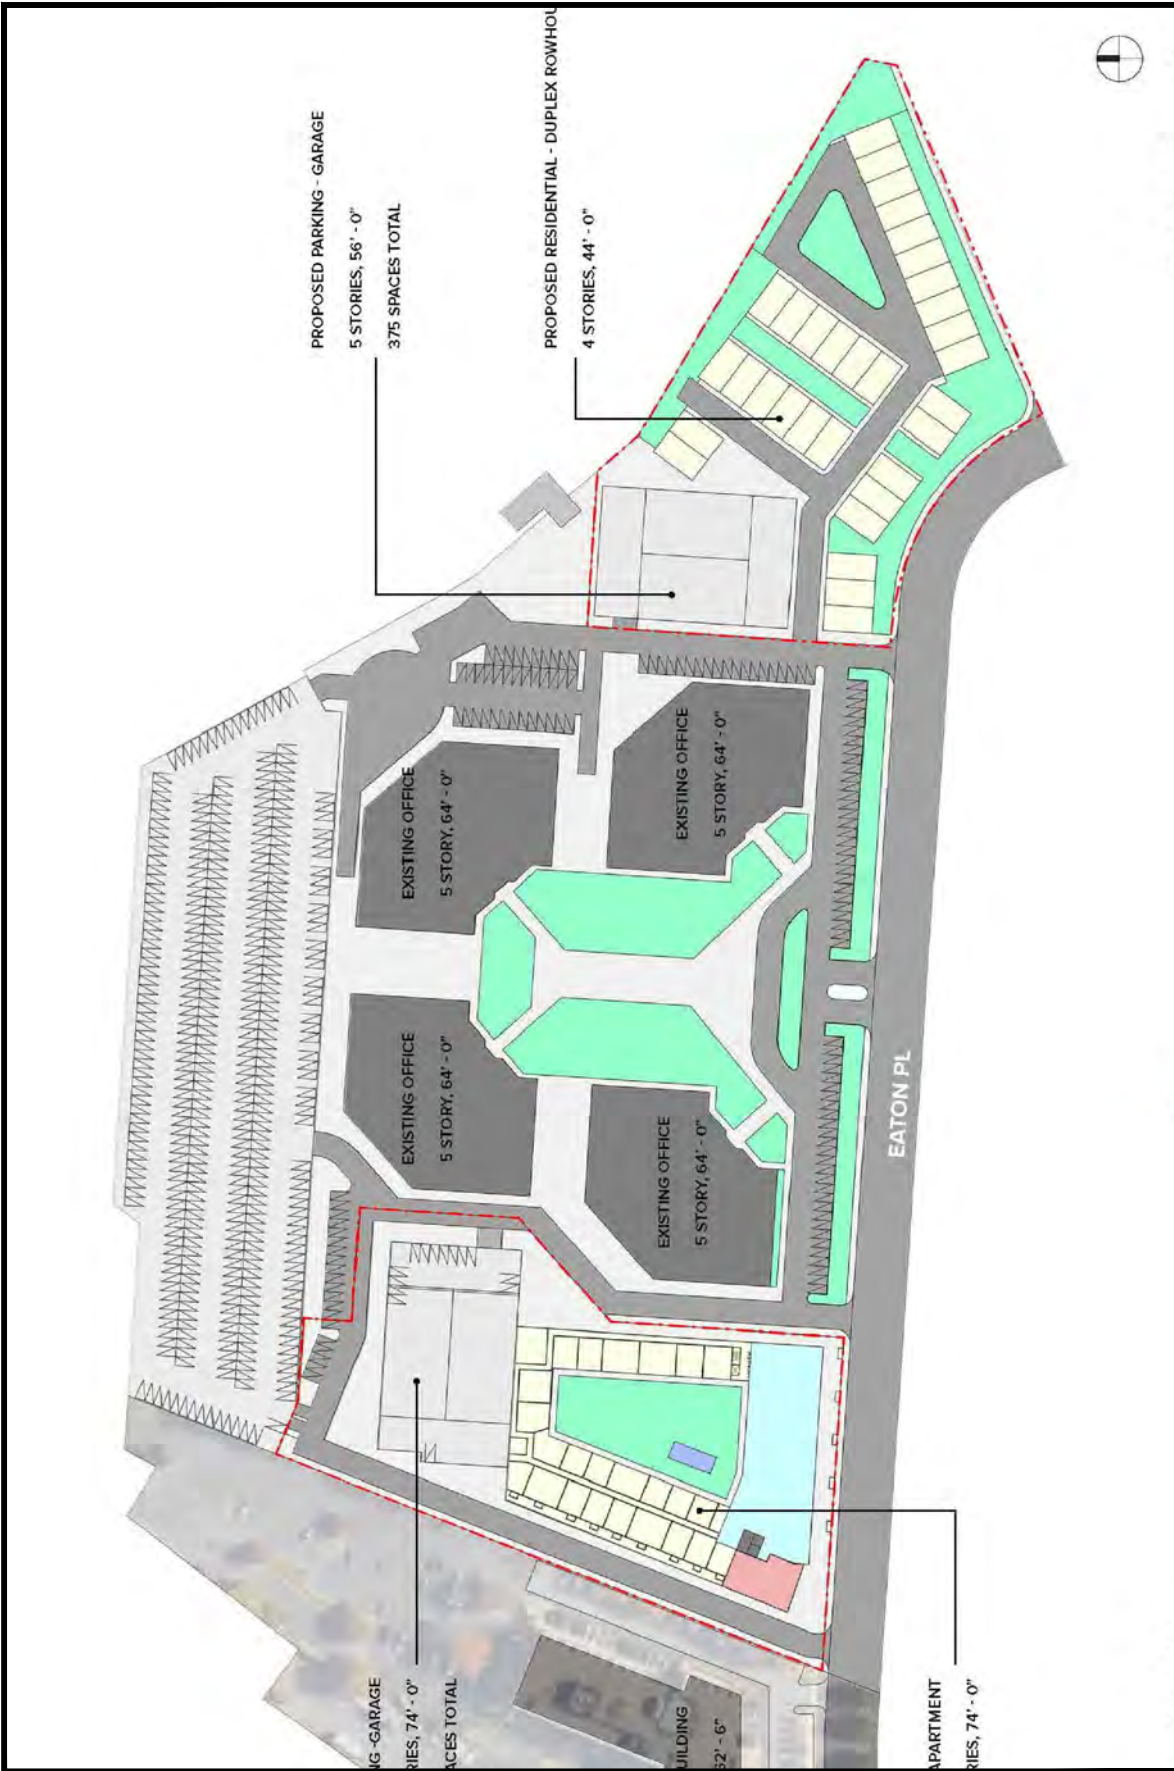

PLAN PROVIDED BY: HICKOK COLE

Figure 2
Proposed Development Plan

NORTH
Willowwood Plaza
City of Fairfax, Virginia



Table 1
 Willowood Plaza
 Site Trip Generation Summary (1)

Land Use	Size	Units	ITE Code	Weekday AM Peak Hour		Weekday PM Peak Hour		Weekday ADT	
				In	Out	In	Out		Total
<u>Proposed Uses</u>									
Multifamily Residential (Mid-Rise)	282	D.U.	221	26	86	112	43	110	1,299
2-over-2 Townhomes	64	D.U.	220	10	33	43	18	48	486
Residential Subtotal	346	D.U.		36	119	155	61	158	1,785
<i>Internal with Retail (5% AM, 10% PM, 15% Daily)</i>									
New Residential External Trips				-	-	-	1	2	47
				36	119	155	60	156	1,738
Retail Plaza									
	2,000	S.F.	822	6	4	10	12	25	314
<i>Internal with Residential (5% AM, 10% PM, 15% Daily)</i>									
				-	-	-	1	2	47
New External Retail Trips				6	4	10	11	23	267
Total New Trips				42	123	165	71	179	2,005

Notes:
 (1) Trip Generation based on ITE's Trip Generation, 11th Edition.

APPENDIX B

Existing Traffic Count Data



Wells + Associates, Inc

Tysons, Virginia

Turning Movement Count - Total Vehicles

PROJECT: Willowood Plaza	DATE: 5/3/2022	SOUTHBOUND ROAD: Chain Bridge Road - 123
W+A JOB NO: 8738	DAY: Tuesday	NORTHBOUND ROAD: Chain Bridge Road - 123
INTERSECTION: Chain Bridge Rd. & Eaton Pl.	WEATHER: clear	WESTBOUND ROAD: Eaton Place
LOCATION: Fairfax County, VA	COUNTED BY: Ramiz, Majda & Diagan	EASTBOUND ROAD: Eaton Place
INPUTED BY: agan		

Time Period	Southbound Chain Bridge Road - 123					Westbound Eaton Place					Northbound Chain Bridge Road - 123					Eastbound Eaton Place					North South	East West	Total				
	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru				Left/	Turn	Total	PHF
15 Minute Volumes																											
6:00 AM - 6:15 AM	1	40	24	0	65		15	3	9	0	27		2	79	1	0	82		0	0	6	0	6		147	33	180
6:15 AM - 6:30 AM	0	56	24	0	80		27	2	6	0	35		6	87	0	1	94		0	3	3	0	6		174	41	215
6:30 AM - 6:45 AM	2	75	37	1	115		39	4	11	0	54		4	129	3	2	138		4	3	6	0	13		253	67	320
6:45 AM - 7:00 AM	4	75	48	1	128		44	3	20	0	67		12	133	3	1	149		1	8	8	0	17		277	84	361
7:00 AM - 7:15 AM	5	85	50	1	141		36	5	13	0	54		7	157	4	0	168		4	5	11	0	20		309	74	383
7:15 AM - 7:30 AM	5	100	49	0	154		50	9	15	0	74		8	182	3	2	195		7	13	10	0	30		349	104	453
7:30 AM - 7:45 AM	6	124	68	0	198		64	5	16	0	85		9	200	0	1	210		3	22	14	0	39		408	124	532
7:45 AM - 8:00 AM	7	206	86	1	300		50	12	18	0	80		10	193	2	2	207		11	23	9	0	43		507	123	630
8:00 AM - 8:15 AM	2	190	99	0	291		63	11	16	0	90		12	225	1	1	239		5	16	14	0	35		530	125	655
8:15 AM - 8:30 AM	5	207	64	0	276		59	28	18	0	105		18	190	3	4	215		3	15	15	0	33		491	138	629
8:30 AM - 8:45 AM	8	185	71	0	264		58	8	21	0	87		10	161	1	4	176		7	12	9	0	28		440	115	555
8:45 AM - 9:00 AM	4	236	75	0	315		33	5	20	0	58		11	169	4	2	186		11	12	7	0	30		501	88	589
4:00 PM - 4:15 PM	5	232	107	0	344		84	18	19	0	121		17	141	4	4	166		3	8	10	0	21		510	142	652
4:15 PM - 4:30 PM	2	209	88	0	299		93	11	25	0	129		16	132	9	2	159		2	14	4	0	20		458	149	607
4:30 PM - 4:45 PM	14	191	80	0	285		79	12	22	0	113		16	164	8	3	191		6	9	4	0	19		476	132	608
4:45 PM - 5:00 PM	9	217	79	2	307		101	13	32	0	146		14	177	6	4	201		5	20	8	0	33		508	179	687
5:00 PM - 5:15 PM	15	219	69	3	306		104	11	24	0	139		10	196	3	5	214		3	16	6	0	25		520	164	684
5:15 PM - 5:30 PM	13	214	75	1	303		100	21	16	0	137		22	212	9	5	248		4	15	9	0	28		551	165	716
5:30 PM - 5:45 PM	19	193	74	0	286		104	20	17	0	141		18	181	7	1	207		3	8	8	0	19		493	160	653
5:45 PM - 6:00 PM	11	207	69	1	288		78	13	19	0	110		19	187	6	5	217		5	3	6	0	14		505	124	629
6:00 PM - 6:15 PM	10	184	51	0	245		83	20	23	0	126		16	164	7	3	190		4	12	9	0	25		435	151	586
6:15 PM - 6:30 PM	15	171	49	0	235		81	12	24	0	117		18	159	4	4	185		2	14	6	0	22		420	139	559
6:30 PM - 6:45 PM	10	170	72	0	252		59	17	19	0	95		7	142	1	2	152		4	9	7	0	20		404	115	519
6:45 PM - 7:00 PM	14	175	66	2	257		45	12	13	0	70		17	146	2	3	168		5	6	7	0	18		425	88	513
4:00 AM - 4:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:15 AM - 4:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:30 AM - 4:45 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:45 AM - 5:00 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:00 AM - 5:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:15 AM - 5:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:30 AM - 5:45 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:45 AM - 6:00 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
Total	186	3961	1574	13	5734		1549	275	436	0	2260		299	3906	91	61	4357		102	266	196	0	564		####	2824	####

Time Period	Southbound Chain Bridge Road - 123					Westbound Eaton Place					Northbound Chain Bridge Road - 123					Eastbound Eaton Place					North South	East West	Total				
	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru				Left/	Turn	Total	PHF
One Hour Volumes																											
6:00 AM - 7:00 AM	7	246	133	2	388	0.76	125	12	46	0	183	0.68	24	428	7	4	463	0.78	5	14	23	0	42	0.62	851	225	1076
6:15 AM - 7:15 AM	11	291	159	3	464	0.82	146	14	50	0	210	0.78	29	506	10	4	549	0.82	9	19	28	0	56	0.7	1013	266	1279
6:30 AM - 7:30 AM	16	335	184	3	538	0.87	169	21	59	0	249	0.84	31	601	13	5	650	0.83	16	29	35	0	80	0.67	1188	329	1517
6:45 AM - 7:45 AM	20	384	215	2	621	0.78	194	22	64	0	280	0.82	36	672	10	4	722	0.86	15	48	43	0	106	0.68	1343	386	1729
7:00 AM - 8:00 AM	23	515	253	2	793	0.66	200	31	62	0	293	0.86	34	732	9	5	780	0.93	25	63	44	0	132	0.77	1573	425	1998
7:15 AM - 8:15 AM	20	620	302	1	943	0.79	227	37	65	0	329	0.91	39	800	6	6	851	0.89	26	74	47	0	147	0.85	1794	476	2270
7:30 AM - 8:30 AM	20	727	317	1	1065	0.89	236	56	68	0	360	0.86	49	808	6	8	871	0.91	22	76	52	0	150	0.87	1936	510	2446
7:45 AM - 8:45 AM	22	788	320	1	1131	0.94	230	59	73	0	362	0.86	50	769	7	11	837	0.88	26	66	47	0	139	0.81	1968	501	2469
8:00 AM - 9:00 AM	19	818	309	0	1146	0.91	213	52	75	0	340	0.81	51	745	9	11	816	0.85	26	55	45	0	126	0.9	1962	466	2428
4:00 PM - 5:00 PM	30	849	354	2	1235	0.9	357	54	98	0	509	0.87	63	614	27	13	717	0.89	16	51	26	0	93	0.7	1952	602	2554
4:15 PM - 5:15 PM	40	836	316	5	1197	0.97	377	47	103	0	527	0.9	56	669	26	14	765	0.89	16	59	22	0	97	0.73	1962	624	2586
4:30 PM - 5:30 PM	51	841	303	6	1201	0.98	384	57	94	0	535	0.92	62	749	26	17	854	0.86	18	60	27	0	105	0.8	2055	640	2695
4:45 PM - 5:45 PM	56	843	297	6	1202	0.98	409	65	89	0	563	0.96	64	766	25	15	870	0.88	15	59	31	0	105	0.8	2072	668	2740
5:00 PM - 6:00 PM	58	833	287	5	1183	0.97	386	65	76	0	527	0.93	69	776	25	16	886	0.89	15	42	29	0	86	0.77	2069	613	2682
5:15 PM - 6:15 PM	53	798	269	2	1122	0.93	365	74	75	0	514	0.91	75	744	29	14	862	0.87	16	38	32	0	86	0.77	1984	600	2584
5:30 PM - 6:30 PM	55	755	243	1	1054	0.91	346	65	83	0	494	0.88	71	691	24	13	799	0.92	14	37	29	0	80	0.8	1853	574	2427
5:45 PM - 6:45 PM	46	732	241	1	1020	0.89	301	62	85	0	448	0.89	60	652	18	14	744	0.86	15	38	28	0	81	0.81	1764	529	2293
6:00 PM - 7:00 PM	49	700	238	2	989	0.96	268	61	79	0	408	0.81	58	611	14	12	695	0.91	15	41	29	0	85	0.85	1684	493	2177

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Bicycles

PROJECT: Willowwood Plaza		DATE: 5/3/2022		SOUTHBOUND ROAD: Chain Bridge Road - 123															
W+A JOB NO: 8738		DAY: Tuesday		NORTHBOUND ROAD: Chain Bridge Road - 123															
INTERSECTION: Chain Bridge Rd. & Eaton Place		WEATHER: clear		WESTBOUND ROAD: Eaton Place															
LOCATION: Fairfax County, VA		COUNTED BY: Majda		EASTBOUND ROAD: Eaton Place															
INPUTED BY: agan																			
Time Period	Southbound Chain Bridge Road - 123				Westbound Eaton Place				Northbound Chain Bridge Road - 123				Eastbound Eaton Place				North East & & Total		
	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	South	West	
15 Minute Volumes																			
6:00 AM - 6:15 AM				0				0				0				0	0	0	0
6:15 AM - 6:30 AM				0				0				0				0	0	0	0
6:30 AM - 6:45 AM				0				0				0				0	0	0	0
6:45 AM - 7:00 AM				0				0				0				0	0	0	0
7:00 AM - 7:15 AM				0				0				0				0	0	0	0
7:15 AM - 7:30 AM				0				0				0				0	0	0	0
7:30 AM - 7:45 AM				0				0				0				1	0	1	1
7:45 AM - 8:00 AM				0				0				0				1	0	1	1
8:00 AM - 8:15 AM				0				0				0				0	0	0	0
8:15 AM - 8:30 AM				0				0				0				0	0	0	0
8:30 AM - 8:45 AM				0				0				0				0	0	0	0
8:45 AM - 9:00 AM				0				1				0				0	0	1	1
4:00 PM - 4:15 PM				0				0				0				0	0	0	0
4:15 PM - 4:30 PM				0				0				0				0	0	0	0
4:30 PM - 4:45 PM				0				0				0				0	0	0	0
4:45 PM - 5:00 PM				0				0					1			0	1	0	1
5:00 PM - 5:15 PM				0				0				0				0	0	0	0
5:15 PM - 5:30 PM				0				0				0				1	0	1	1
5:30 PM - 5:45 PM				0				0				0				0	0	0	0
5:45 PM - 6:00 PM				0				1					1			1	0	2	2
6:00 PM - 6:15 PM				0				0				0				0	0	0	0
6:15 PM - 6:30 PM				0				0				0				0	0	0	0
6:30 PM - 6:45 PM				0				0				0				0	0	0	0
6:45 PM - 7:00 PM				0				0				0				0	0	0	0
Total	0	0	0	0	0			2	0	0			0	4	0	4		6	7
One Hour Volumes																			
6:00 AM - 7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:15 AM - 7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:30 AM - 7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:45 AM - 7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
7:00 AM - 8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2	2
7:15 AM - 8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2	2
7:30 AM - 8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2	2
7:45 AM - 8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0		0		0			
8:00 AM - 9:00 AM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	1	1	1
4:00 PM - 5:00 PM	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	1	0	1
4:15 PM - 5:15 PM	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	0	1	0	1
4:30 PM - 5:30 PM	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	1	1	1	2
4:45 PM - 5:45 PM	0	0	0	0	0	0	0	0	0	0	1	1	0	1	0	1	1	1	2
5:00 PM - 6:00 PM	0	0	0	0	0	0	1	1	0	0	0	0	0	2	0	2	0	3	3
5:15 PM - 6:15 PM	0	0	0	0	0	0	1	1	0	0	0	0	0	2	0	2	0	3	3
5:30 PM - 6:30 PM	0	0	0	0	0	0	1	1	0	0	0	0	0	1	0	1	0	2	2
5:45 PM - 6:45 PM	0	0	0	0	0	0	1	1	0	0	0	0	0	1	0	1	0	2	2
6:00 PM - 7:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Wells + Associates, Inc.

Tysons, Virginia

Pedestrian Volume Survey

<p>PROJECT: Willowood Plaza W + A JOB NO: 8738 INTERSECTION: Chain Bridge Rd. & Eaton Pl. LOCATION: Fairfax County, VA DATE: 5/3/2022 DAY: Tuesday WEATHER: clear COUNTED BY: Ramiz INPUTED BY: agan</p>	<p style="text-align: center;">Chain Bridge Road - 123</p> <p style="text-align: center;">Eaton Place</p> <p style="text-align: center;">Eaton Place</p> <p style="text-align: center;">Chain Bridge Road - 123</p> <p style="text-align: right;">North ↑</p>
---	---

Time Period	Movement								1+2	3+4	5+6	7+8	Total
	1	2	3	4	5	6	7	8					
15 Minute Volumes													
6:00 AM - 6:15 AM									0	0	0	0	0
6:15 AM - 6:30 AM									0	0	0	0	0
6:30 AM - 6:45 AM									0	0	0	0	0
6:45 AM - 7:00 AM									0	0	0	0	0
7:00 AM - 7:15 AM									0	0	0	0	0
7:15 AM - 7:30 AM									0	0	0	0	0
7:30 AM - 7:45 AM		1							1	0	0	0	1
7:45 AM - 8:00 AM									0	0	0	0	0
8:00 AM - 8:15 AM	1								1	0	0	0	1
8:15 AM - 8:30 AM									0	0	0	0	0
8:30 AM - 8:45 AM									0	0	0	0	0
8:45 AM - 9:00 AM									0	0	0	0	0
4:00 PM - 4:15 PM									0	0	0	0	0
4:15 PM - 4:30 PM						2			0	0	2	0	2
4:30 PM - 4:45 PM	3				1				3	0	1	0	4
4:45 PM - 5:00 PM									0	0	0	0	0
5:00 PM - 5:15 PM									0	0	0	0	0
5:15 PM - 5:30 PM									0	0	0	0	0
5:30 PM - 5:45 PM							1		0	0	1	0	1
5:45 PM - 6:00 PM					1	1			0	0	2	0	2
6:00 PM - 6:15 PM					1				0	0	1	0	1
6:15 PM - 6:30 PM									0	0	0	0	0
6:30 PM - 6:45 PM						1			0	0	1	0	1
6:45 PM - 7:00 PM						1			0	0	1	0	1
Total	4	1	0	0	3	6	0	0	5	0	9	0	14
One Hour Volumes													
6:00 AM - 7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0
6:15 AM - 7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0
6:30 AM - 7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0
6:45 AM - 7:45 AM	0	1	0	0	0	0	0	0	1	0	0	0	1
7:00 AM - 8:00 AM	0	1	0	0	0	0	0	0	1	0	0	0	1
7:15 AM - 8:15 AM	1	1	0	0	0	0	0	0	2	0	0	0	2
7:30 AM - 8:30 AM	1	1	0	0	0	0	0	0	2	0	0	0	2
7:45 AM - 8:45 AM	1	0	0	0	0	0	0	0	1	0	0	0	1
8:00 AM - 9:00 AM	1	0	0	0	0	0	0	0	1	0	0	0	1
4:00 PM - 5:00 PM	3	0	0	0	1	2	0	0	3	0	3	0	6
4:15 PM - 5:15 PM	3	0	0	0	1	2	0	0	3	0	3	0	6
4:30 PM - 5:30 PM	3	0	0	0	1	0	0	0	3	0	1	0	4
4:45 PM - 5:45 PM	0	0	0	0	0	1	0	0	0	0	1	0	1
5:00 PM - 6:00 PM	0	0	0	0	1	2	0	0	0	0	3	0	3
5:15 PM - 6:15 PM	0	0	0	0	2	2	0	0	0	0	4	0	4
5:30 PM - 6:30 PM	0	0	0	0	2	2	0	0	0	0	4	0	4
5:45 PM - 6:45 PM	0	0	0	0	2	2	0	0	0	0	4	0	4
6:00 PM - 7:00 PM	0	0	0	0	1	2	0	0	0	0	3	0	3

Wells + Associates, Inc

Tysons, Virginia

Turning Movement Count - Total Vehicles

PROJECT: Willowood Plaza	DATE: 5/3/2022	SOUTHBOUND ROAD: Service Drive
W+A JOB NO: 8738	DAY: Tuesday	NORTHBOUND ROAD: Service Drive
INTERSECTION: Eaton Pl. & Service Drive	WEATHER: clear	WESTBOUND ROAD: Eaton Place
LOCATION: Fairfax County, VA	COUNTED BY: Agan	EASTBOUND ROAD: Eaton Place
INPUTED BY: agan		

Time Period	Southbound Service Drive					Westbound Eaton Place					Northbound Service Drive					Eastbound Eaton Place					North South	East West	Total
	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF			
15 Minute Volumes																							
6:00 AM - 6:15 AM	17	6	11	0	34	0	2	0	0	2	1	0	0	0	1	0	23	4	0	27	35	29	64
6:15 AM - 6:30 AM	22	2	12	0	36	1	16	0	0	17	0	0	0	0	0	0	28	4	0	32	36	49	85
6:30 AM - 6:45 AM	32	0	5	0	37	1	22	0	0	23	4	0	0	0	4	1	33	6	0	40	41	63	104
6:45 AM - 7:00 AM	37	0	5	0	42	5	30	0	0	35	0	0	0	0	0	1	59	13	0	73	42	108	150
7:00 AM - 7:15 AM	24	0	13	0	37	0	26	0	0	26	3	0	0	0	3	1	49	12	0	62	40	88	128
7:15 AM - 7:30 AM	31	0	14	0	45	4	43	0	0	47	0	0	1	0	1	0	56	10	0	66	46	113	159
7:30 AM - 7:45 AM	28	3	9	0	40	9	53	0	0	62	1	0	3	0	4	1	85	12	0	98	44	160	204
7:45 AM - 8:00 AM	35	1	14	0	50	9	52	0	0	61	2	1	1	0	4	0	143	12	0	155	54	216	270
8:00 AM - 8:15 AM	30	3	15	0	48	11	59	0	0	70	1	0	1	0	2	1	121	9	0	131	50	201	251
8:15 AM - 8:30 AM	46	0	8	0	54	3	56	0	0	59	0	1	0	0	1	2	74	13	0	89	55	148	203
8:30 AM - 8:45 AM	43	4	6	0	53	2	57	0	0	59	4	1	0	0	5	0	78	16	0	94	58	153	211
8:45 AM - 9:00 AM	28	0	3	0	31	5	32	0	0	37	1	0	5	0	6	1	95	15	0	111	37	148	185
4:00 PM - 4:15 PM	17	1	10	0	28	17	105	0	0	122	1	0	2	0	3	0	104	30	0	134	31	256	287
4:15 PM - 4:30 PM	32	0	9	0	41	18	84	1	0	103	0	2	1	0	3	1	76	43	0	120	44	223	267
4:30 PM - 4:45 PM	32	1	9	0	42	13	92	1	0	106	1	3	1	0	5	1	74	30	0	105	47	211	258
4:45 PM - 5:00 PM	33	1	8	0	42	10	119	1	0	130	0	2	2	0	4	0	62	31	0	93	46	223	269
5:00 PM - 5:15 PM	26	1	9	0	36	8	82	1	0	91	1	0	2	0	3	1	61	33	0	95	39	186	225
5:15 PM - 5:30 PM	19	0	11	0	30	13	128	0	0	141	1	2	0	0	3	1	74	35	0	110	33	251	284
5:30 PM - 5:45 PM	26	18	7	0	51	13	131	0	0	144	0	7	0	0	7	0	66	46	0	112	58	256	314
5:45 PM - 6:00 PM	27	4	9	0	40	8	64	1	0	73	1	2	0	0	3	0	54	32	0	86	43	159	202
6:00 PM - 6:15 PM	38	0	8	0	46	13	88	0	0	101	2	0	0	0	2	0	53	32	0	85	48	186	234
6:15 PM - 6:30 PM	31	0	9	0	40	11	93	0	0	104	1	2	2	0	5	0	38	37	0	75	45	179	224
6:30 PM - 6:45 PM	30	18	7	0	55	7	69	0	0	76	0	3	1	0	4	5	57	36	0	98	59	174	233
6:45 PM - 7:00 PM	14	0	5	0	19	9	50	0	0	59	3	0	1	0	4	0	62	35	0	97	23	156	179
4:00 AM - 4:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:15 AM - 4:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:30 AM - 4:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:45 AM - 5:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:00 AM - 5:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:15 AM - 5:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:30 AM - 5:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:45 AM - 6:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	698	63	216	0	977	190	1553	5	0	1748	28	26	23	0	77	17	1625	546	0	2188	1054	3936	4990

Time Period	Southbound Service Drive					Westbound Eaton Place					Northbound Service Drive					Eastbound Eaton Place					North South	East West	Total				
	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF							
One Hour Volumes																											
6:00 AM - 7:00 AM	108	8	33	0	149	0.89	7	70	0	0	77	0.55	5	0	0	0	5	0.31	2	143	27	0	172	0.59	154	249	403
6:15 AM - 7:15 AM	115	2	35	0	152	0.9	7	94	0	0	101	0.72	7	0	0	0	7	0.44	3	169	35	0	207	0.71	159	308	467
6:30 AM - 7:30 AM	124	0	37	0	161	0.89	10	121	0	0	131	0.7	7	0	1	0	8	0.5	3	197	41	0	241	0.83	169	372	541
6:45 AM - 7:45 AM	120	3	41	0	164	0.91	18	152	0	0	170	0.69	4	0	4	0	8	0.5	3	249	47	0	299	0.76	172	469	641
7:00 AM - 8:00 AM	118	4	50	0	172	0.86	22	174	0	0	196	0.79	6	1	5	0	12	0.75	2	333	46	0	381	0.61	184	577	761
7:15 AM - 8:15 AM	124	7	52	0	183	0.92	33	207	0	0	240	0.86	4	1	6	0	11	0.69	2	405	43	0	450	0.73	194	690	884
7:30 AM - 8:30 AM	139	7	46	0	192	0.89	32	220	0	0	252	0.9	4	2	5	0	11	0.69	4	423	46	0	473	0.76	203	725	928
7:45 AM - 8:45 AM	154	8	43	0	205	0.95	25	224	0	0	249	0.89	7	3	2	0	12	0.6	3	416	50	0	469	0.76	217	718	935
8:00 AM - 9:00 AM	147	7	32	0	186	0.86	21	204	0	0	225	0.8	6	2	6	0	14	0.58	4	368	53	0	425	0.81	200	650	850
4:00 PM - 5:00 PM	114	3	36	0	153	0.91	58	400	3	0	461	0.89	2	7	6	0	15	0.75	2	316	134	0	452	0.84	168	913	1081
4:15 PM - 5:15 PM	123	3	35	0	161	0.96	49	377	4	0	430	0.83	2	7	6	0	15	0.75	3	273	137	0	413	0.86	176	843	1019
4:30 PM - 5:30 PM	110	3	37	0	150	0.89	44	421	3	0	468	0.83	3	7	5	0	15	0.75	3	271	129	0	403	0.92	165	871	1036
4:45 PM - 5:45 PM	104	20	35	0	159	0.78	44	460	2	0	506	0.88	2	11	4	0	17	0.61	2	263	145	0	410	0.92	176	916	1092
5:00 PM - 6:00 PM	98	23	36	0	157	0.77	42	405	2	0	449	0.78	3	11	2	0	16	0.57	2	255	146	0	403	0.9	173	852	1025
5:15 PM - 6:15 PM	110	22	35	0	167	0.82	47	411	1	0	459	0.8	4	11	0	0	15	0.54	1	247	145	0	393	0.88	182	852	1034
5:30 PM - 6:30 PM	122	22	33	0	177	0.87	45	376	1	0	422	0.73	4	11	2	0	17	0.61	0	211	147	0	358	0.8	194	780	974
5:45 PM - 6:45 PM	126	22	33	0	181	0.82	39	314	1	0	354	0.85	4	7	3	0	14	0.7	5	202	137	0	344	0.88	195	698	893
6:00 PM - 7:00 PM	113	18	29	0	160	0.73	40	300	0	0	340	0.82	6	5	4	0	15	0.75	5	210	140	0	355	0.91	175	695	870

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Bicycles

PROJECT: Willowood Plaza DATE: 5/3/2022 UTHBOUND ROAD: Service Drive W+A JOB NO: 8738 DAY: Tuesday RTHBOUND ROAD: Service Drive INTERSECTION: Eaton Pl. & Service Drive WEATHER: clear WESTBOUND ROAD: Eaton Place LOCATION: Fairfax County, VA COUNTED BY: Agan EASTBOUND ROAD: Eaton Place INPUTED BY: agan																				
Time Period	Southbound Service Drive				Westbound Eaton Place				Northbound Service Drive				Eastbound Eaton Place				North East & & Total			
	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	South	West		
15 Minute Volumes																				
6:00 AM - 6:15 AM			1	1				0				0				0	1	0	1	
6:15 AM - 6:30 AM				0				0				0				0	0	0	0	
6:30 AM - 6:45 AM				0				0				0				0	0	0	0	
6:45 AM - 7:00 AM				0				0				0				0	0	0	0	
7:00 AM - 7:15 AM				0				0				0				0	0	0	0	
7:15 AM - 7:30 AM				0				0				0				0	0	0	0	
7:30 AM - 7:45 AM			1	1				0				0			1	1	1	1	2	
7:45 AM - 8:00 AM			3	3				0				0			1	1	3	1	4	
8:00 AM - 8:15 AM				0				0				0				0	0	0	0	
8:15 AM - 8:30 AM				0				0				0				0	0	0	0	
8:30 AM - 8:45 AM				0				0				0				0	0	0	0	
8:45 AM - 9:00 AM			1	1				0				0				0	1	0	1	
4:00 PM - 4:15 PM				0				0				0				0	0	0	0	
4:15 PM - 4:30 PM				0				0				0				0	0	0	0	
4:30 PM - 4:45 PM				0				0				0				0	0	0	0	
4:45 PM - 5:00 PM				0				0				0				0	0	0	0	
5:00 PM - 5:15 PM				0				0				0				0	0	0	0	
5:15 PM - 5:30 PM				0				0				0				0	0	0	0	
5:30 PM - 5:45 PM				0				0				0				0	0	0	0	
5:45 PM - 6:00 PM				0				0				0				0	0	0	0	
6:00 PM - 6:15 PM				0				0				0				0	0	0	0	
6:15 PM - 6:30 PM				0				0				3			3		3	0	3	
6:30 PM - 6:45 PM				0				0				0				0	0	0	0	
6:45 PM - 7:00 PM			1	1				0				0				0	1	0	1	
Total	1	5	1	7	0	0	0	0	0	0	3	0	3	0	2	0	2	10	2	12
One Hour Volumes																				
6:00 AM - 7:00 AM	0	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	
6:15 AM - 7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
6:30 AM - 7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
6:45 AM - 7:45 AM	0	1	0	1	0	0	0	0	0	0	0	0	0	1	0	1	1	1	2	
7:00 AM - 8:00 AM	0	4	0	4	0	0	0	0	0	0	0	0	0	2	0	2	4	2	6	
7:15 AM - 8:15 AM	0	4	0	4	0	0	0	0	0	0	0	0	0	2	0	2	4	2	6	
7:30 AM - 8:30 AM	0	4	0	4	0	0	0	0	0	0	0	0	0	2	0	2	4	2	6	
7:45 AM - 8:45 AM	0	3	0	3	0	0	0	0	0	0	0	0	0	1	0	1	3	1	4	
8:00 AM - 9:00 AM	1	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	
4:00 PM - 5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4:15 PM - 5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4:30 PM - 5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4:45 PM - 5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5:00 PM - 6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5:15 PM - 6:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5:30 PM - 6:30 PM	0	0	0	0	0	0	0	0	0	0	3	0	3	0	0	0	3	0	3	
5:45 PM - 6:45 PM	0	0	0	0	0	0	0	0	0	0	3	0	3	0	0	0	3	0	3	
6:00 PM - 7:00 PM	0	1	0	1	0	0	0	0	0	0	3	0	3	0	0	0	4	0	4	

Wells + Associates, Inc.

Tysons, Virginia

Pedestrian Volume Survey

<p>PROJECT: Willowood Plaza W + A JOB NO: 8738 INTERSECTION: Eaton Pl. & Service Drive LOCATION: Fairfax County, VA DATE: 5/3/2022 DAY: Tuesday WEATHER: clear COUNTED BY: Agan INPUTED BY: agan</p>	
---	--

Time Period	Movement								1+2	3+4	5+6	7+8	Total	
	1	2	3	4	5	6	7	8						
15 Minute Volumes														
6:00 AM - 6:15 AM			1							0	1	0	0	1
6:15 AM - 6:30 AM				1						0	1	0	0	1
6:30 AM - 6:45 AM				2						0	2	0	0	2
6:45 AM - 7:00 AM										0	0	0	0	0
7:00 AM - 7:15 AM			1							0	1	0	0	1
7:15 AM - 7:30 AM				1						0	1	0	0	1
7:30 AM - 7:45 AM				2	1	1				0	2	2	0	4
7:45 AM - 8:00 AM				2	2					0	2	2	0	4
8:00 AM - 8:15 AM		2	1	1	2					2	2	2	0	6
8:15 AM - 8:30 AM			1				1			0	1	1	0	2
8:30 AM - 8:45 AM			1							0	1	0	0	1
8:45 AM - 9:00 AM			4							0	4	0	0	4
4:00 PM - 4:15 PM		1	1							1	1	0	0	2
4:15 PM - 4:30 PM			1			2				0	1	2	0	3
4:30 PM - 4:45 PM		1	2	3						1	5	0	0	6
4:45 PM - 5:00 PM		1	1							1	1	0	0	2
5:00 PM - 5:15 PM			4							0	4	0	0	4
5:15 PM - 5:30 PM		2		1						2	1	0	0	3
5:30 PM - 5:45 PM				1	2					0	1	2	0	3
5:45 PM - 6:00 PM		3	2		2					3	2	2	0	7
6:00 PM - 6:15 PM			1	1						0	2	0	0	2
6:15 PM - 6:30 PM		2	5							2	5	0	0	7
6:30 PM - 6:45 PM		1	1		1					1	1	1	0	3
6:45 PM - 7:00 PM			1							0	1	0	0	1
Total	0	13	28	15	12	2	0	0		13	43	14	0	70

Time Period	Movement								1+2	3+4	5+6	7+8	Total	
	1	2	3	4	5	6	7	8						
One Hour Volumes														
6:00 AM - 7:00 AM	0	0	1	3	0	0	0	0		0	4	0	0	4
6:15 AM - 7:15 AM	0	0	1	3	0	0	0	0		0	4	0	0	4
6:30 AM - 7:30 AM	0	0	1	3	0	0	0	0		0	4	0	0	4
6:45 AM - 7:45 AM	0	0	1	3	1	1	0	0		0	4	2	0	6
7:00 AM - 8:00 AM	0	0	1	5	3	1	0	0		0	6	4	0	10
7:15 AM - 8:15 AM	0	2	1	6	5	1	0	0		2	7	6	0	15
7:30 AM - 8:30 AM	0	2	2	5	5	2	0	0		2	7	7	0	16
7:45 AM - 8:45 AM	0	2	3	3	4	1	0	0		2	6	5	0	13
8:00 AM - 9:00 AM	0	2	7	1	2	1	0	0		2	8	3	0	13
4:00 PM - 5:00 PM	0	3	5	3	2	0	0	0		3	8	2	0	13
4:15 PM - 5:15 PM	0	2	8	3	2	0	0	0		2	11	2	0	15
4:30 PM - 5:30 PM	0	4	7	4	0	0	0	0		4	11	0	0	15
4:45 PM - 5:45 PM	0	3	5	2	2	0	0	0		3	7	2	0	12
5:00 PM - 6:00 PM	0	5	6	2	4	0	0	0		5	8	4	0	17
5:15 PM - 6:15 PM	0	5	3	3	4	0	0	0		5	6	4	0	15
5:30 PM - 6:30 PM	0	5	8	2	4	0	0	0		5	10	4	0	19
5:45 PM - 6:45 PM	0	6	9	1	3	0	0	0		6	10	3	0	19
6:00 PM - 7:00 PM	0	3	8	1	1	0	0	0		3	9	1	0	13

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Passenger Cars

Time Period		Southbound Eaton Place				Westbound Fairfax Boulevard - 50				Northbound Driveway				Eastbound Fairfax Boulevard - 50				North & South	East & West	Total																																							
		Right	Thru	Left	U-Turn	Total	Right	Thru	Left	U-Turn	Total	Right	Thru	Left	U-Turn	Total	Right				Thru	Left	U-Turn	Total																																			
PROJECT: Willowood Plaza																				DATE: 5/3/2022																				SOUTHBOUND ROAD: Eaton Place																			
W+A JOB NO: 8738																				DAY: Tuesday																				NORTHBOUND ROAD: Driveway																			
INTERSECTION: Fairfax Blvd. & Eaton Pl.																				WEATHER: clear																				WESTBOUND ROAD: Fairfax Boulevard - 50																			
LOCATION: Fairfax County,VA																				COUNTED BY: James,Inita & Austin																				EASTBOUND ROAD: Fairfax Boulevard - 50																			
																				INPUTED BY: agan																																							
15 Minute Volumes																																																											
6:00 AM - 6:15 AM		5	0	21		26	10	57	0		67	0	0	0		0	0	117	2		119	26	186	212																																			
6:15 AM - 6:30 AM		2	0	22		24	12	91	1		104	0	0	0		0	0	173	4		177	24	281	305																																			
6:30 AM - 6:45 AM		5	0	39		44	21	97	1		119	0	0	0		0	0	234	14		248	44	367	411																																			
6:45 AM - 7:00 AM		1	0	47		48	27	124	1		152	1	0	0		1	1	218	1		220	49	372	421																																			
7:00 AM - 7:15 AM		2	0	56		58	34	112	0		146	0	0	0		0	0	201	3		204	58	350	408																																			
7:15 AM - 7:30 AM		2	0	39		41	32	150	0		182	0	0	0		0	1	283	3		287	41	469	510																																			
7:30 AM - 7:45 AM		1	0	62		63	48	162	3		213	0	0	0		0	0	291	1		292	63	505	568																																			
7:45 AM - 8:00 AM		2	1	118		120	49	159	1		209	0	0	1		1	1	405	9		415	121	624	745																																			
8:00 AM - 8:15 AM		1	1	68		71	65	255	4		324	1	0	1		2	0	387	12		399	73	723	796																																			
8:15 AM - 8:30 AM		5	0	44		49	43	219	2		264	0	0	0		0	0	269	17		286	49	550	599																																			
8:30 AM - 8:45 AM		5	0	59		64	44	184	1		229	1	0	0		1	1	297	12		310	65	539	604																																			
8:45 AM - 9:00 AM		3	0	22		25	16	156	0		172	1	0	3		4	1	214	12		227	29	399	428																																			
4:00 PM - 4:15 PM		16	0	122		138	72	375	2		449	2	1	2		5	0	298	5		303	143	752	895																																			
4:15 PM - 4:30 PM		13	2	93		108	79	321	5		405	1	0	2		3	2	313	9		324	111	729	840																																			
4:30 PM - 4:45 PM		14	1	74		89	69	326	0		395	3	0	4		7	1	278	7		286	96	681	777																																			
4:45 PM - 5:00 PM		13	0	63		76	89	383	2		474	0	1	0		1	1	225	7		233	77	707	784																																			
5:00 PM - 5:15 PM		13	0	79		92	80	355	1		436	0	0	1		1	0	264	7		271	93	707	800																																			
5:15 PM - 5:30 PM		17	0	79		96	103	354	1		458	1	0	1		2	0	256	8		264	98	722	820																																			
5:30 PM - 5:45 PM		14	0	72		86	91	366	0		457	0	1	1		2	0	243	9		252	88	709	797																																			
5:45 PM - 6:00 PM		17	0	68		85	68	302	2		372	1	1	4		6	1	241	8		250	91	622	713																																			
6:00 PM - 6:15 PM		14	0	51		65	72	312	4		388	5	3	4		12	1	217	4		222	77	610	687																																			
6:15 PM - 6:30 PM		5	1	35		41	53	334	4		391	2	0	3		5	0	203	3		206	46	597	643																																			
6:30 PM - 6:45 PM		12	0	80		92	46	240	2		288	0	1	2		3	0	236	4		240	95	528	623																																			
6:45 PM - 7:00 PM		10	0	66		76	56	330	2		388	1	0	1		2	0	215	6		221	78	609	687																																			
Total		192	6	1479	0	1677	1279	5764	39	0	7082	20	8	30	0	58	11	6078	167	0	6256	1735	13338	15073																																			
One Hour Volumes																																																											
6:00 AM - 7:00 AM		13	0	129	0	142	70	369	3	0	442	1	0	0	0	1	1	742	21	0	764	143	1206	1349																																			
6:15 AM - 7:15 AM		10	0	164	0	174	94	424	3	0	521	1	0	0	0	1	1	826	22	0	849	175	1370	1545																																			
6:30 AM - 7:30 AM		10	0	181	0	191	114	483	2	0	599	1	0	0	0	1	2	936	21	0	959	192	1558	1750																																			
6:45 AM - 7:45 AM		6	0	204	0	210	141	548	4	0	693	1	0	0	0	1	2	993	8	0	1003	211	1696	1907																																			
7:00 AM - 8:00 AM		6	1	275	0	282	163	583	4	0	750	0	0	1	0	1	2	1180	16	0	1198	283	1948	2231																																			
7:15 AM - 8:15 AM		6	2	287	0	295	194	726	8	0	928	1	0	2	0	3	2	1366	25	0	1393	298	2321	2619																																			
7:30 AM - 8:30 AM		9	2	292	0	303	205	795	10	0	1010	1	0	2	0	3	1	1352	39	0	1392	306	2402	2708																																			
7:45 AM - 8:45 AM		13	2	289	0	304	201	817	8	0	1026	2	0	2	0	4	2	1358	50	0	1410	308	2436	2744																																			
8:00 AM - 9:00 AM		15	1	193	0	209	168	814	7	0	989	3	0	4	0	7	2	1167	53	0	1222	216	2211	2427																																			
4:00 PM - 5:00 PM		56	3	352	0	411	309	1405	9	0	1723	6	2	8	0	16	4	1114	28	0	1146	427	2869	3296																																			
4:15 PM - 5:15 PM		53	3	309	0	365	317	1385	8	0	1710	4	1	7	0	12	4	1080	30	0	1114	377	2824	3201																																			
4:30 PM - 5:30 PM		57	1	295	0	353	341	1418	4	0	1763	4	1	6	0	11	2	1023	29	0	1054	364	2817	3181																																			
4:45 PM - 5:45 PM		57	0	293	0	350	363	1458	4	0	1825	1	2	3	0	6	1	988	31	0	1020	356	2845	3201																																			
5:00 PM - 6:00 PM		61	0	298	0	359	342	1377	4	0	1723	2	2	7	0	11	1	1004	32	0	1037	370	2760	3130																																			
5:15 PM - 6:15 PM		62	0	270	0	332	334	1334	7	0	1675	7	5	10	0	22	2	957	29	0	988	354	2663	3017																																			
5:30 PM - 6:30 PM		50	1	226	0	277	284	1314	10	0	1608	8	5	12	0	25	2	904	24	0	930	302	2538	2840																																			
5:45 PM - 6:45 PM		48	1	234	0	283	239	1188	12	0	1439	8	5	13	0	26	2	897	19	0	918	309	2357	2666																																			
6:00 PM - 7:00 PM		41	1	232	0	274	227	1216	12	0	1455	8	4	10	0	22	1	871	17	0	889	296	2344	2640																																			

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Heavy Vehicles

Time Period		Southbound Eaton Place				Westbound Fairfax Boulevard - 50				Northbound Driveway				Eastbound Fairfax Boulevard - 50				North & South	East & West	Total				
		Right	Thru	Left	U-Turn	Total	Right	Thru	Left	U-Turn	Total	Right	Thru	Left	U-Turn	Total	Right				Thru	Left	U-Turn	Total
15 Minute Volumes																								
6:00 AM - 6:15 AM		1			1	0			0	0	0	0	0	0	0	0			1	0	1			
6:15 AM - 6:30 AM		0			0	0			0	0	0	0	0	0	0	1			1	0	1			
6:30 AM - 6:45 AM		0			0	0			0	0	0	0	0	0	0	0			0	0	0			
6:45 AM - 7:00 AM		0			0	0			0	0	0	1	0	0	1	0			0	1	0			
7:00 AM - 7:15 AM		0			0	0			0	0	1	0	0	0	1	0			0	1	0			
7:15 AM - 7:30 AM		0			0	0			0	0	0	0	0	0	1			1	0	1				
7:30 AM - 7:45 AM		0			0	0			0	0	0	0	0	0	1			1	0	1				
7:45 AM - 8:00 AM		0			0	1			1	0	0	0	0	0	0			0	0	1				
8:00 AM - 8:15 AM		0			0	0			0	0	0	2	0	0	2	1			1	2	3			
8:15 AM - 8:30 AM		0			0	1			1	0	0	1	0	0	1	1			1	1	3			
8:30 AM - 8:45 AM		0			0	0			0	1	0	1	0	0	2	1			1	2	3			
8:45 AM - 9:00 AM		0			0	0			0	0	0	0	0	0	0			0	0	0				
4:00 PM - 4:15 PM		0			0	2			2	1	1	1	0	0	3	1			1	3	6			
4:15 PM - 4:30 PM		1			1	0			0	2	1	3	0	0	6	3			3	7	10			
4:30 PM - 4:45 PM		1			1	1			1	2	0	5	0	0	7	2			2	8	11			
4:45 PM - 5:00 PM		2			2	2			2	0	1	0	0	0	1	2			2	3	7			
5:00 PM - 5:15 PM		1			1	2			2	0	0	1	0	0	1	1			1	2	5			
5:15 PM - 5:30 PM		0			0	3			3	2	2	2	0	0	6	4			4	6	13			
5:30 PM - 5:45 PM		1			1	2			2	1	2	1	0	0	4	1			1	5	8			
5:45 PM - 6:00 PM		2			2	3			3	1	1	4	0	0	6	3			3	8	14			
6:00 PM - 6:15 PM		2			2	1			1	4	1	5	0	0	10	4			4	12	17			
6:15 PM - 6:30 PM		1			1	2			2	3	1	2	0	0	6	2			2	7	11			
6:30 PM - 6:45 PM		0			0	2			2	0	2	2	0	0	4	2			2	4	8			
6:45 PM - 7:00 PM		1			1	1			1	1	0	2	0	0	3	1			1	4	6			
Total		0	13	0	0	13	0	0	23	0	23	19	12	33	0	64	32	0	0	0	32	77	55	132
One Hour Volumes																								
6:00 AM - 7:00 AM		0	1	0	0	1	0	0	0	0	0	0	0	0	1	1	0	0	0	1	2	1	3	
6:15 AM - 7:15 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	0	0	0	1	2	1	3	
6:30 AM - 7:30 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	2	1	2	1	3	
6:45 AM - 7:45 AM		0	0	0	0	0	0	0	0	1	0	0	0	0	2	0	0	0	2	2	2	4		
7:00 AM - 8:00 AM		0	0	0	0	0	0	0	1	0	0	1	0	0	1	2	0	0	0	2	1	3	4	
7:15 AM - 8:15 AM		0	0	0	0	0	0	0	1	0	0	2	0	0	2	3	0	0	0	3	2	4	6	
7:30 AM - 8:30 AM		0	0	0	0	0	0	0	2	0	0	2	0	0	3	3	0	0	0	3	3	5	8	
7:45 AM - 8:45 AM		0	0	0	0	0	0	0	2	0	2	0	0	0	5	3	0	0	0	3	5	5	10	
8:00 AM - 9:00 AM		0	0	0	0	0	0	0	1	0	0	1	0	0	5	3	0	0	0	3	5	4	9	
4:00 PM - 5:00 PM		0	4	0	0	4	0	0	5	0	5	0	0	0	17	8	0	0	0	8	21	13	34	
4:15 PM - 5:15 PM		0	5	0	0	5	0	0	5	0	5	0	0	0	15	8	0	0	0	8	20	13	33	
4:30 PM - 5:30 PM		0	4	0	0	4	0	0	8	0	8	0	0	0	15	9	0	0	0	9	19	17	36	
4:45 PM - 5:45 PM		0	4	0	0	4	0	0	9	0	9	0	0	0	12	8	0	0	0	8	16	17	33	
5:00 PM - 6:00 PM		0	4	0	0	4	0	0	10	0	10	0	0	0	17	9	0	0	0	9	21	19	40	
5:15 PM - 6:15 PM		0	5	0	0	5	0	0	9	0	9	0	0	0	26	12	0	0	0	12	31	21	52	
5:30 PM - 6:30 PM		0	6	0	0	6	0	0	8	0	8	0	0	0	26	10	0	0	0	10	32	18	50	
5:45 PM - 6:45 PM		0	5	0	0	5	0	0	8	0	8	0	0	0	26	11	0	0	0	11	31	19	50	
6:00 PM - 7:00 PM		0	4	0	0	4	0	0	6	0	6	0	0	0	23	9	0	0	0	9	27	15	42	

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Bicycles

Time Period		Southbound Eaton Place				Westbound Fairfax Boulevard - 50				Northbound Driveway				Eastbound Fairfax Boulevard - 50				North East & & Total				
		Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	South	West			
15 Minute Volumes																						
6:00 AM - 6:15 AM				1	1				0				0				0			1	0	1
6:15 AM - 6:30 AM					0			1	1				0				0			0	1	1
6:30 AM - 6:45 AM					0				0				0				0			0	0	0
6:45 AM - 7:00 AM					0				0				0				0			0	0	0
7:00 AM - 7:15 AM					0				0				0				0			0	0	0
7:15 AM - 7:30 AM					0				0				0				0			0	0	0
7:30 AM - 7:45 AM					0				0				0				0			0	0	0
7:45 AM - 8:00 AM					0				0				0				0			0	0	0
8:00 AM - 8:15 AM					0				0				0				0			0	0	0
8:15 AM - 8:30 AM					0				0				0				0			0	0	0
8:30 AM - 8:45 AM					0				0				0			1	1			0	1	1
8:45 AM - 9:00 AM					0				0				0				0			0	0	0
4:00 PM - 4:15 PM					0				0				0				0			0	0	0
4:15 PM - 4:30 PM					0				0				0			2	2			0	2	2
4:30 PM - 4:45 PM					0				0				0				0			0	0	0
4:45 PM - 5:00 PM					0				0				0				0			0	0	0
5:00 PM - 5:15 PM					0			1	1				0				0			0	1	1
5:15 PM - 5:30 PM					0			2	2				0			1	1			0	3	3
5:30 PM - 5:45 PM				1	1				0				0				0			1	0	1
5:45 PM - 6:00 PM					0				0				0				0			0	0	0
6:00 PM - 6:15 PM					0				0				0				0			0	0	0
6:15 PM - 6:30 PM					0				0				0				0			0	0	0
6:30 PM - 6:45 PM					0				0				0			3	3			0	3	3
6:45 PM - 7:00 PM					0			2	2				0				0			0	2	2
Total		0	0	2	2	0	6	0	6	0	0	0	0	0	7	0	7	2	13	15		
One Hour Volumes																						
6:00 AM - 7:00 AM		0	0	1	1	0	1	0	1	0	0	0	0	0	0	0	0	1	1	2		
6:15 AM - 7:15 AM		0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1		
6:30 AM - 7:30 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
6:45 AM - 7:45 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
7:00 AM - 8:00 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
7:15 AM - 8:15 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
7:30 AM - 8:30 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
7:45 AM - 8:45 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1		
8:00 AM - 9:00 AM		0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1		
4:00 PM - 5:00 PM		0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2		
4:15 PM - 5:15 PM		0	0	0	0	0	1	0	1	0	0	0	0	0	2	0	2	0	3	3		
4:30 PM - 5:30 PM		0	0	0	0	0	3	0	3	0	0	0	0	0	1	0	1	0	4	4		
4:45 PM - 5:45 PM		0	0	1	1	0	3	0	3	0	0	0	0	0	1	0	1	1	4	5		
5:00 PM - 6:00 PM		0	0	1	1	0	3	0	3	0	0	0	0	0	1	0	1	1	4	5		
5:15 PM - 6:15 PM		0	0	1	1	0	2	0	2	0	0	0	0	0	1	0	1	1	3	4		
5:30 PM - 6:30 PM		0	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1		
5:45 PM - 6:45 PM		0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3	0	3	3		
6:00 PM - 7:00 PM		0	0	0	0	0	2	0	2	0	0	0	0	0	3	0	3	0	5	5		

Wells + Associates, Inc.

Tysons, Virginia

Pedestrian Volume Survey

<p>PROJECT: Willowood Plaza W + A JOB NO: 8738 INTERSECTION: Fairfax Blvd. & Eaton Pl. LOCATION: Fairfax County, VA DATE: 5/3/2022 DAY: Tuesday WEATHER: clear COUNTED BY: James INPUTED BY: agan</p>	
--	--

Time Period	Movement								1+2	3+4	5+6	7+8	Total	
	1	2	3	4	5	6	7	8						
15 Minute Volumes														
6:00 AM - 6:15 AM		1								1	0	0	0	1
6:15 AM - 6:30 AM						2				0	0	2	0	2
6:30 AM - 6:45 AM					1	1				0	0	2	0	2
6:45 AM - 7:00 AM		1				3				1	0	3	0	4
7:00 AM - 7:15 AM						1				0	0	1	0	1
7:15 AM - 7:30 AM										0	0	0	0	0
7:30 AM - 7:45 AM										0	0	0	0	0
7:45 AM - 8:00 AM		1								1	0	0	0	1
8:00 AM - 8:15 AM										0	0	0	0	0
8:15 AM - 8:30 AM										0	0	0	0	0
8:30 AM - 8:45 AM						1				0	0	1	0	1
8:45 AM - 9:00 AM										0	0	0	0	0
4:00 PM - 4:15 PM						1				0	0	1	0	1
4:15 PM - 4:30 PM						1				0	0	1	0	1
4:30 PM - 4:45 PM										0	0	0	0	0
4:45 PM - 5:00 PM										0	0	0	0	0
5:00 PM - 5:15 PM										0	0	0	0	0
5:15 PM - 5:30 PM		1				4		2		1	0	4	2	7
5:30 PM - 5:45 PM					2		1			0	0	2	1	3
5:45 PM - 6:00 PM		2	2	1		1	1	2		4	1	1	3	9
6:00 PM - 6:15 PM										0	0	0	0	0
6:15 PM - 6:30 PM		1					2	2		1	0	0	4	5
6:30 PM - 6:45 PM			1			1		2		1	0	1	2	4
6:45 PM - 7:00 PM							2			0	0	0	2	2
Total		5	5	1	0	5	14	6	8	10	1	19	14	44
One Hour Volumes														
6:00 AM - 7:00 AM		1	1	0	0	1	6	0	0	2	0	7	0	9
6:15 AM - 7:15 AM		1	0	0	0	1	7	0	0	1	0	8	0	9
6:30 AM - 7:30 AM		1	0	0	0	1	5	0	0	1	0	6	0	7
6:45 AM - 7:45 AM		1	0	0	0	0	4	0	0	1	0	4	0	5
7:00 AM - 8:00 AM		1	0	0	0	0	1	0	0	1	0	1	0	2
7:15 AM - 8:15 AM		1	0	0	0	0	0	0	0	1	0	0	0	1
7:30 AM - 8:30 AM		1	0	0	0	0	0	0	0	1	0	0	0	1
7:45 AM - 8:45 AM		1	0	0	0	0	1	0	0	1	0	1	0	2
8:00 AM - 9:00 AM		0	0	0	0	0	1	0	0	0	0	1	0	1
4:00 PM - 5:00 PM		0	0	0	0	0	2	0	0	0	0	2	0	2
4:15 PM - 5:15 PM		0	0	0	0	0	1	0	0	0	0	1	0	1
4:30 PM - 5:30 PM		0	1	0	0	0	4	0	2	1	0	4	2	7
4:45 PM - 5:45 PM		0	1	0	0	2	4	1	2	1	0	6	3	10
5:00 PM - 6:00 PM		2	3	1	0	3	4	2	4	5	1	7	6	19
5:15 PM - 6:15 PM		2	3	1	0	3	4	2	4	5	1	7	6	19
5:30 PM - 6:30 PM		3	2	1	0	3	0	4	4	5	1	3	8	17
5:45 PM - 6:45 PM		3	3	1	0	2	0	3	6	6	1	2	9	18
6:00 PM - 7:00 PM		1	1	0	0	1	0	4	4	2	0	1	8	11

Wells + Associates, Inc

Tysons, Virginia

Turning Movement Count - Total Vehicles

PROJECT: Willowood Plaza	DATE: 5/3/2022	SOUTHBOUND ROAD: Mostwest Site Driveway 2
W+A JOB NO: 8738	DAY: Tuesday	NORTHBOUND ROAD: Office Driveway
INTERSECTION: Eaton Pl. & Mostwest Site Driveway	WEATHER: clear	WESTBOUND ROAD: Eaton Place
LOCATION: Fairfax County, VA	COUNTED BY: Agan	EASTBOUND ROAD: Eaton Place
	INPUTED BY: agan	

Time Period	Southbound Mostwest Site Driveway 2					Westbound Eaton Place					Northbound Office Driveway					Eastbound Eaton Place					North East & & Total						
	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	South	West	Total
15 Minute Volumes																											
6:00 AM - 6:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	1	0	1		1	0	2	0	3		1	3	4
6:15 AM - 6:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	3	0	3		0	3	3
6:30 AM - 6:45 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	4	0	4		0	4	4
6:45 AM - 7:00 AM	1	0	0	0	1		0	0	0	0	0		0	0	0	0	0		0	0	10	0	10		1	10	11
7:00 AM - 7:15 AM	1	0	0	0	1		2	0	0	0	2		0	0	0	0	0		0	0	4	0	4		1	6	7
7:15 AM - 7:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	12	0	12		0	12	12
7:30 AM - 7:45 AM	1	0	0	0	1		0	0	0	0	0		0	0	0	0	0		0	0	17	0	17		1	17	18
7:45 AM - 8:00 AM	1	0	0	0	1		0	0	0	0	0		0	0	0	0	0		1	0	17	0	18		1	18	19
8:00 AM - 8:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		2	0	17	0	19		0	19	19
8:15 AM - 8:30 AM	1	0	0	0	1		2	0	0	0	2		0	0	0	0	0		0	0	28	0	28		1	30	31
8:30 AM - 8:45 AM	0	0	0	0	0		4	0	0	0	4		0	0	0	0	0		0	0	20	0	20		0	24	24
8:45 AM - 9:00 AM	2	0	1	0	3		4	0	0	0	4		0	0	0	0	0		0	0	25	0	25		3	29	32
4:00 PM - 4:15 PM	16	0	4	0	20		0	0	0	0	0		0	0	0	0	0		0	0	5	0	5		20	5	25
4:15 PM - 4:30 PM	16	0	2	0	18		3	0	0	0	3		0	0	0	0	0		1	0	2	0	3		18	6	24
4:30 PM - 4:45 PM	15	0	6	0	21		1	0	0	0	1		1	0	0	0	1		0	0	4	0	4		22	5	27
4:45 PM - 5:00 PM	12	0	3	0	15		1	0	0	0	1		0	0	0	0	0		0	0	3	0	3		15	4	19
5:00 PM - 5:15 PM	16	0	3	0	19		1	0	0	0	1		0	0	0	0	0		0	0	0	0	0		19	1	20
5:15 PM - 5:30 PM	16	1	2	0	19		1	0	0	0	1		0	0	0	0	0		0	0	1	0	1		19	2	21
5:30 PM - 5:45 PM	11	0	1	0	12		1	0	0	0	1		0	0	0	0	0		0	0	0	0	0		12	1	13
5:45 PM - 6:00 PM	11	0	3	0	14		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		14	0	14
6:00 PM - 6:15 PM	5	0	0	0	5		0	0	0	0	0		0	0	0	0	0		0	0	2	0	2		5	2	7
6:15 PM - 6:30 PM	9	0	1	0	10		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		10	0	10
6:30 PM - 6:45 PM	6	0	0	0	6		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		6	0	6
6:45 PM - 7:00 PM	4	0	1	0	5		0	0	0	0	0		0	0	0	0	0		0	0	1	0	1		5	1	6
4:00 AM - 4:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:15 AM - 4:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:30 AM - 4:45 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:45 AM - 5:00 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:00 AM - 5:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:15 AM - 5:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:30 AM - 5:45 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:45 AM - 6:00 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
Total	144	1	27	0	172		20	0	0	0	20		1	0	1	0	2		5	0	177	0	182		174	202	376
One Hour Volumes																											
6:00 AM - 7:00 AM	1	0	0	0	1	0.25	0	0	0	0	0		0	0	1	0	1	0.25	1	0	19	0	20	0.5	2	20	22
6:15 AM - 7:15 AM	2	0	0	0	2	0.5	2	0	0	0	2	0.25	0	0	0	0	0		0	0	21	0	21	0.53	2	23	25
6:30 AM - 7:30 AM	2	0	0	0	2	0.5	2	0	0	0	2	0.25	0	0	0	0	0		0	0	30	0	30	0.63	2	32	34
6:45 AM - 7:45 AM	3	0	0	0	3	0.75	2	0	0	0	2	0.25	0	0	0	0	0		0	0	43	0	43	0.63	3	45	48
7:00 AM - 8:00 AM	3	0	0	0	3	0.75	2	0	0	0	2	0.25	0	0	0	0	0		1	0	50	0	51	0.71	3	53	56
7:15 AM - 8:15 AM	2	0	0	0	2	0.5	0	0	0	0	0		0	0	0	0	0		3	0	63	0	66	0.87	2	66	68
7:30 AM - 8:30 AM	3	0	0	0	3	0.75	2	0	0	0	2	0.25	0	0	0	0	0		3	0	79	0	82	0.73	3	84	87
7:45 AM - 8:45 AM	2	0	0	0	2	0.5	6	0	0	0	6	0.38	0	0	0	0	0		3	0	82	0	85	0.76	2	91	93
8:00 AM - 9:00 AM	3	0	1	0	4	0.33	10	0	0	0	10	0.63	0	0	0	0	0		2	0	90	0	92	0.82	4	102	106
4:00 PM - 5:00 PM	59	0	15	0	74	0.88	5	0	0	0	5	0.42	1	0	0	0	1	0.25	1	0	14	0	15	0.75	75	20	95
4:15 PM - 5:15 PM	59	0	14	0	73	0.87	6	0	0	0	6	0.5	1	0	0	0	1	0.25	1	0	9	0	10	0.63	74	16	90
4:30 PM - 5:30 PM	59	1	14	0	74	0.88	4	0	0	0	4	1	1	0	0	0	1	0.25	0	0	8	0	8	0.5	75	12	87
4:45 PM - 5:45 PM	55	1	9	0	65	0.86	4	0	0	0	4	1	0	0	0	0	0		0	0	4	0	4	0.33	65	8	73
5:00 PM - 6:00 PM	54	1	9	0	64	0.84	3	0	0	0	3	0.75	0	0	0	0	0		0	0	1	0	1	0.25	64	4	68
5:15 PM - 6:15 PM	43	1	6	0	50	0.66	2	0	0	0	2	0.5	0	0	0	0	0		0	0	3	0	3	0.38	50	5	55
5:30 PM - 6:30 PM	36	0	5	0	41	0.73	1	0	0	0	1	0.25	0	0	0	0	0		0	0	2	0	2	0.25	41	3	44
5:45 PM - 6:45 PM	31	0	4	0	35	0.63	0	0	0	0	0		0	0	0	0	0		0	0	2	0	2	0.25	35	2	37
6:00 PM - 7:00 PM	24	0	2	0	26	0.65	0	0	0	0	0		0	0	0	0	0		0	0	3	0	3	0.38	26	3	29

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Bicycles

PROJECT: Willowwood Plaza		DATE: 5/3/2022		SOUTHBOUND ROAD: Mostwest Site Driveway 2															
W+A JOB NO: 8738		DAY: Tuesday		NORTHBOUND ROAD: Office Driveway															
INTERSECTION: Eaton Pl. & Mostwest Site Driveway 2		WEATHER: clear		WESTBOUND ROAD: Eaton Place															
LOCATION: Fairfax County, VA		COUNTED BY: Agan		EASTBOUND ROAD: Eaton Place															
INPUTED BY: agan																			
Time Period	Southbound Mostwest Site Driveway 2				Westbound Eaton Place				Northbound Office Driveway				Eastbound Eaton Place				North East & & Total		
	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	South	West	
15 Minute Volumes																			
6:00 AM - 6:15 AM				0				0				0				0	0	0	0
6:15 AM - 6:30 AM				0				0				0				0	0	0	0
6:30 AM - 6:45 AM				0				0				0				0	0	0	0
6:45 AM - 7:00 AM				0			1	1				0				0	0	1	1
7:00 AM - 7:15 AM				0				0				0				0	0	0	0
7:15 AM - 7:30 AM				0				0				0				0	0	0	0
7:30 AM - 7:45 AM				0				0				0			1	1	0	1	1
7:45 AM - 8:00 AM				0				0				0			1	1	0	1	1
8:00 AM - 8:15 AM				0				0				0				0	0	0	0
8:15 AM - 8:30 AM				0				0				0				0	0	0	0
8:30 AM - 8:45 AM				0				0				0				0	0	0	0
8:45 AM - 9:00 AM				0				0				0				0	0	0	0
4:00 PM - 4:15 PM				0				0				0				0	0	0	0
4:15 PM - 4:30 PM				0				0				0				0	0	0	0
4:30 PM - 4:45 PM				0			1	1				0				0	0	1	1
4:45 PM - 5:00 PM				0				0				0				0	0	0	0
5:00 PM - 5:15 PM				0				0				0				0	0	0	0
5:15 PM - 5:30 PM				0			1	1				0				0	0	1	1
5:30 PM - 5:45 PM				0				0				0				0	0	0	0
5:45 PM - 6:00 PM				0				0				0				0	0	0	0
6:00 PM - 6:15 PM				0				0				0				0	0	0	0
6:15 PM - 6:30 PM				0				0				0				0	0	0	0
6:30 PM - 6:45 PM				0				0				0				0	0	0	0
6:45 PM - 7:00 PM				0				0				0				0	0	0	0
Total	0	0	0	0	0	3	0	3	0	0	0	0	0	0	2	2	0	5	5
One Hour Volumes																			
6:00 AM - 7:00 AM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
6:15 AM - 7:15 AM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
6:30 AM - 7:30 AM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
6:45 AM - 7:45 AM	0	0	0	0	0	1	0	1	0	0	0	0	0	1	0	1	0	2	2
7:00 AM - 8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2
7:15 AM - 8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2
7:30 AM - 8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2
7:45 AM - 8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
8:00 AM - 9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM - 5:00 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
4:15 PM - 5:15 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
4:30 PM - 5:30 PM	0	0	0	0	0	2	0	2	0	0	0	0	0	0	0	0	0	2	2
4:45 PM - 5:45 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
5:00 PM - 6:00 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
5:15 PM - 6:15 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1
5:30 PM - 6:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:45 PM - 6:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:00 PM - 7:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Wells + Associates, Inc.

Tysons, Virginia

Pedestrian Volume Survey

<p>PROJECT: Willowood Plaza W + A JOB NO: 8738 INTERSECTION: Eaton Pl. & Mostwest Site Driveway LOCATION: Fairfax County, VA DATE: 5/3/2022 DAY: Tuesday WEATHER: clear COUNTED BY: Agan INPUTED BY: agan</p>	
--	--

Time Period	Movement								1+2	3+4	5+6	7+8	Total	
	1	2	3	4	5	6	7	8						
15 Minute Volumes														
6:00 AM - 6:15 AM		1								1	0	0	0	1
6:15 AM - 6:30 AM								1		0	0	1	0	1
6:30 AM - 6:45 AM				1				1		0	1	1	0	2
6:45 AM - 7:00 AM			1		1			1		1	1	1	0	3
7:00 AM - 7:15 AM						1				0	0	1	0	1
7:15 AM - 7:30 AM	1									1	0	0	0	1
7:30 AM - 7:45 AM								1		0	0	1	0	1
7:45 AM - 8:00 AM										0	0	0	0	0
8:00 AM - 8:15 AM				1		1				0	1	1	0	2
8:15 AM - 8:30 AM										0	0	0	0	0
8:30 AM - 8:45 AM										0	0	0	0	0
8:45 AM - 9:00 AM										0	0	0	0	0
4:00 PM - 4:15 PM								1		0	0	1	0	1
4:15 PM - 4:30 PM	1			1						1	1	0	0	2
4:30 PM - 4:45 PM	1					2				1	0	2	0	3
4:45 PM - 5:00 PM		2								2	0	0	0	2
5:00 PM - 5:15 PM	1					1				1	0	1	0	2
5:15 PM - 5:30 PM		1				1				1	0	1	0	2
5:30 PM - 5:45 PM		2	1	1	1	2	2			2	2	4	0	8
5:45 PM - 6:00 PM		1					2			1	0	2	0	3
6:00 PM - 6:15 PM	4	2		3	1					6	3	1	0	10
6:15 PM - 6:30 PM	2	5		1	1					7	1	1	0	9
6:30 PM - 6:45 PM	1	2	1				1			3	1	1	0	5
6:45 PM - 7:00 PM	1	1								2	0	0	0	2
Total		12	18	4	7	10	10	0	0	30	11	20	0	61
One Hour Volumes														
6:00 AM - 7:00 AM		0	2	1	1	0	3	0	0	2	2	3	0	7
6:15 AM - 7:15 AM		0	1	1	1	1	3	0	0	1	2	4	0	7
6:30 AM - 7:30 AM		1	1	1	1	1	2	0	0	2	2	3	0	7
6:45 AM - 7:45 AM		1	1	0	1	1	2	0	0	2	1	3	0	6
7:00 AM - 8:00 AM		1	0	0	0	1	1	0	0	1	0	2	0	3
7:15 AM - 8:15 AM		1	0	0	1	1	1	0	0	1	1	2	0	4
7:30 AM - 8:30 AM		0	0	0	1	1	1	0	0	0	1	2	0	3
7:45 AM - 8:45 AM		0	0	0	1	1	0	0	0	0	1	1	0	2
8:00 AM - 9:00 AM		0	0	0	1	1	0	0	0	0	1	1	0	2
4:00 PM - 5:00 PM		2	2	1	0	2	1	0	0	4	1	3	0	8
4:15 PM - 5:15 PM		3	2	1	0	3	0	0	0	5	1	3	0	9
4:30 PM - 5:30 PM		2	3	0	0	4	0	0	0	5	0	4	0	9
4:45 PM - 5:45 PM		1	5	1	1	4	2	0	0	6	2	6	0	14
5:00 PM - 6:00 PM		1	4	1	1	4	4	0	0	5	2	8	0	15
5:15 PM - 6:15 PM		4	6	1	4	4	4	0	0	10	5	8	0	23
5:30 PM - 6:30 PM		6	10	1	5	4	4	0	0	16	6	8	0	30
5:45 PM - 6:45 PM		7	10	1	4	2	3	0	0	17	5	5	0	27
6:00 PM - 7:00 PM		8	10	1	4	2	1	0	0	18	5	3	0	26

Wells + Associates, Inc

Tysons, Virginia

Turning Movement Count - Total Vehicles

PROJECT: Willowood Plaza	DATE: 11/16/2022	SOUTHBOUND ROAD: Driveway
W+A JOB NO: 8738	DAY: Wednesday	NORTHBOUND ROAD: University Boulevard Extension
INTERSECTION: Eaton Pl. & University Blvd. Extension	WEATHER: clear	WESTBOUND ROAD: Eaton Place
LOCATION: Fairfax County, VA	COUNTED BY: Majda agan	EASTBOUND ROAD: Eaton Place
INPUTED BY: agan		

Time Period	Southbound Driveway					Westbound Eaton Place					Northbound University Boulevard Extension					Eastbound Eaton Place					North & South	East & West	Total
	Right	Thru	Left/Turn	Total	PHF	Right	Thru	Left/Turn	Total	PHF	Right	Thru	Left/Turn	Total	PHF	Right	Thru	Left/Turn	Total	PHF			
15 Minute Volumes																							
6:00 AM - 6:15 AM	0	0	0	0	0	0	16	0	0	16	0	0	0	0	0	2	21	4	0	27	0	43	43
6:15 AM - 6:30 AM	0	0	0	0	0	0	17	0	0	17	0	0	0	0	0	1	32	1	0	34	0	51	51
6:30 AM - 6:45 AM	0	0	0	0	0	0	25	0	0	25	0	0	1	0	1	3	36	6	0	45	1	70	71
6:45 AM - 7:00 AM	0	0	0	0	0	1	22	0	0	23	0	0	0	0	0	4	52	13	0	69	0	92	92
7:00 AM - 7:15 AM	0	0	0	0	0	0	26	0	0	26	0	0	4	0	4	1	40	12	0	53	4	79	83
7:15 AM - 7:30 AM	2	0	0	0	2	2	30	0	0	32	0	0	2	0	2	2	67	1	0	70	4	102	106
7:30 AM - 7:45 AM	0	0	0	0	0	2	62	1	0	65	1	0	2	0	3	7	80	10	0	97	3	162	165
7:45 AM - 8:00 AM	0	0	0	0	0	2	58	0	0	60	0	2	1	0	3	1	94	15	0	110	3	170	173
8:00 AM - 8:15 AM	0	0	0	0	0	0	66	0	0	66	2	1	3	0	6	1	73	19	0	93	6	159	165
8:15 AM - 8:30 AM	0	0	0	0	0	2	59	2	0	63	0	1	0	0	1	4	53	12	0	69	1	132	133
8:30 AM - 8:45 AM	0	0	0	0	0	1	60	0	0	61	1	1	4	0	6	2	76	13	0	91	6	152	158
8:45 AM - 9:00 AM	1	1	0	0	2	2	40	1	0	43	1	3	4	0	8	10	78	18	0	106	10	149	159
4:00 PM - 4:15 PM	13	1	1	0	15	1	127	0	0	128	1	0	7	0	8	7	75	0	0	82	23	210	233
4:15 PM - 4:30 PM	11	1	4	0	16	0	138	2	0	140	0	0	5	0	5	6	62	1	0	69	21	209	230
4:30 PM - 4:45 PM	11	0	1	0	12	0	136	3	0	139	3	0	1	0	4	4	68	0	0	72	16	211	227
4:45 PM - 5:00 PM	11	0	0	0	11	0	105	3	0	108	2	1	2	0	5	8	58	0	0	66	16	174	190
5:00 PM - 5:15 PM	11	0	1	0	12	0	137	2	0	139	0	0	1	0	1	7	67	1	0	75	13	214	227
5:15 PM - 5:30 PM	11	0	0	0	11	0	140	2	0	142	2	0	5	0	7	3	61	1	0	65	18	207	225
5:30 PM - 5:45 PM	5	0	0	0	5	0	130	1	0	131	1	1	5	0	7	8	55	0	0	63	12	194	206
5:45 PM - 6:00 PM	16	0	0	0	16	0	99	2	0	101	0	0	7	0	7	6	71	1	0	78	23	179	202
6:00 PM - 6:15 PM	5	2	0	0	7	0	111	4	0	115	1	1	6	0	8	7	67	0	0	74	15	189	204
6:15 PM - 6:30 PM	10	0	0	0	10	0	98	0	0	98	2	0	5	0	7	4	76	0	0	80	17	178	195
6:30 PM - 6:45 PM	4	1	0	0	5	0	101	0	0	101	0	1	3	0	4	1	55	0	0	56	9	157	166
6:45 PM - 7:00 PM	4	0	0	0	4	0	63	0	0	63	0	0	2	0	2	1	58	0	0	59	6	122	128
4:00 AM - 4:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:15 AM - 4:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:30 AM - 4:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:45 AM - 5:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:00 AM - 5:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:15 AM - 5:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:30 AM - 5:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:45 AM - 6:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	115	6	7	0	128	13	1866	23	0	1902	17	12	70	0	99	100	1475	128	0	1703	227	3605	3832

One Hour Volumes																											
Time Period	Right	Thru	Left/Turn	Total	PHF	Right	Thru	Left/Turn	Total	PHF	Right	Thru	Left/Turn	Total	PHF	Right	Thru	Left/Turn	Total	PHF	North & South	East & West	Total				
6:00 AM - 7:00 AM	0	0	0	0	0	1	80	0	0	81	0.81	0	0	1	0	1	0.25	10	141	24	0	175	0.63	1	256	257	
6:15 AM - 7:15 AM	0	0	0	0	0	1	90	0	0	91	0.88	0	0	5	0	5	0.31	9	160	32	0	201	0.73	5	292	297	
6:30 AM - 7:30 AM	2	0	0	0	2	0.25	3	103	0	0	106	0.83	0	0	7	0	7	0.44	10	195	32	0	237	0.85	9	343	352
6:45 AM - 7:45 AM	2	0	0	0	2	0.25	5	140	1	0	146	0.56	1	0	8	0	9	0.56	14	239	36	0	289	0.74	11	435	446
7:00 AM - 8:00 AM	2	0	0	0	2	0.25	6	176	1	0	183	0.7	1	2	9	0	12	0.75	11	281	38	0	330	0.75	14	513	527
7:15 AM - 8:15 AM	2	0	0	0	2	0.25	6	216	1	0	223	0.84	3	3	8	0	14	0.58	11	314	45	0	370	0.84	16	593	609
7:30 AM - 8:30 AM	0	0	0	0	0	6	245	3	0	254	0.96	3	4	6	0	13	0.54	13	300	56	0	369	0.84	13	623	636	
7:45 AM - 8:45 AM	0	0	0	0	0	5	243	2	0	250	0.95	3	5	8	0	16	0.67	8	296	59	0	363	0.83	16	613	629	
8:00 AM - 9:00 AM	1	1	0	0	2	0.25	5	225	3	0	233	0.88	4	6	11	0	21	0.66	17	280	62	0	359	0.85	23	592	615
4:00 PM - 5:00 PM	46	2	6	0	54	0.84	1	506	8	0	515	0.92	6	1	15	0	22	0.69	25	263	1	0	289	0.88	76	804	880
4:15 PM - 5:15 PM	44	1	6	0	51	0.8	0	516	10	0	526	0.94	5	1	9	0	15	0.75	25	255	2	0	282	0.94	66	808	874
4:30 PM - 5:30 PM	44	0	2	0	46	0.96	0	518	10	0	528	0.93	7	1	9	0	17	0.61	22	254	2	0	278	0.93	63	806	869
4:45 PM - 5:45 PM	38	0	1	0	39	0.81	0	512	8	0	520	0.92	5	2	13	0	20	0.71	26	241	2	0	269	0.9	59	789	848
5:00 PM - 6:00 PM	43	0	1	0	44	0.69	0	506	7	0	513	0.9	3	1	18	0	22	0.79	24	254	3	0	281	0.9	66	794	860
5:15 PM - 6:15 PM	37	2	0	0	39	0.61	0	480	9	0	489	0.86	4	2	23	0	29	0.91	24	254	2	0	280	0.9	68	769	837
5:30 PM - 6:30 PM	36	2	0	0	38	0.59	0	438	7	0	445	0.85	4	2	23	0	29	0.91	25	269	1	0	295	0.92	67	740	807
5:45 PM - 6:45 PM	35	3	0	0	38	0.59	0	409	6	0	415	0.9	3	2	21	0	26	0.81	18	269	1	0	288	0.9	64	703	767
6:00 PM - 7:00 PM	23	3	0	0	26	0.65	0	373	4	0	377	0.82	3	2	16	0	21	0.66	13	256	0	0	269	0.84	47	646	693

Wells + Associates, Inc

Tysons, Virginia

Turning Movement Count - Total Vehicles

PROJECT: Willowood Plaza	DATE: 5/3/2022	SOUTHBOUND ROAD: West Site Driveway
W+A JOB NO: 8738	DAY: Tuesday	NORTHBOUND ROAD: Office Driveway
INTERSECTION: Eaton Pl. & West Site Driveway	WEATHER: clear	WESTBOUND ROAD: Eaton Place
LOCATION: Fairfax County, VA	COUNTED BY: Agan	EASTBOUND ROAD: Eaton Place
	INPUTED BY: agan	

Time Period	Southbound West Site Driveway					Westbound Eaton Place					Northbound Office Driveway					Eastbound Eaton Place					North South	East West	Total		
	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF					
15 Minute Volumes																									
6:00 AM - 6:15 AM	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1
6:15 AM - 6:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	0	1	1
6:30 AM - 6:45 AM	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1	1	2
6:45 AM - 7:00 AM	0	0	0	0	0	2	0	0	0	2	0	0	0	0	0	0	1	0	1	0	1	0	3	3	3
7:00 AM - 7:15 AM	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1
7:15 AM - 7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	0	2	2	2
7:30 AM - 7:45 AM	0	0	0	0	0	3	0	0	0	3	0	0	0	0	0	0	2	0	2	0	2	0	5	5	5
7:45 AM - 8:00 AM	0	0	0	0	0	4	0	0	0	4	0	0	0	0	0	0	4	0	4	0	4	0	8	8	8
8:00 AM - 8:15 AM	0	0	0	0	0	2	0	0	0	2	0	0	0	0	0	0	2	0	2	0	2	0	4	4	4
8:15 AM - 8:30 AM	0	0	0	0	0	5	0	0	0	5	0	0	0	0	0	0	4	0	4	0	4	0	9	9	9
8:30 AM - 8:45 AM	3	0	1	0	4	6	0	0	0	6	0	0	0	0	0	3	0	3	0	3	0	4	9	13	13
8:45 AM - 9:00 AM	1	0	0	0	1	9	0	0	0	9	0	0	0	0	0	4	0	4	0	4	0	13	14	14	
4:00 PM - 4:15 PM	7	0	5	0	12	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	12	0	12	
4:15 PM - 4:30 PM	8	0	1	0	9	1	0	0	0	1	0	0	0	0	0	1	0	1	0	1	0	9	2	11	
4:30 PM - 4:45 PM	7	0	3	0	10	1	0	0	0	1	0	0	0	0	0	2	0	2	0	2	0	10	3	13	
4:45 PM - 5:00 PM	8	0	3	0	11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	11	0	11	
5:00 PM - 5:15 PM	9	0	7	0	16	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	16	0	16	
5:15 PM - 5:30 PM	5	0	4	0	9	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	0	9	1	10	
5:30 PM - 5:45 PM	2	0	3	0	5	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	0	5	2	7	
5:45 PM - 6:00 PM	1	0	1	0	2	0	0	0	0	0	0	0	0	0	0	3	0	3	0	3	0	2	3	5	
6:00 PM - 6:15 PM	7	0	2	0	9	1	0	0	0	1	0	0	0	0	0	1	0	1	0	1	0	9	2	11	
6:15 PM - 6:30 PM	5	0	1	0	6	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	6	1	7	
6:30 PM - 6:45 PM	0	0	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	
6:45 PM - 7:00 PM	2	0	0	0	2	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	0	2	2	4	
4:00 AM - 4:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4:15 AM - 4:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4:30 AM - 4:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
4:45 AM - 5:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5:00 AM - 5:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5:15 AM - 5:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5:30 AM - 5:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
5:45 AM - 6:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
Total	65	0	33	0	98	37	0	0	0	37	0	0	0	0	0	0	36	0	36	0	98	73	171		
One Hour Volumes																									
6:00 AM - 7:00 AM	0	0	1	0	1	0.25	3	0	0	0	3	0.38	0	0	0	0	0	3	0	3	0.75	1	6	7	
6:15 AM - 7:15 AM	0	0	1	0	1	0.25	3	0	0	0	3	0.38	0	0	0	0	0	3	0	3	0.75	1	6	7	
6:30 AM - 7:30 AM	0	0	1	0	1	0.25	3	0	0	0	3	0.38	0	0	0	0	0	4	0	4	0.5	1	7	8	
6:45 AM - 7:45 AM	0	0	0	0	0		6	0	0	0	6	0.5	0	0	0	0	0	5	0	5	0.63	0	11	11	
7:00 AM - 8:00 AM	0	0	0	0	0		8	0	0	0	8	0.5	0	0	0	0	0	8	0	8	0.5	0	16	16	
7:15 AM - 8:15 AM	0	0	0	0	0		9	0	0	0	9	0.56	0	0	0	0	0	10	0	10	0.63	0	19	19	
7:30 AM - 8:30 AM	0	0	0	0	0		14	0	0	0	14	0.7	0	0	0	0	0	12	0	12	0.75	0	26	26	
7:45 AM - 8:45 AM	3	0	1	0	4	0.25	17	0	0	0	17	0.71	0	0	0	0	0	13	0	13	0.81	4	30	34	
8:00 AM - 9:00 AM	4	0	1	0	5	0.31	22	0	0	0	22	0.61	0	0	0	0	0	13	0	13	0.81	5	35	40	
4:00 PM - 5:00 PM	30	0	12	0	42	0.88	2	0	0	0	2	0.5	0	0	0	0	0	3	0	3	0.38	42	5	47	
4:15 PM - 5:15 PM	32	0	14	0	46	0.72	2	0	0	0	2	0.5	0	0	0	0	0	3	0	3	0.38	46	5	51	
4:30 PM - 5:30 PM	29	0	17	0	46	0.72	1	0	0	0	1	0.25	0	0	0	0	0	3	0	3	0.38	46	4	50	
4:45 PM - 5:45 PM	24	0	17	0	41	0.64	0	0	0	0	0	0.64	0	0	0	0	0	3	0	3	0.38	41	3	44	
5:00 PM - 6:00 PM	17	0	15	0	32	0.5	0	0	0	0	0	0.5	0	0	0	0	0	6	0	6	0.5	32	6	38	
5:15 PM - 6:15 PM	15	0	10	0	25	0.69	1	0	0	0	1	0.25	0	0	0	0	0	7	0	7	0.58	25	8	33	
5:30 PM - 6:30 PM	15	0	7	0	22	0.61	2	0	0	0	2	0.5	0	0	0	0	0	6	0	6	0.5	22	8	30	
5:45 PM - 6:45 PM	13	0	5	0	18	0.5	2	0	0	0	2	0.5	0	0	0	0	0	4	0	4	0.33	18	6	24	
6:00 PM - 7:00 PM	14	0	4	0	18	0.5	2	0	0	0	2	0.5	0	0	0	0	0	3	0	3	0.38	18	5	23	

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Bicycles

Time Period		Southbound West Site Driveway				Westbound Eaton Place				Northbound Office Driveway				Eastbound Eaton Place				North East & & Total		
		Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	South	West	
15 Minute Volumes																				
6:00 AM - 6:15 AM				0				0				0						0	0	0
6:15 AM - 6:30 AM				0				0				0						0	0	0
6:30 AM - 6:45 AM				0				0				0						0	0	0
6:45 AM - 7:00 AM				0				1				0						0	0	1
7:00 AM - 7:15 AM				0				0				0						0	0	0
7:15 AM - 7:30 AM				0				0				0						0	0	0
7:30 AM - 7:45 AM				0				0				0						1	0	1
7:45 AM - 8:00 AM				0				0				0						1	0	1
8:00 AM - 8:15 AM				0				0				0						0	0	0
8:15 AM - 8:30 AM				0				0				0						0	0	0
8:30 AM - 8:45 AM				0				0				0						0	0	0
8:45 AM - 9:00 AM				0				0				0						0	0	0
4:00 PM - 4:15 PM				0				0				0						0	0	0
4:15 PM - 4:30 PM				0				0				0						0	0	0
4:30 PM - 4:45 PM				0				1				0						0	0	1
4:45 PM - 5:00 PM				0				0				0						0	0	0
5:00 PM - 5:15 PM				0				0				0						0	0	0
5:15 PM - 5:30 PM				1				0				0						0	1	0
5:30 PM - 5:45 PM				0				0				0						0	0	0
5:45 PM - 6:00 PM				0				0				0						0	0	0
6:00 PM - 6:15 PM				0				0				0						0	0	0
6:15 PM - 6:30 PM				0				0				0						0	0	0
6:30 PM - 6:45 PM				0				0				0						0	0	0
6:45 PM - 7:00 PM				0				0				0						0	0	0
Total				1				0				2						0	2	0
One Hour Volumes																				
6:00 AM - 7:00 AM				0				0				0						0	0	0
6:15 AM - 7:15 AM				0				0				0						0	0	0
6:30 AM - 7:30 AM				0				0				0						0	0	0
6:45 AM - 7:45 AM				0				0				0						0	1	0
7:00 AM - 8:00 AM				0				0				0						0	2	0
7:15 AM - 8:15 AM				0				0				0						0	2	0
7:30 AM - 8:30 AM				0				0				0						0	2	0
7:45 AM - 8:45 AM				0				0				0						0	1	0
8:00 AM - 9:00 AM				0				0				0						0	0	0
4:00 PM - 5:00 PM				0				0				0						0	0	0
4:15 PM - 5:15 PM				0				0				0						0	0	0
4:30 PM - 5:30 PM				1				0				0						0	0	0
4:45 PM - 5:45 PM				1				0				0						0	0	0
5:00 PM - 6:00 PM				1				0				0						0	0	0
5:15 PM - 6:15 PM				1				0				0						0	0	0
5:30 PM - 6:30 PM				0				0				0						0	0	0
5:45 PM - 6:45 PM				0				0				0						0	0	0
6:00 PM - 7:00 PM				0				0				0						0	0	0

Wells + Associates, Inc.

Tysons, Virginia

Pedestrian Volume Survey

PROJECT: Willowwood Plaza W + A JOB NO: 8738 INTERSECTION: Eaton Pl. & West Site Driveway LOCATION: Fairfax County, VA DATE: 5/3/2022 DAY: Tuesday WEATHER: clear COUNTED BY: Agan INPUTED BY: agan													
Time Period	Movement												Total
	1	2	3	4	5	6	7	8	1+2	3+4	5+6	7+8	
15 Minute Volumes													
6:00 AM - 6:15 AM		1							1	0	0	0	1
6:15 AM - 6:30 AM							1		0	0	1	0	1
6:30 AM - 6:45 AM							1		0	0	1	0	1
6:45 AM - 7:00 AM	2								2	0	0	0	2
7:00 AM - 7:15 AM					1				0	0	1	0	1
7:15 AM - 7:30 AM	1								1	0	0	0	1
7:30 AM - 7:45 AM							1		0	0	1	0	1
7:45 AM - 8:00 AM									0	0	0	0	0
8:00 AM - 8:15 AM	1								1	0	0	0	1
8:15 AM - 8:30 AM									0	0	0	0	0
8:30 AM - 8:45 AM									0	0	0	0	0
8:45 AM - 9:00 AM									0	0	0	0	0
4:00 PM - 4:15 PM									0	0	0	0	0
4:15 PM - 4:30 PM							1		0	0	1	0	1
4:30 PM - 4:45 PM					2				0	0	2	0	2
4:45 PM - 5:00 PM		1					1		1	0	1	1	3
5:00 PM - 5:15 PM					1				0	0	1	1	2
5:15 PM - 5:30 PM		1							1	0	0	0	1
5:30 PM - 5:45 PM	1	3					2		4	0	2	0	6
5:45 PM - 6:00 PM		1					2		1	0	2	0	3
6:00 PM - 6:15 PM	1				2			2	1	0	2	2	5
6:15 PM - 6:30 PM	3	5							8	0	0	0	8
6:30 PM - 6:45 PM		3			1			1	3	0	1	1	5
6:45 PM - 7:00 PM	1	1							2	0	0	0	2
Total	10	16	0	0	7	9	4	1	26	0	16	5	47
One Hour Volumes													
6:00 AM - 7:00 AM	2	1	0	0	0	2	0	0	3	0	2	0	5
6:15 AM - 7:15 AM	2	0	0	0	1	2	0	0	2	0	3	0	5
6:30 AM - 7:30 AM	3	0	0	0	1	1	0	0	3	0	2	0	5
6:45 AM - 7:45 AM	3	0	0	0	1	1	0	0	3	0	2	0	5
7:00 AM - 8:00 AM	1	0	0	0	1	1	0	0	1	0	2	0	3
7:15 AM - 8:15 AM	2	0	0	0	0	1	0	0	2	0	1	0	3
7:30 AM - 8:30 AM	1	0	0	0	0	1	0	0	1	0	1	0	2
7:45 AM - 8:45 AM	1	0	0	0	0	0	0	0	1	0	0	0	1
8:00 AM - 9:00 AM	1	0	0	0	0	0	0	0	1	0	0	0	1
4:00 PM - 5:00 PM	0	1	0	0	2	2	0	1	1	0	4	1	6
4:15 PM - 5:15 PM	0	1	0	0	3	2	1	1	1	0	5	2	8
4:30 PM - 5:30 PM	0	2	0	0	3	1	1	1	2	0	4	2	8
4:45 PM - 5:45 PM	1	5	0	0	1	3	1	1	6	0	4	2	12
5:00 PM - 6:00 PM	1	5	0	0	1	4	1	0	6	0	5	1	12
5:15 PM - 6:15 PM	2	5	0	0	2	4	2	0	7	0	6	2	15
5:30 PM - 6:30 PM	5	9	0	0	2	4	2	0	14	0	6	2	22
5:45 PM - 6:45 PM	4	9	0	0	3	2	3	0	13	0	5	3	21
6:00 PM - 7:00 PM	5	9	0	0	3	0	3	0	14	0	3	3	20

Wells + Associates, Inc

Tysons, Virginia

Turning Movement Count - Total Vehicles

PROJECT: Willowood Plaza	DATE: 5/3/2022	SOUTHBOUND ROAD: Middle Site Driveway I
W+A JOB NO: 8738	DAY: Tuesday	NORTHBOUND ROAD: Office Driveway
INTERSECTION: Eaton Pl. & Middle Driveway I	WEATHER: clear	WESTBOUND ROAD: Eaton Place
LOCATION: Fairfax County, VA	COUNTED BY: Agan	EASTBOUND ROAD: Eaton Place
INPUTED BY: agan		

Time Period	Southbound Middle Site Driveway I					Westbound Eaton Place					Northbound Office Driveway					Eastbound Eaton Place					North East & & Total						
	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	Right	Thru	Left/	Turn	Total	PHF	South	West	
15 Minute Volumes																											
6:00 AM - 6:15 AM	2	0	1	0	3		0	10	0	0	10		0	0	0	0	0		0	24	0	0	24		3	34	37
6:15 AM - 6:30 AM	0	0	0	0	0		0	16	0	0	16		0	0	0	0	0		0	37	0	0	37		0	53	53
6:30 AM - 6:45 AM	0	0	1	0	1		0	26	0	0	26		0	0	0	0	0		0	42	1	0	43		1	69	70
6:45 AM - 7:00 AM	0	0	0	0	0		0	29	0	0	29		0	0	0	0	0		0	50	0	0	50		0	79	79
7:00 AM - 7:15 AM	0	0	0	0	0		1	30	0	0	31		0	0	0	0	0		0	56	0	0	56		0	87	87
7:15 AM - 7:30 AM	0	0	0	0	0		1	40	0	0	41		0	0	0	0	0		0	47	1	0	48		0	89	89
7:30 AM - 7:45 AM	0	0	1	0	1		1	53	0	0	54		0	0	0	0	0		0	84	2	0	86		1	140	141
7:45 AM - 8:00 AM	0	0	0	0	0		1	54	0	0	55		0	0	0	0	0		0	135	2	0	137		0	192	192
8:00 AM - 8:15 AM	2	0	1	0	3		2	74	0	0	76		0	0	0	0	0		0	97	6	0	103		3	179	182
8:15 AM - 8:30 AM	0	0	1	0	1		2	59	0	0	61		0	0	0	0	0		0	57	2	0	59		1	120	121
8:30 AM - 8:45 AM	0	0	0	0	0		2	57	0	0	59		0	0	0	0	0		0	63	4	0	67		0	126	126
8:45 AM - 9:00 AM	3	0	3	0	6		0	46	0	0	46		0	0	0	0	0		0	62	7	0	69		6	115	121
4:00 PM - 4:15 PM	4	0	1	0	5		0	82	0	0	82		0	0	0	0	0		0	117	0	0	117		5	199	204
4:15 PM - 4:30 PM	4	0	2	0	6		0	85	0	0	85		0	0	0	0	0		0	84	1	0	85		6	170	176
4:30 PM - 4:45 PM	1	0	3	0	4		0	85	0	0	85		0	0	0	0	0		0	87	0	0	87		4	172	176
4:45 PM - 5:00 PM	0	0	4	0	4		0	94	0	0	94		0	0	0	0	0		0	70	1	0	71		4	165	169
5:00 PM - 5:15 PM	2	0	1	0	3		0	112	0	0	112		0	0	0	0	0		0	86	1	0	87		3	199	202
5:15 PM - 5:30 PM	1	0	2	0	3		1	114	0	0	115		0	0	0	0	0		0	101	0	0	101		3	216	219
5:30 PM - 5:45 PM	2	0	2	0	4		1	99	0	0	100		0	0	0	0	0		0	86	0	0	86		4	186	190
5:45 PM - 6:00 PM	1	0	1	0	2		0	96	0	0	96		0	0	0	0	0		0	79	0	0	79		2	175	177
6:00 PM - 6:15 PM	1	0	1	0	2		0	83	0	0	83		0	0	0	0	0		0	67	0	0	67		2	150	152
6:15 PM - 6:30 PM	0	0	1	0	1		0	68	0	0	68		0	0	0	0	0		0	52	0	0	52		1	120	121
6:30 PM - 6:45 PM	0	0	0	0	0		0	66	0	0	66		0	0	0	0	0		0	66	0	0	66		0	132	132
6:45 PM - 7:00 PM	1	0	0	0	1		0	66	0	0	66		0	0	0	0	0		0	70	0	0	70		1	136	137
4:00 AM - 4:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:15 AM - 4:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:30 AM - 4:45 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
4:45 AM - 5:00 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:00 AM - 5:15 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:15 AM - 5:30 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:30 AM - 5:45 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
5:45 AM - 6:00 AM	0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0	0	0		0	0	0
Total	24	0	26	0	50		12	1544	0	0	1556		0	0	0	0	0		0	1719	28	0	1747		50	3303	3353
One Hour Volumes																											
6:00 AM - 7:00 AM	2	0	2	0	4	0.33	0	81	0	0	81	0.7	0	0	0	0	0		0	153	1	0	154	0.77	4	235	239
6:15 AM - 7:15 AM	0	0	1	0	1	0.25	1	101	0	0	102	0.82	0	0	0	0	0		0	185	1	0	186	0.83	1	288	289
6:30 AM - 7:30 AM	0	0	1	0	1	0.25	2	125	0	0	127	0.77	0	0	0	0	0		0	195	2	0	197	0.88	1	324	325
6:45 AM - 7:45 AM	0	0	1	0	1	0.25	3	152	0	0	155	0.72	0	0	0	0	0		0	237	3	0	240	0.7	1	395	396
7:00 AM - 8:00 AM	0	0	1	0	1	0.25	4	177	0	0	181	0.82	0	0	0	0	0		0	322	5	0	327	0.6	1	508	509
7:15 AM - 8:15 AM	2	0	2	0	4	0.33	5	221	0	0	226	0.74	0	0	0	0	0		0	363	11	0	374	0.68	4	600	604
7:30 AM - 8:30 AM	2	0	3	0	5	0.42	6	240	0	0	246	0.81	0	0	0	0	0		0	373	12	0	385	0.7	5	631	636
7:45 AM - 8:45 AM	2	0	2	0	4	0.33	7	244	0	0	251	0.83	0	0	0	0	0		0	352	14	0	366	0.67	4	617	621
8:00 AM - 9:00 AM	5	0	5	0	10	0.42	6	236	0	0	242	0.8	0	0	0	0	0		0	279	19	0	298	0.72	10	540	550
4:00 PM - 5:00 PM	9	0	10	0	19	0.79	0	346	0	0	346	0.92	0	0	0	0	0		0	358	2	0	360	0.77	19	706	725
4:15 PM - 5:15 PM	7	0	10	0	17	0.71	0	376	0	0	376	0.84	0	0	0	0	0		0	327	3	0	330	0.95	17	706	723
4:30 PM - 5:30 PM	4	0	10	0	14	0.88	1	405	0	0	406	0.88	0	0	0	0	0		0	344	2	0	346	0.86	14	752	766
4:45 PM - 5:45 PM	5	0	9	0	14	0.88	2	419	0	0	421	0.92	0	0	0	0	0		0	343	2	0	345	0.85	14	766	780
5:00 PM - 6:00 PM	6	0	6	0	12	0.75	2	421	0	0	423	0.92	0	0	0	0	0		0	352	1	0	353	0.87	12	776	788
5:15 PM - 6:15 PM	5	0	6	0	11	0.69	2	392	0	0	394	0.86	0	0	0	0	0		0	333	0	0	333	0.82	11	727	738
5:30 PM - 6:30 PM	4	0	5	0	9	0.56	1	346	0	0	347	0.87	0	0	0	0	0		0	284	0	0	284	0.83	9	631	640
5:45 PM - 6:45 PM	2	0	3	0	5	0.63	0	313	0	0	313	0.82	0	0	0	0	0		0	264	0	0	264	0.84	5	577	582
6:00 PM - 7:00 PM	2	0	2	0	4	0.5	0	283	0	0	283	0.85	0	0	0	0	0		0	255	0	0	255	0.91	4	538	542

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Bicycles

PROJECT: Willowwood Plaza		DATE: 5/3/2022		SOUTHBOUND ROAD: Middle Site Driveway I																
W+A JOB NO: 8738		DAY: Tuesday		NORTHBOUND ROAD: Office Driveway																
INTERSECTION: Eaton Pl. & Middle Drive		WEATHER: clear		WESTBOUND ROAD: Eaton Place																
LOCATION: Fairfax County,VA		COUNTED BY: Agan		EASTBOUND ROAD: Eaton Place																
		INPUTED BY: agan																		
Time Period	Southbound Middle Site Driveway I				Westbound Eaton Place				Northbound Office Driveway				Eastbound Eaton Place				North East & & Total			
	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	South	West		
15 Minute Volumes																				
6:00 AM - 6:15 AM				0				0				0			1		1	0	1	1
6:15 AM - 6:30 AM				0				0				0					0	0	0	0
6:30 AM - 6:45 AM				0				0				0					0	0	0	0
6:45 AM - 7:00 AM				0				0				0					0	0	0	0
7:00 AM - 7:15 AM				0				0				0					0	0	0	0
7:15 AM - 7:30 AM				0				0				0					0	0	0	0
7:30 AM - 7:45 AM				0				0				0					0	0	0	0
7:45 AM - 8:00 AM				0				0				0			1		1	0	1	1
8:00 AM - 8:15 AM				0				0				0					0	0	0	0
8:15 AM - 8:30 AM				0				0				0					0	0	0	0
8:30 AM - 8:45 AM				0				0				0					0	0	0	0
8:45 AM - 9:00 AM				0				0				0					0	0	0	0
4:00 PM - 4:15 PM				0				0				0					0	0	0	0
4:15 PM - 4:30 PM				0				0				0					0	0	0	0
4:30 PM - 4:45 PM				0				0				0					0	0	0	0
4:45 PM - 5:00 PM				0				0				0					0	0	0	0
5:00 PM - 5:15 PM				0				0				0					0	0	0	0
5:15 PM - 5:30 PM				0				0				0			1		1	0	1	1
5:30 PM - 5:45 PM				0				0				0					0	0	0	0
5:45 PM - 6:00 PM				0				0				0					0	0	0	0
6:00 PM - 6:15 PM				0				0				0					0	0	0	0
6:15 PM - 6:30 PM				0			1	1				0					0	0	1	1
6:30 PM - 6:45 PM				0				0				0					0	0	0	0
6:45 PM - 7:00 PM				0			1	1				0			1		1	0	2	2
Total	0	0	0	0	0	2	0	2	0	0	0	0	0	4	0	4	0	6	6	6
One Hour Volumes																				
6:00 AM - 7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
6:15 AM - 7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:30 AM - 7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:45 AM - 7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:00 AM - 8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
7:15 AM - 8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
7:30 AM - 8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
7:45 AM - 8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
8:00 AM - 9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM - 5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:15 PM - 5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:30 PM - 5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
4:45 PM - 5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
5:00 PM - 6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
5:15 PM - 6:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1	1
5:30 PM - 6:30 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1	1
5:45 PM - 6:45 PM	0	0	0	0	0	1	0	1	0	0	0	0	0	0	0	0	0	1	1	1
6:00 PM - 7:00 PM	0	0	0	0	0	2	0	2	0	0	0	0	0	1	0	1	0	3	3	3

Wells + Associates, Inc.

Tysons, Virginia

Pedestrian Volume Survey

<p>PROJECT: Willowwood Plaza W + A JOB NO: 8738 INTERSECTION: Eaton Pl. & Middle Driveway I LOCATION: Fairfax County, VA DATE: 5/3/2022 DAY: Tuesday WEATHER: clear COUNTED BY: Agan INPUTED BY: agan</p>	
--	--

Time Period	Movement								1+2	3+4	5+6	7+8	Total	
	1	2	3	4	5	6	7	8						
15 Minute Volumes														
6:00 AM - 6:15 AM		1								1	0	0	0	1
6:15 AM - 6:30 AM				1				1		0	1	1	0	2
6:30 AM - 6:45 AM			1							1	0	0	0	1
6:45 AM - 7:00 AM		2								2	0	0	0	2
7:00 AM - 7:15 AM						1				0	0	1	0	1
7:15 AM - 7:30 AM		1								1	0	0	0	1
7:30 AM - 7:45 AM								1		0	0	1	0	1
7:45 AM - 8:00 AM										0	0	0	0	0
8:00 AM - 8:15 AM		1								1	0	0	0	1
8:15 AM - 8:30 AM										0	0	0	0	0
8:30 AM - 8:45 AM										0	0	0	0	0
8:45 AM - 9:00 AM										0	0	0	0	0
4:00 PM - 4:15 PM										0	0	0	0	0
4:15 PM - 4:30 PM								1		0	0	1	0	1
4:30 PM - 4:45 PM										0	0	0	0	0
4:45 PM - 5:00 PM			1							1	0	0	0	1
5:00 PM - 5:15 PM										0	0	0	0	0
5:15 PM - 5:30 PM			2		1					2	1	0	0	3
5:30 PM - 5:45 PM			3							3	0	0	0	3
5:45 PM - 6:00 PM			1	2						3	0	0	0	3
6:00 PM - 6:15 PM										0	0	0	0	0
6:15 PM - 6:30 PM				5						5	0	0	0	5
6:30 PM - 6:45 PM				3						3	0	0	0	3
6:45 PM - 7:00 PM				1						1	0	0	0	1
Total		6	18	1	1	1	3	0	0	24	2	4	0	30
One Hour Volumes														
6:00 AM - 7:00 AM		2	2	1	0	0	1	0	0	4	1	1	0	6
6:15 AM - 7:15 AM		2	1	1	0	1	1	0	0	3	1	2	0	6
6:30 AM - 7:30 AM		3	1	0	0	1	0	0	0	4	0	1	0	5
6:45 AM - 7:45 AM		3	0	0	0	1	1	0	0	3	0	2	0	5
7:00 AM - 8:00 AM		1	0	0	0	1	1	0	0	1	0	2	0	3
7:15 AM - 8:15 AM		2	0	0	0	0	1	0	0	2	0	1	0	3
7:30 AM - 8:30 AM		1	0	0	0	0	1	0	0	1	0	1	0	2
7:45 AM - 8:45 AM		1	0	0	0	0	0	0	0	1	0	0	0	1
8:00 AM - 9:00 AM		1	0	0	0	0	0	0	0	1	0	0	0	1
4:00 PM - 5:00 PM		0	1	0	0	0	1	0	0	1	0	1	0	2
4:15 PM - 5:15 PM		0	1	0	0	0	1	0	0	1	0	1	0	2
4:30 PM - 5:30 PM		0	3	0	1	0	0	0	0	3	1	0	0	4
4:45 PM - 5:45 PM		0	6	0	1	0	0	0	0	6	1	0	0	7
5:00 PM - 6:00 PM		1	7	0	1	0	0	0	0	8	1	0	0	9
5:15 PM - 6:15 PM		1	7	0	1	0	0	0	0	8	1	0	0	9
5:30 PM - 6:30 PM		1	10	0	0	0	0	0	0	11	0	0	0	11
5:45 PM - 6:45 PM		1	10	0	0	0	0	0	0	11	0	0	0	11
6:00 PM - 7:00 PM		1	8	0	0	0	0	0	0	9	0	0	0	9

Wells + Associates, Inc

Tysons, Virginia

Turning Movement Count - Total Vehicles

PROJECT: Willowood Plaza	DATE: 5/3/2022	SOUTHBOUND ROAD: East Site Driveway
W+A JOB NO: 8738	DAY: Tuesday	NORTHBOUND ROAD: 0
INTERSECTION: Eaton Pl. & East Site Driveway	WEATHER: clear	WESTBOUND ROAD: Eaton Place
LOCATION: Fairfax County, VA	COUNTED BY: Agan	EASTBOUND ROAD: Eaton Place
INPUTED BY: agan		

Time Period	Southbound East Site Driveway					Westbound Eaton Place					Northbound 0					Eastbound Eaton Place					North East & & Total		
	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	South	West	
15 Minute Volumes																							
6:00 AM - 6:15 AM	1	0	0	0	1	2	0	0	0	2	0	0	0	0	0	0	0	2	0	2	1	4	5
6:15 AM - 6:30 AM	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	0	1	0	1	0	2	2
6:30 AM - 6:45 AM	0	0	2	0	2	1	0	0	0	1	0	0	0	0	0	0	1	0	1	0	2	4	4
6:45 AM - 7:00 AM	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	6	0	6	0	1	8	9
7:00 AM - 7:15 AM	1	0	1	0	2	4	0	0	0	4	0	0	0	0	0	0	2	0	2	0	2	6	8
7:15 AM - 7:30 AM	0	0	1	0	1	2	0	0	0	2	0	0	0	0	0	0	2	0	2	0	1	4	5
7:30 AM - 7:45 AM	0	0	0	0	0	4	0	0	0	4	0	0	0	0	0	0	7	0	7	0	0	11	11
7:45 AM - 8:00 AM	0	0	1	0	1	8	0	0	0	8	0	0	0	0	0	0	3	0	3	0	1	11	12
8:00 AM - 8:15 AM	1	0	0	0	1	7	0	0	0	7	0	0	0	0	0	0	5	0	5	0	1	12	13
8:15 AM - 8:30 AM	0	0	0	0	0	14	0	0	0	14	0	0	0	0	0	0	5	0	5	0	0	19	19
8:30 AM - 8:45 AM	0	0	0	0	0	7	0	0	0	7	0	0	0	0	0	0	6	0	6	0	0	13	13
8:45 AM - 9:00 AM	1	0	1	0	2	13	0	0	0	13	0	0	0	0	0	0	1	0	1	0	2	14	16
4:00 PM - 4:15 PM	7	0	6	0	13	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	13	0	13
4:15 PM - 4:30 PM	3	0	6	0	9	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	9	1	10
4:30 PM - 4:45 PM	3	0	5	0	8	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	8	1	9
4:45 PM - 5:00 PM	4	0	4	0	8	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	8	1	9
5:00 PM - 5:15 PM	17	0	7	0	24	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	24	1	25
5:15 PM - 5:30 PM	6	0	10	0	16	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	16	1	17
5:30 PM - 5:45 PM	5	0	5	0	10	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0	10	1	11
5:45 PM - 6:00 PM	5	0	6	0	11	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	11	0	11
6:00 PM - 6:15 PM	8	0	4	0	12	3	0	0	0	3	0	0	0	0	0	0	0	0	0	0	12	3	15
6:15 PM - 6:30 PM	5	0	4	0	9	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	9	0	9
6:30 PM - 6:45 PM	1	0	2	0	3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3
6:45 PM - 7:00 PM	0	0	3	0	3	1	0	0	0	1	0	0	0	0	0	0	1	0	1	0	3	2	5
4:00 AM - 4:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:15 AM - 4:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:30 AM - 4:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:45 AM - 5:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:00 AM - 5:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:15 AM - 5:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:30 AM - 5:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:45 AM - 6:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Total	68	0	69	0	137	75	0	0	0	75	0	0	0	0	0	0	0	42	0	42	137	117	254

One Hour Volumes																								
Time Period	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	Right	Thru	Left-/Turn	Total	PHF	South	West		
6:00 AM - 7:00 AM	1	0	3	0	4	0.5	6	0	0	0	6	0.75	0	0	0	0	0	10	0	10	0.42	4	16	20
6:15 AM - 7:15 AM	1	0	4	0	5	0.63	8	0	0	0	8	0.5	0	0	0	0	0	10	0	10	0.42	5	18	23
6:30 AM - 7:30 AM	1	0	5	0	6	0.75	9	0	0	0	9	0.56	0	0	0	0	0	11	0	11	0.46	6	20	26
6:45 AM - 7:45 AM	1	0	3	0	4	0.5	12	0	0	0	12	0.75	0	0	0	0	0	17	0	17	0.61	4	29	33
7:00 AM - 8:00 AM	1	0	3	0	4	0.5	18	0	0	0	18	0.56	0	0	0	0	0	14	0	14	0.5	4	32	36
7:15 AM - 8:15 AM	1	0	2	0	3	0.75	21	0	0	0	21	0.66	0	0	0	0	0	17	0	17	0.61	3	38	41
7:30 AM - 8:30 AM	1	0	1	0	2	0.5	33	0	0	0	33	0.59	0	0	0	0	0	20	0	20	0.71	2	53	55
7:45 AM - 8:45 AM	1	0	1	0	2	0.5	36	0	0	0	36	0.64	0	0	0	0	0	19	0	19	0.79	2	55	57
8:00 AM - 9:00 AM	2	0	1	0	3	0.38	41	0	0	0	41	0.73	0	0	0	0	0	17	0	17	0.71	3	58	61
4:00 PM - 5:00 PM	17	0	21	0	38	0.73	3	0	0	3	0.75	0	0	0	0	0	0	0	0	0	38	3	41	
4:15 PM - 5:15 PM	27	0	22	0	49	0.51	4	0	0	4	1	0	0	0	0	0	0	0	0	0	49	4	53	
4:30 PM - 5:30 PM	30	0	26	0	56	0.58	4	0	0	4	1	0	0	0	0	0	0	0	0	0	56	4	60	
4:45 PM - 5:45 PM	32	0	26	0	58	0.6	4	0	0	4	1	0	0	0	0	0	0	0	0	0	58	4	62	
5:00 PM - 6:00 PM	33	0	28	0	61	0.64	3	0	0	3	0.75	0	0	0	0	0	0	0	0	0	61	3	64	
5:15 PM - 6:15 PM	24	0	25	0	49	0.77	5	0	0	5	0.42	0	0	0	0	0	0	0	0	0	49	5	54	
5:30 PM - 6:30 PM	23	0	19	0	42	0.88	4	0	0	4	0.33	0	0	0	0	0	0	0	0	0	42	4	46	
5:45 PM - 6:45 PM	19	0	16	0	35	0.73	3	0	0	3	0.25	0	0	0	0	0	0	0	0	0	35	3	38	
6:00 PM - 7:00 PM	14	0	13	0	27	0.56	4	0	0	4	0.33	0	0	0	0	0	0	1	0	1	0.25	27	5	32

Wells + Associates, Inc.

Tysons, Virginia

Turning Movement Count - Bicycles

PROJECT: Willowwood Plaza		DATE: 5/3/2022		SOUTHBOUND ROAD: East Site Driveway														
W+A JOB NO: 8738		DAY: Tuesday		NORTHBOUND ROAD: 0														
INTERSECTION: Eaton Pl. & East Site Driveway		WEATHER: clear		WESTBOUND ROAD: Eaton Place														
LOCATION: Fairfax County, VA		COUNTED BY: Agan		EASTBOUND ROAD: Eaton Place														
INPUTED BY: agan																		
Time Period	Southbound East Site Driveway			Westbound Eaton Place			Northbound 0			Eastbound Eaton Place			North East & & Total					
	Right	Thru	Left	Total	Right	Thru	Left	Total	Right	Thru	Left	Total	South	West				
15 Minute Volumes																		
6:00 AM - 6:15 AM				0				0				0	1	1	0	1	1	
6:15 AM - 6:30 AM				0				0				0	0	0	0	0	0	
6:30 AM - 6:45 AM				0				0				0	1	1	0	1	1	
6:45 AM - 7:00 AM				0				0				0	0	0	0	0	0	
7:00 AM - 7:15 AM				0				0				0	0	0	0	0	0	
7:15 AM - 7:30 AM				0				0				0	0	0	0	0	0	
7:30 AM - 7:45 AM				0				0				0	0	0	0	0	0	
7:45 AM - 8:00 AM				0				0				0	1	1	0	1	1	
8:00 AM - 8:15 AM				0				0				0	0	0	0	0	0	
8:15 AM - 8:30 AM				0				0				0	0	0	0	0	0	
8:30 AM - 8:45 AM				0				0				0	0	0	0	0	0	
8:45 AM - 9:00 AM				0				0				0	0	0	0	0	0	
4:00 PM - 4:15 PM				0				0				0	0	0	0	0	0	
4:15 PM - 4:30 PM				0				0				0	0	0	0	0	0	
4:30 PM - 4:45 PM				0				0				0	0	0	0	0	0	
4:45 PM - 5:00 PM				0				0				0	0	0	0	0	0	
5:00 PM - 5:15 PM				0				0				0	0	0	0	0	0	
5:15 PM - 5:30 PM				0				0				0	0	0	0	0	0	
5:30 PM - 5:45 PM				0				0				0	0	0	0	0	0	
5:45 PM - 6:00 PM				0				0				0	0	0	0	0	0	
6:00 PM - 6:15 PM				0				0				0	0	0	0	0	0	
6:15 PM - 6:30 PM				0				0				0	0	0	0	0	0	
6:30 PM - 6:45 PM				0				0				0	0	0	0	0	0	
6:45 PM - 7:00 PM				0				0				0	0	0	0	0	0	
Total	0	0	0	0	0	0	0	0	0	0	0	0	3	0	3	0	3	3
One Hour Volumes																		
6:00 AM - 7:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	2	0	2	0	2	2
6:15 AM - 7:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
6:30 AM - 7:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
6:45 AM - 7:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
7:00 AM - 8:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
7:15 AM - 8:15 AM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
7:30 AM - 8:30 AM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
7:45 AM - 8:45 AM	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	0	1	1
8:00 AM - 9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM - 5:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:15 PM - 5:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:30 PM - 5:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
4:45 PM - 5:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:00 PM - 6:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:15 PM - 6:15 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:30 PM - 6:30 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
5:45 PM - 6:45 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
6:00 PM - 7:00 PM	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Wells + Associates, Inc.

Tysons, Virginia

Pedestrian Volume Survey

<p>PROJECT: Willowwood Plaza W + A JOB NO: 8738 INTERSECTION: Eaton Pl. & East Site Driveway LOCATION: Fairfax County, VA DATE: 5/3/2022 DAY: Tuesday WEATHER: clear COUNTED BY: Agan INPUTED BY: agan</p>	<p style="text-align: center;">East Site Driveway</p> <p style="text-align: center;">Eaton Place Eaton Place</p> <p style="text-align: center;">North ↑</p>
---	--

Time Period	Movement								1+2	3+4	5+6	7+8	Total
	1	2	3	4	5	6	7	8					
15 Minute Volumes													
6:00 AM - 6:15 AM									0	0	0	0	0
6:15 AM - 6:30 AM		1							1	0	0	0	1
6:30 AM - 6:45 AM	2								2	0	0	0	2
6:45 AM - 7:00 AM	1								1	0	0	0	1
7:00 AM - 7:15 AM									0	0	0	0	0
7:15 AM - 7:30 AM	1	1							2	0	0	0	2
7:30 AM - 7:45 AM		1						1	1	0	0	1	2
7:45 AM - 8:00 AM	1								1	0	0	0	1
8:00 AM - 8:15 AM									0	0	0	0	0
8:15 AM - 8:30 AM									0	0	0	0	0
8:30 AM - 8:45 AM									0	0	0	0	0
8:45 AM - 9:00 AM									0	0	0	0	0
4:00 PM - 4:15 PM									0	0	0	0	0
4:15 PM - 4:30 PM	1								1	0	0	0	1
4:30 PM - 4:45 PM									0	0	0	0	0
4:45 PM - 5:00 PM									0	0	0	0	0
5:00 PM - 5:15 PM	1							1	1	0	0	1	2
5:15 PM - 5:30 PM									0	0	0	0	0
5:30 PM - 5:45 PM		1							1	0	0	0	1
5:45 PM - 6:00 PM	1								1	0	0	0	1
6:00 PM - 6:15 PM									0	0	0	0	0
6:15 PM - 6:30 PM		5							5	0	0	0	5
6:30 PM - 6:45 PM									0	0	0	0	0
6:45 PM - 7:00 PM	1	3							4	0	0	0	4
Total	9	12	0	0	0	0	0	2	21	0	0	2	23
One Hour Volumes													
6:00 AM - 7:00 AM	3	1	0	0	0	0	0	0	4	0	0	0	4
6:15 AM - 7:15 AM	3	1	0	0	0	0	0	0	4	0	0	0	4
6:30 AM - 7:30 AM	4	1	0	0	0	0	0	0	5	0	0	0	5
6:45 AM - 7:45 AM	2	2	0	0	0	0	0	1	4	0	0	1	5
7:00 AM - 8:00 AM	2	2	0	0	0	0	0	1	4	0	0	1	5
7:15 AM - 8:15 AM	2	2	0	0	0	0	0	1	4	0	0	1	5
7:30 AM - 8:30 AM	1	1	0	0	0	0	0	1	2	0	0	1	3
7:45 AM - 8:45 AM	1	0	0	0	0	0	0	0	1	0	0	0	1
8:00 AM - 9:00 AM	0	0	0	0	0	0	0	0	0	0	0	0	0
4:00 PM - 5:00 PM	1	0	0	0	0	0	0	0	1	0	0	0	1
4:15 PM - 5:15 PM	2	0	0	0	0	0	0	1	2	0	0	1	3
4:30 PM - 5:30 PM	1	0	0	0	0	0	0	1	1	0	0	1	2
4:45 PM - 5:45 PM	1	1	0	0	0	0	0	1	2	0	0	1	3
5:00 PM - 6:00 PM	2	1	0	0	0	0	0	1	3	0	0	1	4
5:15 PM - 6:15 PM	1	1	0	0	0	0	0	0	2	0	0	0	2
5:30 PM - 6:30 PM	1	6	0	0	0	0	0	0	7	0	0	0	7
5:45 PM - 6:45 PM	1	5	0	0	0	0	0	0	6	0	0	0	6
6:00 PM - 7:00 PM	1	8	0	0	0	0	0	0	9	0	0	0	9

APPENDIX C

Existing Capacity Analysis Worksheets



1: Chain Bridge Road & Norman Avenue/Oak Place

08/09/2023



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	154	241	219	7	1141	540	970
v/c Ratio	0.64	0.41	0.33	0.09	0.95	1.48	0.44
Control Delay	88.9	5.7	0.9	89.0	86.7	269.7	38.5
Queue Delay	0.0	2.4	2.6	0.0	0.0	0.0	0.0
Total Delay	88.9	8.1	3.5	89.0	86.7	269.7	38.5
Queue Length 50th (ft)	180	17	1	9	520	~875	298
Queue Length 95th (ft)	269	m28	m0	28	#610	#1123	390
Internal Link Dist (ft)	420	47			982		920
Turn Bay Length (ft)				190		1000	
Base Capacity (vph)	239	583	666	188	1200	366	2219
Starvation Cap Reductn	0	226	331	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.68	0.65	0.04	0.95	1.48	0.44

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2022 Baseline AM

08/09/2023



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕	↗	↖	↑↑↑		↖	↑↑↑		
Traffic Volume (vph)	47	71	26	102	62	268	7	869	204	508	890	22	
Future Volume (vph)	47	71	26	102	62	268	7	869	204	508	890	22	
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		1.00	0.91		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.96	0.85	1.00	0.97		1.00	1.00		
Flt Protected		0.98			0.98	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1784			1653	1504	1770	4940		1770	5067		
Flt Permitted		0.98			0.98	1.00	0.95	1.00		0.08	1.00		
Satd. Flow (perm)		1784			1653	1504	1770	4940		146	5067		
Peak-hour factor, PHF	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	
Adj. Flow (vph)	50	76	28	109	66	285	7	924	217	540	947	23	
RTOR Reduction (vph)	0	4	0	0	7	143	0	0	0	0	0	0	
Lane Group Flow (vph)	0	150	0	0	234	76	7	1141	0	540	970	0	
Confl. Peds. (#/hr)	1					1							
Confl. Bikes (#/hr)			1										
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		pm+pt	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases										6			
Actuated Green, G (s)		23.1			64.0	64.0	1.6	44.2		84.2	75.8		
Effective Green, g (s)		25.1			66.0	66.0	3.6	46.2		86.2	77.8		
Actuated g/C Ratio		0.13			0.35	0.35	0.02	0.24		0.45	0.41		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		235			574	522	33	1201		367	2074		
v/s Ratio Prot		c0.08			c0.14	0.05	0.00	0.23		c0.27	0.19		
v/s Ratio Perm										c0.39			
v/c Ratio		0.64			0.41	0.15	0.21	0.95		1.47	0.47		
Uniform Delay, d1		78.1			47.1	42.6	91.8	70.8		64.0	41.0		
Progression Factor		1.00			0.09	0.01	1.00	1.00		1.00	1.00		
Incremental Delay, d2		5.8			0.8	0.2	3.2	16.5		226.5	0.8		
Delay (s)		83.9			5.2	0.7	95.0	87.2		290.5	41.7		
Level of Service		F			A	A	F	F		F	D		
Approach Delay (s)		83.9			3.0			87.3			130.7		
Approach LOS		F			A			F			F		
Intersection Summary													
HCM 2000 Control Delay			95.3		HCM 2000 Level of Service						F		
HCM 2000 Volume to Capacity ratio			1.04										
Actuated Cycle Length (s)			190.0		Sum of lost time (s)					30.5			
Intersection Capacity Utilization			87.7%		ICU Level of Service					E			
Analysis Period (min)			15										
c Critical Lane Group													



Lane Group	EBL	EBT	WBL	WBT	WBR	NBT	SBL	SBT	NEL
Lane Group Flow (vph)	102	1790	11	1073	370	4	194	189	6
v/c Ratio	0.30	0.49	0.06	0.46	0.34	0.05	0.70	0.69	0.08
Control Delay	11.5	16.2	12.1	20.5	8.9	88.0	111.3	110.7	88.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	11.5	16.2	12.1	20.5	8.9	88.0	111.3	110.7	88.8
Queue Length 50th (ft)	27	256	3	295	64	5	242	236	7
Queue Length 95th (ft)	85	635	16	593	201	18	m303	m292	26
Internal Link Dist (ft)		810		1204		100		99	220
Turn Bay Length (ft)	260		140						
Base Capacity (vph)	402	3630	193	2311	1092	89	404	400	173
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.49	0.06	0.46	0.34	0.04	0.48	0.47	0.03


Intersection Summary

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2022 Baseline AM

08/09/2023



Movement	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations	↖	↑↑↑					↑↑	↗		↕		↘
Traffic Volume (vph)	88	1535	2	3	8	2	923	318	2	0	2	309
Future Volume (vph)	88	1535	2	3	8	2	923	318	2	0	2	309
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0					6.0	6.0	6.0	5.0		5.3
Lane Util. Factor	1.00	0.91					1.00	0.95	1.00	1.00		0.95
Frbp, ped/bikes	1.00	1.00					1.00	1.00	0.99	1.00		1.00
Flpb, ped/bikes	1.00	1.00					1.00	1.00	1.00	1.00		1.00
Frt	1.00	1.00					1.00	1.00	0.85	0.93		1.00
Flt Protected	0.95	1.00					0.95	1.00	1.00	0.98		0.95
Satd. Flow (prot)	1770	5082					1770	3539	1560	1695		1681
Flt Permitted	0.19	1.00					0.09	1.00	1.00	0.98		0.95
Satd. Flow (perm)	350	5082					168	3539	1560	1695		1681
Peak-hour factor, PHF	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
Adj. Flow (vph)	102	1785	2	3	9	2	1073	370	2	0	2	359
RTOR Reduction (vph)	0	0	0	0	0	0	0	86	0	0	0	0
Lane Group Flow (vph)	102	1790	0	0	0	11	1073	284	0	4	0	194
Confl. Peds. (#/hr)	1		1	1	1	1		1				
Confl. Bikes (#/hr)			1	1								
Heavy Vehicles (%)	2%	2%	2%	10%	2%	2%	2%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Split	NA		Split
Protected Phases	5	2			1	1	6		7	7		3
Permitted Phases	2				6	6		6				
Actuated Green, G (s)	127.4	118.0					113.8	111.2	111.2	1.5		29.4
Effective Green, g (s)	130.6	120.0					117.8	113.2	113.2	3.5		31.4
Actuated g/C Ratio	0.69	0.63					0.62	0.60	0.60	0.02		0.17
Clearance Time (s)	8.0	8.0					8.0	8.0	8.0	7.0		7.3
Vehicle Extension (s)	3.0	5.0					3.0	5.0	5.0	3.0		5.0
Lane Grp Cap (vph)	325	3209					142	2108	929	31		277
v/s Ratio Prot	c0.02	c0.35					0.00	0.30		c0.00		c0.12
v/s Ratio Perm	0.20						0.05		0.18			
v/c Ratio	0.31	0.56					0.08	0.51	0.31	0.13		0.70
Uniform Delay, d1	13.9	19.9					15.9	22.3	19.0	91.8		74.9
Progression Factor	1.00	1.00					1.00	1.00	1.00	1.00		1.33
Incremental Delay, d2	0.6	0.7					0.2	0.9	0.9	1.9		9.0
Delay (s)	14.5	20.6					16.1	23.2	19.8	93.6		108.8
Level of Service	B	C					B	C	B	F		F
Approach Delay (s)		20.3					22.3			93.6		
Approach LOS		C					C			F		

Intersection Summary		
HCM 2000 Control Delay	30.3	HCM 2000 Level of Service
HCM 2000 Volume to Capacity ratio	0.59	C
Actuated Cycle Length (s)	190.0	Sum of lost time (s)
Intersection Capacity Utilization	72.0%	32.9
Analysis Period (min)	15	ICU Level of Service
c Critical Lane Group		C

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2022 Baseline AM
 08/09/2023



Movement	SBT	SBR2	NEL2	NEL	NER
Lane Configurations	↕			↔	
Traffic Volume (vph)	2	19	4	0	1
Future Volume (vph)	2	19	4	0	1
Ideal Flow (vphp)	1900	1900	1900	1900	1900
Total Lost time (s)	5.3			4.6	
Lane Util. Factor	0.95			1.00	
Frbp, ped/bikes	1.00			1.00	
Flpb, ped/bikes	1.00			1.00	
Frt	0.98			0.98	
Flt Protected	0.96			0.96	
Satd. Flow (prot)	1666			1621	
Flt Permitted	0.96			0.96	
Satd. Flow (perm)	1666			1621	
Peak-hour factor, PHF	0.86	0.86	0.86	0.86	0.86
Adj. Flow (vph)	2	22	5	0	1
RTOR Reduction (vph)	0	0	0	0	0
Lane Group Flow (vph)	189	0	0	6	0
Confl. Peds. (#/hr)					
Confl. Bikes (#/hr)					
Heavy Vehicles (%)	2%	2%	10%	10%	10%
Turn Type	NA		Prot	Prot	
Protected Phases	3		4	4	
Permitted Phases					
Actuated Green, G (s)	29.4			1.6	
Effective Green, g (s)	31.4			3.6	
Actuated g/C Ratio	0.17			0.02	
Clearance Time (s)	7.3			6.6	
Vehicle Extension (s)	5.0			3.0	
Lane Grp Cap (vph)	275			30	
v/s Ratio Prot	0.11			c0.00	
v/s Ratio Perm					
v/c Ratio	0.69			0.20	
Uniform Delay, d1	74.7			91.8	
Progression Factor	1.33			1.00	
Incremental Delay, d2	8.3			3.3	
Delay (s)	107.9			95.1	
Level of Service	F			F	
Approach Delay (s)	108.4			95.1	
Approach LOS	F			F	
Intersection Summary					

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place

2022 Baseline AM
 08/09/2023




Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔			↔↔			↑	↗		↔	
Traffic Volume (veh/h)	276	507	13	3	247	11	6	4	3	4	0	29
Future Volume (Veh/h)	276	507	13	3	247	11	6	4	3	4	0	29
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.85	0.85	0.92	0.92	0.85	0.85	0.92	0.92	0.92	0.85	0.92	0.85
Hourly flow rate (vph)	325	596	14	3	291	13	7	4	3	5	0	34
Pedestrians					1			2				
Lane Width (ft)					12.0			12.0				
Walking Speed (ft/s)					4.0			4.0				
Percent Blockage					0			0				
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)		567			1199							
pX, platoon unblocked				0.86			0.86	0.86	0.86	0.86	0.86	
vC, conflicting volume	304			612			1440	1565	308	1258	1566	152
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	304			209			1177	1323	0	963	1323	152
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	74			100			93	96	100	96	100	96
cM capacity (veh/h)	1254			1161			96	98	925	138	98	867
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1					
Volume Total	623	312	148	158	11	3	39					
Volume Left	325	0	3	0	7	0	5					
Volume Right	0	14	0	13	0	3	34					
cSH	1254	1700	1161	1700	96	925	518					
Volume to Capacity	0.26	0.18	0.00	0.09	0.11	0.00	0.08					
Queue Length 95th (ft)	26	0	0	0	9	0	6					
Control Delay (s)	6.0	0.0	0.2	0.0	47.1	8.9	12.5					
Lane LOS	A		A		E	A	B					
Approach Delay (s)	4.0		0.1		38.9		12.5					
Approach LOS					E		B					
Intersection Summary												
Average Delay			3.7									
Intersection Capacity Utilization			45.4%	ICU Level of Service	A							
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis

4: Eaton Place & Wwest Driveway

2022 Baseline AM
08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	43	471	253	53	6	8
Future Volume (Veh/h)	43	471	253	53	6	8
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	51	554	298	62	7	9
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		857	909			
pX, platoon unblocked					0.96	
vC, conflicting volume	361				709	181
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	361				602	181
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	96				98	99
cM capacity (veh/h)	1193				394	830
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	236	369	199	161	16	
Volume Left	51	0	0	0	7	
Volume Right	0	0	0	62	9	
cSH	1193	1700	1700	1700	559	
Volume to Capacity	0.04	0.22	0.12	0.09	0.03	
Queue Length 95th (ft)	3	0	0	0	2	
Control Delay (s)	2.1	0.0	0.0	0.0	11.6	
Lane LOS	A				B	
Approach Delay (s)	0.8		0.0		11.6	
Approach LOS					B	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			36.5%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis

5: Eaton Place & Middle Driveway

2022 Baseline AM

08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	43	434	301	23	6	5
Future Volume (Veh/h)	43	434	301	23	6	5
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	51	511	354	27	7	6
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		1145	621			
pX, platoon unblocked						
vC, conflicting volume	382				726	192
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	382				726	192
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	96				98	99
cM capacity (veh/h)	1172				344	817
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	221	341	236	145	13	
Volume Left	51	0	0	0	7	
Volume Right	0	0	0	27	6	
cSH	1172	1700	1700	1700	469	
Volume to Capacity	0.04	0.20	0.14	0.09	0.03	
Queue Length 95th (ft)	3	0	0	0	2	
Control Delay (s)	2.2	0.0	0.0	0.0	12.9	
Lane LOS	A				B	
Approach Delay (s)	0.9		0.0		12.9	
Approach LOS					B	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			35.8%		ICU Level of Service	A
Analysis Period (min)			15			


HCM Unsignalized Intersection Capacity Analysis

6: Eaton Place & East Driveway

2022 Baseline AM
08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	70	369	307	126	13	17
Future Volume (Veh/h)	70	369	307	126	13	17
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	82	434	361	148	15	20
Pedestrians		1			2	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)			307			
pX, platoon unblocked						
vC, conflicting volume	511				818	258
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	511				818	258
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	92				95	97
cM capacity (veh/h)	1049				289	740
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	227	289	241	268	35	
Volume Left	82	0	0	0	15	
Volume Right	0	0	0	148	20	
cSH	1049	1700	1700	1700	443	
Volume to Capacity	0.08	0.17	0.14	0.16	0.08	
Queue Length 95th (ft)	6	0	0	0	6	
Control Delay (s)	3.6	0.0	0.0	0.0	13.8	
Lane LOS	A				B	
Approach Delay (s)	1.6		0.0		13.8	
Approach LOS					B	
Intersection Summary						
Average Delay			1.2			
Intersection Capacity Utilization			38.5%		ICU Level of Service	A
Analysis Period (min)			15			



















Lane Group	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	899	346	13	235
v/c Ratio	0.42	0.61	0.23	1.09
Control Delay	3.0	81.2	62.5	139.8
Queue Delay	51.7	0.0	0.0	1.9
Total Delay	54.6	81.2	62.5	141.7
Queue Length 50th (ft)	30	190	6	~278
Queue Length 95th (ft)	m31	265	32	#486
Internal Link Dist (ft)	47	487	120	220
Turn Bay Length (ft)				
Base Capacity (vph)	2118	636	98	215
Starvation Cap Reductn	1366	0	0	0
Spillback Cap Reductn	0	0	0	1
Storage Cap Reductn	0	0	0	0
Reduced v/c Ratio	1.20	0.54	0.13	1.10

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
7: Willow Crescent Dr & Oak Place/Eaton Place

2022 Baseline AM
08/09/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	50	730	3	0	276	25	2	3	7	43	8	154
Future Volume (vph)	50	730	3	0	276	25	2	3	7	43	8	154
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		6.8			4.5			4.5			5.0	
Lane Util. Factor		0.95			0.95			1.00			1.00	
Frbp, ped/bikes		1.00			1.00			0.96			0.99	
Flpb, ped/bikes		1.00			1.00			1.00			1.00	
Frt		1.00			0.99			0.92			0.90	
Flt Protected		1.00			1.00			0.99			0.99	
Satd. Flow (prot)		3526			3487			1621			1633	
Flt Permitted		1.00			1.00			0.99			0.99	
Satd. Flow (perm)		3526			3487			1621			1633	
Peak-hour factor, PHF	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Adj. Flow (vph)	57	839	3	0	317	29	2	3	8	49	9	177
RTOR Reduction (vph)	0	0	0	0	3	0	0	8	0	0	55	0
Lane Group Flow (vph)	0	899	0	0	343	0	0	5	0	0	180	0
Confl. Peds. (#/hr)	2		5	5		2			6	6		
Confl. Bikes (#/hr)			1									3
Turn Type	Split	NA			NA		Split	NA		Split	NA	
Protected Phases	1 2 3	1 2 3			4		7	7		8	8	
Permitted Phases				4								
Actuated Green, G (s)		114.2			30.5			5.7			18.8	
Effective Green, g (s)		107.3			30.5			5.7			18.8	
Actuated g/C Ratio		0.56			0.16			0.03			0.10	
Clearance Time (s)					4.5			4.5			5.0	
Vehicle Extension (s)					5.5			2.0			2.0	
Lane Grp Cap (vph)		1991			559			48			161	
v/s Ratio Prot		c0.25			c0.10			c0.00			c0.11	
v/s Ratio Perm												
v/c Ratio		0.45			0.61			0.11			1.12	
Uniform Delay, d1		24.2			74.3			89.7			85.6	
Progression Factor		0.14			1.05			1.00			1.00	
Incremental Delay, d2		0.0			3.1			0.4			106.2	
Delay (s)		3.4			80.8			90.0			191.8	
Level of Service		A			F			F			F	
Approach Delay (s)		3.4			80.8			90.0			191.8	
Approach LOS		A			F			F			F	
Intersection Summary												
HCM 2000 Control Delay			51.8									D
HCM 2000 Volume to Capacity ratio			0.57									
Actuated Cycle Length (s)			190.0						34.5			
Intersection Capacity Utilization			62.8%									B
Analysis Period (min)			15									
c Critical Lane Group												

1: Chain Bridge Road & Norman Avenue/Oak Place



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	109	451	422	26	1002	346	1055
v/c Ratio	0.87	0.76	0.57	0.30	0.56	0.98	0.46
Control Delay	146.9	6.1	5.2	109.1	57.8	83.3	42.1
Queue Delay	0.0	54.8	57.3	0.0	0.0	0.0	0.0
Total Delay	146.9	60.9	62.5	109.1	57.8	83.3	42.1
Queue Length 50th (ft)	156	90	93	37	429	338	391
Queue Length 95th (ft)	#288	m2	m0	77	479	#570	446
Internal Link Dist (ft)	420	47			982		920
Turn Bay Length (ft)				190		1000	
Base Capacity (vph)	125	592	741	202	1803	354	2317
Starvation Cap Reductn	0	225	395	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.87	1.23	1.22	0.13	0.56	0.98	0.46

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2022 Baseline PM

08/09/2023



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕	↗	↘	↑↑↑		↘	↑↑↑		
Traffic Volume (vph)	31	59	15	218	65	555	25	866	96	332	953	56	
Future Volume (vph)	31	59	15	218	65	555	25	866	96	332	953	56	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		1.00	0.91		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.95	0.85	1.00	0.99		1.00	0.99		
Flt Protected		0.99			0.98	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1794			1637	1504	1770	5009		1770	5040		
Flt Permitted		0.99			0.98	1.00	0.95	1.00		0.16	1.00		
Satd. Flow (perm)		1794			1637	1504	1770	5009		291	5040		
Peak-hour factor, PHF	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.90	
Adj. Flow (vph)	32	61	16	227	68	578	26	902	100	346	993	62	
RTOR Reduction (vph)	0	3	0	0	8	205	0	0	0	0	0	0	
Lane Group Flow (vph)	0	106	0	0	443	217	26	1002	0	346	1055	0	
Confl. Peds. (#/hr)			1										
Confl. Bikes (#/hr)			1										
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		pm+pt	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases										6			
Actuated Green, G (s)		13.1			76.0	76.0	7.6	77.2		112.2	97.8		
Effective Green, g (s)		15.1			78.0	78.0	9.6	79.2		114.2	99.8		
Actuated g/C Ratio		0.07			0.35	0.35	0.04	0.36		0.52	0.45		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		123			580	533	77	1803		354	2286		
v/s Ratio Prot		c0.06			c0.27	0.14	0.01	0.20		c0.13	0.21		
v/s Ratio Perm										c0.37			
v/c Ratio		0.86			0.76	0.41	0.34	0.56		0.98	0.46		
Uniform Delay, d1		101.4			62.8	53.5	102.1	56.3		48.0	41.5		
Progression Factor		1.00			0.08	0.37	1.00	1.00		1.00	1.00		
Incremental Delay, d2		43.2			0.7	0.1	2.6	1.2		41.3	0.7		
Delay (s)		144.7			6.0	20.2	104.7	57.6		89.4	42.2		
Level of Service		F			A	C	F	E		F	D		
Approach Delay (s)		144.7			12.9			58.8			53.9		
Approach LOS		F			B			E			D		
Intersection Summary													
HCM 2000 Control Delay			47.7		HCM 2000 Level of Service						D		
HCM 2000 Volume to Capacity ratio			0.96										
Actuated Cycle Length (s)			220.0		Sum of lost time (s)						30.5		
Intersection Capacity Utilization			82.1%		ICU Level of Service						E		
Analysis Period (min)			15										

c Critical Lane Group




Lane Group	EBL	EBT	WBL	WBT	WBR	NBT	SBL	SBT	NEL
Lane Group Flow (vph)	39	1381	15	1726	363	18	305	290	18
v/c Ratio	0.27	0.41	0.06	0.75	0.33	0.23	1.22	1.20	0.25
Control Delay	16.9	19.6	13.6	32.4	12.0	107.4	198.7	192.9	108.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	16.9	19.6	13.6	32.4	12.0	107.4	198.7	192.9	108.6
Queue Length 50th (ft)	19	395	7	1021	145	26	~561	~526	26
Queue Length 95th (ft)	39	465	19	1226	241	59	m#768	m#732	59
Internal Link Dist (ft)		810		1204		100		99	220
Turn Bay Length (ft)	260		140						
Base Capacity (vph)	182	3407	301	2314	1089	80	249	241	130
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.21	0.41	0.05	0.75	0.33	0.23	1.22	1.20	0.14

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2022 Baseline PM
08/09/2023




Movement	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations	↖	↑↑↑					↑↑	↖		↕		↖
Traffic Volume (vph)	36	1259	4	8	9	5	1588	334	6	2	8	453
Future Volume (vph)	36	1259	4	8	9	5	1588	334	6	2	8	453
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0					6.0	6.0	6.0	5.0		5.3
Lane Util. Factor	1.00	0.91					1.00	0.95	1.00	1.00		0.95
Frbp, ped/bikes	1.00	1.00					1.00	1.00	1.00	1.00		1.00
Flpb, ped/bikes	1.00	1.00					1.00	1.00	1.00	1.00		1.00
Frt	1.00	1.00					1.00	1.00	0.85	0.93		1.00
Flt Protected	0.95	1.00					0.95	1.00	1.00	0.98		0.95
Satd. Flow (prot)	1770	5074					1770	3539	1583	1704		1681
Flt Permitted	0.06	1.00					0.15	1.00	1.00	0.98		0.95
Satd. Flow (perm)	107	5074					284	3539	1583	1704		1681
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	39	1368	4	9	10	5	1726	363	7	2	9	492
RTOR Reduction (vph)	0	0	0	0	0	0	0	59	0	0	0	0
Lane Group Flow (vph)	39	1381	0	0	0	15	1726	304	0	18	0	305
Confl. Peds. (#/hr)			2	2	2	2						
Confl. Bikes (#/hr)			2	2								
Heavy Vehicles (%)	2%	2%	2%	10%	2%	2%	2%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Split	NA		Split
Protected Phases	5	2			1	1	6		7	7		3
Permitted Phases	2				6	6		6				
Actuated Green, G (s)	143.3	137.1					138.9	134.9	134.9	5.6		30.7
Effective Green, g (s)	147.3	139.1					142.9	136.9	136.9	7.6		32.7
Actuated g/C Ratio	0.67	0.63					0.65	0.62	0.62	0.03		0.15
Clearance Time (s)	8.0	8.0					8.0	8.0	8.0	7.0		7.3
Vehicle Extension (s)	3.0	5.0					3.0	5.0	5.0	3.0		5.0
Lane Grp Cap (vph)	133	3208					224	2202	985	58		249
v/s Ratio Prot	c0.01	0.27					0.00	c0.49		c0.01		c0.18
v/s Ratio Perm	0.18						0.04		0.19			
v/c Ratio	0.29	0.43					0.07	0.78	0.31	0.31		1.22
Uniform Delay, d1	29.8	20.4					14.9	30.6	19.4	103.6		93.7
Progression Factor	1.00	1.00					1.00	1.00	1.00	1.00		0.95
Incremental Delay, d2	1.2	0.4					0.1	2.9	0.8	3.0		131.2
Delay (s)	31.0	20.9					15.1	33.5	20.2	106.7		220.3
Level of Service	C	C					B	C	C	F		F
Approach Delay (s)		21.1					31.1			106.7		
Approach LOS		C					C			F		

Intersection Summary

HCM 2000 Control Delay	54.9	HCM 2000 Level of Service	D
HCM 2000 Volume to Capacity ratio	0.83		
Actuated Cycle Length (s)	220.0	Sum of lost time (s)	32.9
Intersection Capacity Utilization	83.4%	ICU Level of Service	E
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2022 Baseline PM
 08/09/2023



Movement	SBT	SBR	SBR2	NEL2	NEL	NER
Lane Configurations						
Traffic Volume (vph)	3	4	88	5	3	9
Future Volume (vph)	3	4	88	5	3	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.3				4.6	
Lane Util. Factor	0.95				1.00	
Frbp, ped/bikes	1.00				1.00	
Flpb, ped/bikes	1.00				1.00	
Frt	0.95				0.93	
Flt Protected	0.97				0.98	
Satd. Flow (prot)	1624				1563	
Flt Permitted	0.97				0.98	
Satd. Flow (perm)	1624				1563	
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	3	4	96	5	3	10
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	290	0	0	0	18	0
Confl. Peds. (#/hr)						
Confl. Bikes (#/hr)						
Heavy Vehicles (%)	2%	10%	2%	10%	10%	10%
Turn Type	NA			Prot	Prot	
Protected Phases	3			4	4	
Permitted Phases						
Actuated Green, G (s)	30.7				5.7	
Effective Green, g (s)	32.7				7.7	
Actuated g/C Ratio	0.15				0.04	
Clearance Time (s)	7.3				6.6	
Vehicle Extension (s)	5.0				3.0	
Lane Grp Cap (vph)	241				54	
v/s Ratio Prot	0.18				c0.01	
v/s Ratio Perm						
v/c Ratio	1.20				0.33	
Uniform Delay, d1	93.7				103.6	
Progression Factor	0.95				1.00	
Incremental Delay, d2	123.8				3.6	
Delay (s)	213.0				107.3	
Level of Service	F				F	
Approach Delay (s)	216.7				107.3	
Approach LOS	F				F	
Intersection Summary						

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place


2022 Baseline PM
 08/09/2023



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔			↔↔			↑	↗		↔	
Traffic Volume (veh/h)	44	352	25	8	566	3	15	1	6	33	0	187
Future Volume (Veh/h)	44	352	25	8	566	3	15	1	6	33	0	187
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.92	0.92	0.90	0.90	0.92	0.92	0.92	0.90	0.92	0.90
Hourly flow rate (vph)	49	391	27	9	629	3	16	1	7	37	0	208
Pedestrians					2			8			5	
Lane Width (ft)					12.0			12.0			12.0	
Walking Speed (ft/s)					4.0			4.0			4.0	
Percent Blockage					0			1			0	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)		567			1199							
pX, platoon unblocked				0.95			0.95	0.95	0.95	0.95	0.95	
vC, conflicting volume	637			426			1051	1166	219	956	1178	321
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	637			290			948	1068	72	848	1081	321
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	95			99			88	99	99	84	100	69
cM capacity (veh/h)	939			1197			133	195	919	225	191	672
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1					
Volume Total	244	222	324	318	17	7	245					
Volume Left	49	0	9	0	16	0	37					
Volume Right	0	27	0	3	0	7	208					
cSH	939	1700	1197	1700	135	919	517					
Volume to Capacity	0.05	0.13	0.01	0.19	0.13	0.01	0.47					
Queue Length 95th (ft)	4	0	1	0	10	1	63					
Control Delay (s)	2.2	0.0	0.3	0.0	35.4	8.9	18.1					
Lane LOS	A		A		E	A	C					
Approach Delay (s)	1.2		0.1		27.7		18.1					
Approach LOS					D		C					
Intersection Summary												
Average Delay			4.2									
Intersection Capacity Utilization			58.2%		ICU Level of Service				B			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
4: Eaton Place & Wwest Driveway

2022 Baseline PM
08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↗		↘↘	
Traffic Volume (veh/h)	13	378	526	8	48	58
Future Volume (Veh/h)	13	378	526	8	48	58
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	14	420	584	9	53	64
Pedestrians		1			6	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			1	
Right turn flare (veh)						
Median type		None	None			
Median storage veh						
Upstream signal (ft)		857	909			
pX, platoon unblocked						
vC, conflicting volume	599				832	304
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	599				832	304
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				82	91
cM capacity (veh/h)	969				301	688
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	154	280	389	204	117	
Volume Left	14	0	0	0	53	
Volume Right	0	0	0	9	64	
cSH	969	1700	1700	1700	435	
Volume to Capacity	0.01	0.16	0.23	0.12	0.27	
Queue Length 95th (ft)	1	0	0	0	27	
Control Delay (s)	0.9	0.0	0.0	0.0	16.3	
Lane LOS	A				C	
Approach Delay (s)	0.3		0.0		16.3	
Approach LOS					C	
Intersection Summary						
Average Delay			1.8			
Intersection Capacity Utilization			33.1%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
5: Eaton Place & Middle Driveway

2022 Baseline PM
08/09/2023




Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	8	419	512	6	19	22
Future Volume (Veh/h)	8	419	512	6	19	22
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	9	466	569	7	21	24
Pedestrians			1		8	
Lane Width (ft)			12.0		12.0	
Walking Speed (ft/s)			4.0		4.0	
Percent Blockage			0		1	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		1145	621			
pX, platoon unblocked						
vC, conflicting volume	584				832	296
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	584				832	296
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				93	97
cM capacity (veh/h)	980				302	696
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	164	311	379	197	45	
Volume Left	9	0	0	0	21	
Volume Right	0	0	0	7	24	
cSH	980	1700	1700	1700	433	
Volume to Capacity	0.01	0.18	0.22	0.12	0.10	
Queue Length 95th (ft)	1	0	0	0	9	
Control Delay (s)	0.6	0.0	0.0	0.0	14.3	
Lane LOS	A				B	
Approach Delay (s)	0.2		0.0		14.3	
Approach LOS					B	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			27.3%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
6: Eaton Place & East Driveway

2022 Baseline PM
08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	11	427	403	23	92	114
Future Volume (Veh/h)	11	427	403	23	92	114
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	12	474	448	26	102	127
Pedestrians		1			3	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)			307			
pX, platoon unblocked						
vC, conflicting volume	477				725	241
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	477				725	241
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				71	83
cM capacity (veh/h)	1079				355	757
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	170	316	299	175	229	
Volume Left	12	0	0	0	102	
Volume Right	0	0	0	26	127	
cSH	1079	1700	1700	1700	503	
Volume to Capacity	0.01	0.19	0.18	0.10	0.45	
Queue Length 95th (ft)	1	0	0	0	59	
Control Delay (s)	0.7	0.0	0.0	0.0	18.0	
Lane LOS	A				C	
Approach Delay (s)	0.2		0.0		18.0	
Approach LOS					C	
Intersection Summary						
Average Delay			3.6			
Intersection Capacity Utilization			38.6%		ICU Level of Service	A
Analysis Period (min)			15			



















Lane Group	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	559	893	20	183
v/c Ratio	0.27	1.29	0.33	1.32
Control Delay	3.3	207.7	109.5	238.7
Queue Delay	4.9	0.6	0.0	0.0
Total Delay	8.2	208.3	109.5	238.7
Queue Length 50th (ft)	23	-868	26	-308
Queue Length 95th (ft)	m24	#950	61	#474
Internal Link Dist (ft)	47	487	120	220
Turn Bay Length (ft)				
Base Capacity (vph)	2092	693	71	139
Starvation Cap Reductn	1446	0	0	0
Spillback Cap Reductn	0	59	0	0
Storage Cap Reductn	0	0	0	0
Reduced v/c Ratio	0.87	1.41	0.28	1.32

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
7: Willow Crescent Dr & Oak Place/Eaton Place

2022 Baseline PM
08/09/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	148	337	2	2	731	44	4	11	2	35	20	104
Future Volume (vph)	148	337	2	2	731	44	4	11	2	35	20	104
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		6.8			4.5			4.5			5.0	
Lane Util. Factor		0.95			0.95			1.00			1.00	
Frbp, ped/bikes		1.00			1.00			0.99			1.00	
Flpb, ped/bikes		1.00			1.00			1.00			1.00	
Frt		1.00			0.99			0.99			0.91	
Flt Protected		0.99			1.00			0.99			0.99	
Satd. Flow (prot)		3484			3503			1801			1679	
Flt Permitted		0.99			0.95			0.99			0.99	
Satd. Flow (perm)		3484			3342			1801			1679	
Peak-hour factor, PHF	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Adj. Flow (vph)	170	387	2	2	840	51	5	13	2	40	23	120
RTOR Reduction (vph)	0	0	0	0	2	0	0	2	0	0	31	0
Lane Group Flow (vph)	0	559	0	0	891	0	0	18	0	0	152	0
Confl. Peds. (#/hr)	3		2	2		3			7	7		
Turn Type	Split	NA		Perm	NA		Split	NA		Split	NA	
Protected Phases	1 2 3	1 2 3			4		7	7		8	8	
Permitted Phases				4								
Actuated Green, G (s)		132.2			45.5			7.3			14.2	
Effective Green, g (s)		125.3			45.5			7.3			14.2	
Actuated g/C Ratio		0.57			0.21			0.03			0.06	
Clearance Time (s)					4.5			4.5			5.0	
Vehicle Extension (s)					5.5			2.0			2.0	
Lane Grp Cap (vph)		1984			691			59			108	
v/s Ratio Prot		c0.16						c0.01			c0.09	
v/s Ratio Perm					c0.27							
v/c Ratio		0.28			1.29			0.31			1.41	
Uniform Delay, d1		24.3			87.2			103.9			102.9	
Progression Factor		0.15			1.08			1.00			1.00	
Incremental Delay, d2		0.0			140.7			1.1			229.8	
Delay (s)		3.7			235.4			105.0			332.7	
Level of Service		A			F			F			F	
Approach Delay (s)		3.7			235.4			105.0			332.7	
Approach LOS		A			F			F			F	
Intersection Summary												
HCM 2000 Control Delay			166.3									F
HCM 2000 Volume to Capacity ratio			0.63									
Actuated Cycle Length (s)			220.0						34.5			
Intersection Capacity Utilization			61.8%									B
Analysis Period (min)			15									
c Critical Lane Group												

City of Fairfax Signal Coordination Timing - East Fairfax Blvd

Intersection # **32** Name: **Chain Bridge (123) & Eaton / Norman**
 Group: East FFX Primary: Rte 123

Type: Semi-Actuated Peds: EB (4), NB (2)
 Ring: Side-Street Alt. Sequential (4783) - In ring structure
 Overlaps: WB 2nd heads (A=4+7+8)

Coordination Timing

	AM	MD	PM	Offpeak	Night	WE
TACTICS Pattern	1/2/1	2/2/1	3/2/1			4/2/1
Splits/Cycle	190	150	220	Free	Free	150
1	40	23	35			15
2	51	45	84			46
3	30	16	20			20
4	39	39	50			39
5	25	15	30			20
6	66	53	89			41
7	15	12	13			15
8	15	15	18			15
Offset (BOG)	40	83	87			91
Coord Phases	2&6	2&6	2&6			2&6
Rev. Phases						
Alt Seq						

Phase Timing

Phase	Direction	Min Green	Gap	Walk	FDW	Max 1	Max 2	Amber	All Red	Notes
1	SBLT	5.0	3.0			30	30	4.0	2.8	
2	NB	5.0	3.0	7	14	40	70	4.0	2.8	Max
3	EB	5.0	3.5			30	30	3.5	3.4	
4	WB	5.0	5.5	7	26	25	40	3.5	1.0	
5	NBLT	5.0	3.0			15	15	4.0	2.8	Max
6	SB	5.0	3.0			40	70	4.0	2.8	
7	NB Serv	5.0	2.0			15	15	3.5	1.0	
8	SB Serv	5.0	2.0			15	25	4.0	1.0	

AM: 6-10 M-F New clearances installed 10/31/13

Adjusted 1/16/14

MD: 10-14:45 M-F

PM: 14:45-19 M-F

WE: 10-20 Sat, 12-20 Sun

Free all other times.

Holidays run MD plan 8 AM to 8 PM, Free before 8 AM and after 8 PM

City of Fairfax Signal Coordination Timing - East Fairfax Blvd

Intersection # **34** Name: **Fairfax Blvd.(Lee Hwy) & Eaton**
 Group: East FFX Primary: Fairfax Blvd.

Type: Semi-Actuated Peds: SB (3),WB(6)
 Ring: Side-Street Sequential (347)
 Overlaps: None

Coordination Timing						
	AM	MD	PM	Offpeak	Night	WE
TACTICS Pattern	1/2/1	2/2/1	3/2/1			4/2/1
Splits/Cycle	190	150	220	Free	Free	150
1	15	15	21			15
2	84	63	124			64
3	51	35	38			32
4	25	23	23			25
5	25	25	20			20
6	74	53	125			59
7	15	14	14			14
8	0	0	0			0
Offset (BOG)	116	147	186			20
Coord Phases	2&6	2&6	2&6			2&6
Rev. Phases						
Alt Seq						

Phase Timing

Phase	Direction	Min Green	Gap	Walk	FDW	Max 1	Max 2	Amber	All Red	Notes
1	WBLT	5.0	3.0			15	15	4.1	3.9	
2	EB	15.0	5.0			55	60	4.1	3.9	Max
3	SB	5.0	5.0	7	1.7	25	40	3.5	3.8	
4	NB R Lob	5.0	3.0			15	15	3.5	3.1	
5	EBLT	5.0	3.0			15	15	4.1	3.9	
6	WB	15.0	5.0	7	1.5	55	60	4.1	3.9	Max
7	NB Auto	5.0	3.0			10	10	3.4	3.6	
8	n/a									


AM: 6-10 M-F
 MD: 10-14:45 M-F
 PM: 14:45-19 M-F
 WE: 10-20 Sat, 12-20 Sun

Free all other times.
 No longer flashes at night Jan 2017
 Holidays run MD plan 8 AM to 8 PM, Free before 8 AM and after 8 PM

APPENDIX D

Individual Pipeline Development Trip Assignments



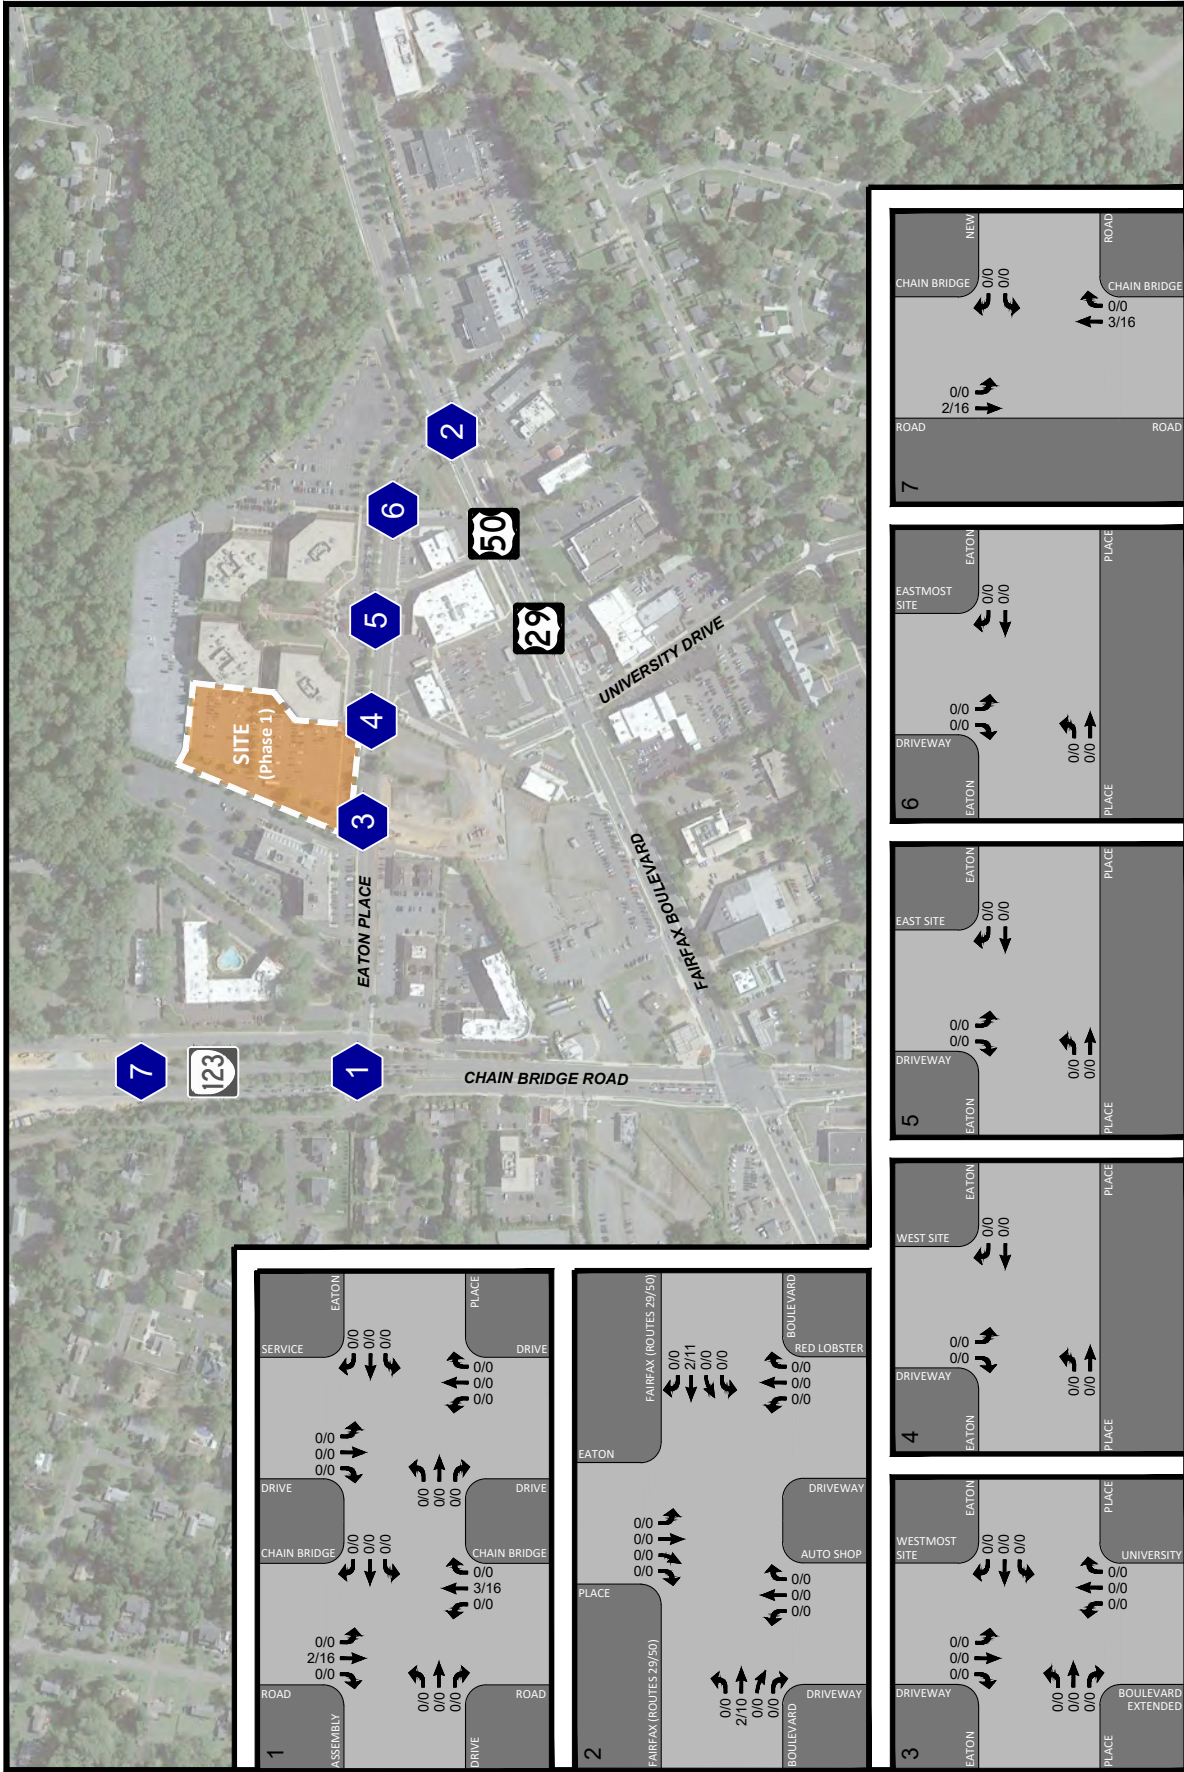



 NORTH
 N29 Willowwood
 City of Fairfax, Virginia

Figure D-1
 Brezeway Property Trips

 AM PEAK HOUR
 PM PEAK HOUR
 000 / 000



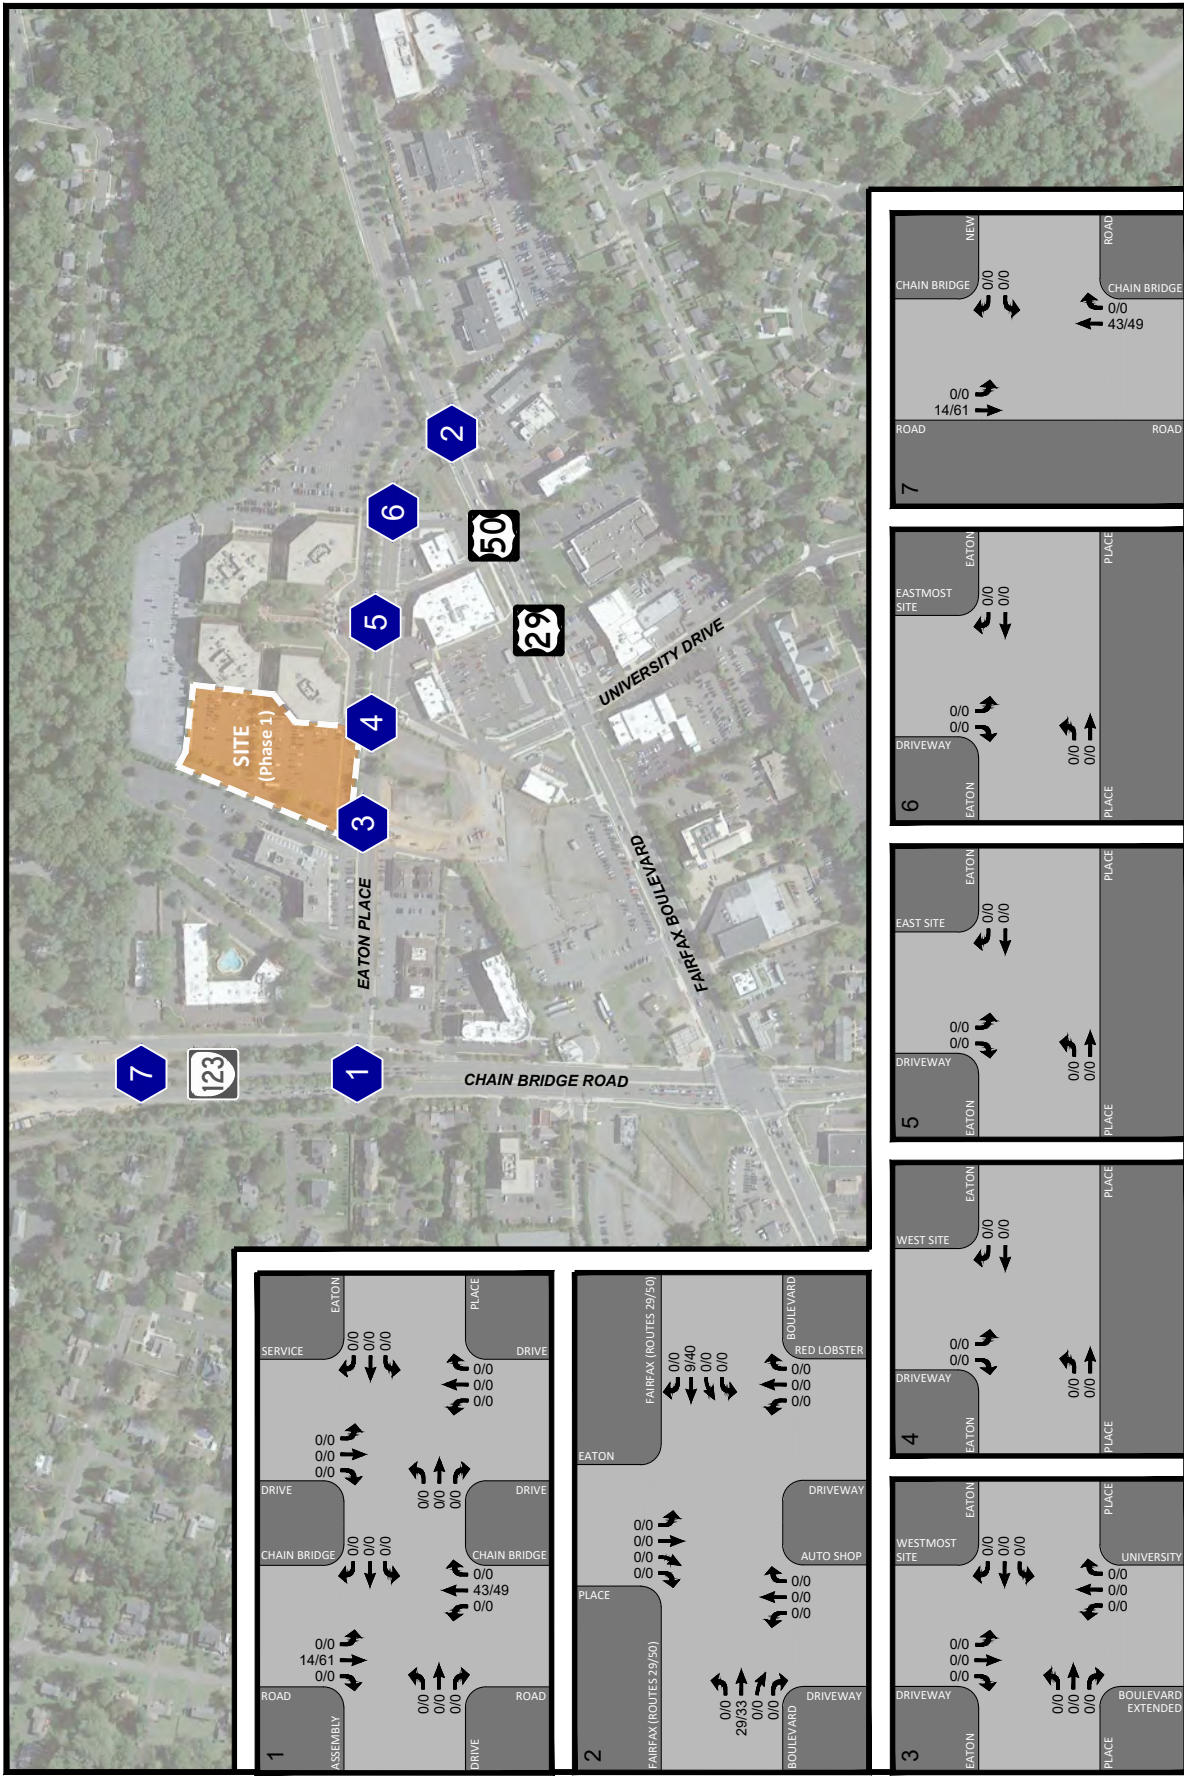


 NORTH
 N29 Willowwood
 City of Fairfax, Virginia

 AM PEAK HOUR
 PM PEAK HOUR
 000 / 000

Figure D-3
 Paul VI Redevelopment Trips



APPENDIX E

Background Future Capacity Analysis Worksheets



1: Chain Bridge Road & Norman Avenue/Oak Place

08/09/2023



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	154	211	187	11	1222	501	1019
v/c Ratio	0.64	0.36	0.29	0.13	1.02	1.37	0.48
Control Delay	88.9	3.5	1.0	89.7	99.3	223.4	47.8
Queue Delay	0.1	2.1	2.3	0.0	0.0	0.0	0.0
Total Delay	89.0	5.7	3.3	89.7	99.3	223.4	47.8
Queue Length 50th (ft)	180	7	0	14	-587	-773	361
Queue Length 95th (ft)	269	m12	m0	39	#684	#1018	465
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	239	587	645	188	1203	366	2140
Starvation Cap Reductn	0	250	336	0	0	0	0
Spillback Cap Reductn	1	25	22	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.65	0.63	0.61	0.06	1.02	1.37	0.48






















Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Background AM

08/09/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	47	71	26	102	62	210	10	945	204	471	936	22
Future Volume (vph)	47	71	26	102	62	210	10	945	204	471	936	22
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8	
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		1.00	0.91	
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00	
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00	
Frt		0.98			0.97	0.85	1.00	0.97		1.00	1.00	
Flt Protected		0.98			0.97	1.00	0.95	1.00		0.95	1.00	
Satd. Flow (prot)		1784			1677	1504	1770	4950		1770	5068	
Flt Permitted		0.98			0.97	1.00	0.95	1.00		0.08	1.00	
Satd. Flow (perm)		1784			1677	1504	1770	4950		146	5068	
Peak-hour factor, PHF	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Adj. Flow (vph)	50	76	28	109	66	223	11	1005	217	501	996	23
RTOR Reduction (vph)	0	4	0	0	4	122	0	0	0	0	0	0
Lane Group Flow (vph)	0	150	0	0	207	65	11	1222	0	501	1019	0
Confl. Peds. (#/hr)	1					1						
Confl. Bikes (#/hr)			1									
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		pm+pt	NA	
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6	
Permitted Phases										6		
Actuated Green, G (s)		23.1			64.0	64.0	3.3	44.2		84.2	74.1	
Effective Green, g (s)		25.1			66.0	66.0	5.3	46.2		86.2	76.1	
Actuated g/C Ratio		0.13			0.35	0.35	0.03	0.24		0.45	0.40	
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8	
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0	
Lane Grp Cap (vph)		235			582	522	49	1203		367	2029	
v/s Ratio Prot		c0.08			c0.12	0.04	0.01	0.25		c0.25	0.20	
v/s Ratio Perm										c0.37		
v/c Ratio		0.64			0.36	0.12	0.22	1.02		1.37	0.50	
Uniform Delay, d1		78.1			46.2	42.3	90.3	71.9		64.2	42.7	
Progression Factor		1.00			0.05	0.01	1.00	1.00		0.94	1.16	
Incremental Delay, d2		5.8			0.7	0.2	2.3	29.9		179.0	0.8	
Delay (s)		83.9			3.0	0.7	92.7	101.8		239.3	50.2	
Level of Service		F			A	A	F	F		F	D	
Approach Delay (s)		83.9			1.9			101.8			112.5	
Approach LOS		F			A			F			F	
Intersection Summary												
HCM 2000 Control Delay			93.9									F
HCM 2000 Volume to Capacity ratio			0.97									
Actuated Cycle Length (s)			190.0							30.5		
Intersection Capacity Utilization			85.9%									E
Analysis Period (min)			15									

c Critical Lane Group



Lane Group	EBL	EBT	WBL	WBT	WBR	NBT	SBL	SBT	NEL
Lane Group Flow (vph)	103	1869	11	1112	374	4	199	194	6
v/c Ratio	0.31	0.52	0.06	0.49	0.35	0.05	0.70	0.69	0.08
Control Delay	12.0	17.1	12.8	21.9	9.7	88.0	109.8	109.1	88.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	12.0	17.1	12.8	21.9	9.7	88.0	109.8	109.1	88.8
Queue Length 50th (ft)	28	278	3	316	70	5	244	238	7
Queue Length 95th (ft)	88	689	16	641	216	18	m314	m308	26
Internal Link Dist (ft)		810		1204		100		99	220
Turn Bay Length (ft)	260		140						
Base Capacity (vph)	384	3610	179	2283	1080	89	404	400	173
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.27	0.52	0.06	0.49	0.35	0.04	0.49	0.48	0.03


Intersection Summary

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Background AM

08/09/2023



Movement	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations	↖	↕↕↕					↕↕	↖		↕↕		↖
Traffic Volume (vph)	89	1603	2	3	8	2	956	322	2	0	2	317
Future Volume (vph)	89	1603	2	3	8	2	956	322	2	0	2	317
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0					6.0	6.0	6.0	5.0		5.3
Lane Util. Factor	1.00	0.91					1.00	0.95	1.00	1.00		0.95
Frbp, ped/bikes	1.00	1.00					1.00	1.00	0.99	1.00		1.00
Flpb, ped/bikes	1.00	1.00					1.00	1.00	1.00	1.00		1.00
Frt	1.00	1.00					1.00	1.00	0.85	0.93		1.00
Flt Protected	0.95	1.00					0.95	1.00	1.00	0.98		0.95
Satd. Flow (prot)	1770	5082					1770	3539	1560	1695		1681
Flt Permitted	0.17	1.00					0.08	1.00	1.00	0.98		0.95
Satd. Flow (perm)	324	5082					149	3539	1560	1695		1681
Peak-hour factor, PHF	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
Adj. Flow (vph)	103	1864	2	3	9	2	1112	374	2	0	2	369
RTOR Reduction (vph)	0	0	0	0	0	0	0	86	0	0	0	0
Lane Group Flow (vph)	103	1869	0	0	0	11	1112	288	0	4	0	199
Confl. Peds. (#/hr)	1		1	1	1	1		1				
Confl. Bikes (#/hr)			1	1								
Heavy Vehicles (%)	2%	2%	2%	10%	2%	2%	2%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Split	NA		Split
Protected Phases	5	2			1	1	6		7	7		3
Permitted Phases	2				6	6		6				
Actuated Green, G (s)	127.3	117.2					112.3	109.7	109.7	1.5		30.2
Effective Green, g (s)	129.8	119.2					116.3	111.7	111.7	3.5		32.2
Actuated g/C Ratio	0.68	0.63					0.61	0.59	0.59	0.02		0.17
Clearance Time (s)	8.0	8.0					8.0	8.0	8.0	7.0		7.3
Vehicle Extension (s)	3.0	5.0					3.0	5.0	5.0	3.0		5.0
Lane Grp Cap (vph)	313	3188					130	2080	917	31		284
v/s Ratio Prot	c0.02	c0.37					0.00	0.31		c0.00		c0.12
v/s Ratio Perm	0.20						0.05		0.18			
v/c Ratio	0.33	0.59					0.08	0.53	0.31	0.13		0.70
Uniform Delay, d1	14.9	20.9					16.9	23.5	19.8	91.8		74.4
Progression Factor	1.00	1.00					1.00	1.00	1.00	1.00		1.32
Incremental Delay, d2	0.6	0.8					0.3	1.0	0.9	1.9		8.9
Delay (s)	15.5	21.7					17.2	24.5	20.7	93.6		107.2
Level of Service	B	C					B	C	C	F		F
Approach Delay (s)		21.3					23.5			93.6		
Approach LOS		C					C			F		

Intersection Summary			
HCM 2000 Control Delay	31.0	HCM 2000 Level of Service	C
HCM 2000 Volume to Capacity ratio	0.61		
Actuated Cycle Length (s)	190.0	Sum of lost time (s)	32.9
Intersection Capacity Utilization	73.7%	ICU Level of Service	D
Analysis Period (min)	15		
c	Critical Lane Group		

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Background AM
 08/09/2023




















Movement	SBT	SBR2	NEL2	NEL	NER
Lane Configurations					
Traffic Volume (vph)	2	19	4	0	1
Future Volume (vph)	2	19	4	0	1
Ideal Flow (vphp)	1900	1900	1900	1900	1900
Total Lost time (s)	5.3			4.6	
Lane Util. Factor	0.95			1.00	
Frbp, ped/bikes	1.00			1.00	
Flpb, ped/bikes	1.00			1.00	
Frt	0.98			0.98	
Flt Protected	0.96			0.96	
Satd. Flow (prot)	1666			1621	
Flt Permitted	0.96			0.96	
Satd. Flow (perm)	1666			1621	
Peak-hour factor, PHF	0.86	0.86	0.86	0.86	0.86
Adj. Flow (vph)	2	22	5	0	1
RTOR Reduction (vph)	0	0	0	0	0
Lane Group Flow (vph)	194	0	0	6	0
Confl. Peds. (#/hr)					
Confl. Bikes (#/hr)					
Heavy Vehicles (%)	2%	2%	10%	10%	10%
Turn Type	NA		Prot	Prot	
Protected Phases	3		4	4	
Permitted Phases					
Actuated Green, G (s)	30.2			1.6	
Effective Green, g (s)	32.2			3.6	
Actuated g/C Ratio	0.17			0.02	
Clearance Time (s)	7.3			6.6	
Vehicle Extension (s)	5.0			3.0	
Lane Grp Cap (vph)	282			30	
v/s Ratio Prot	0.12			c0.00	
v/s Ratio Perm					
v/c Ratio	0.69			0.20	
Uniform Delay, d1	74.2			91.8	
Progression Factor	1.32			1.00	
Incremental Delay, d2	8.2			3.3	
Delay (s)	106.2			95.1	
Level of Service	F			F	
Approach Delay (s)	106.7			95.1	
Approach LOS	F			F	
Intersection Summary					

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place

2026 Background AM

08/09/2023


												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	276	517	13	3	252	11	6	4	3	4	0	29
Future Volume (Veh/h)	276	517	13	3	252	11	6	4	3	4	0	29
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.85	0.85	0.92	0.92	0.85	0.85	0.92	0.92	0.92	0.85	0.92	0.85
Hourly flow rate (vph)	325	608	14	3	296	13	7	4	3	5	0	34
Pedestrians					1			2				
Lane Width (ft)					12.0			12.0				
Walking Speed (ft/s)					4.0			4.0				
Percent Blockage					0			0				
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)		567			1199							
pX, platoon unblocked				0.86			0.86	0.86	0.86	0.86	0.86	
vC, conflicting volume	309			624			1455	1582	314	1268	1582	154
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	309			240			1205	1353	0	989	1353	154
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	74			100			92	96	100	96	100	96
cM capacity (veh/h)	1248			1138			92	94	931	133	94	864
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1					
Volume Total	629	318	151	161	11	3	39					
Volume Left	325	0	3	0	7	0	5					
Volume Right	0	14	0	13	0	3	34					
cSH	1248	1700	1138	1700	93	931	507					
Volume to Capacity	0.26	0.19	0.00	0.09	0.12	0.00	0.08					
Queue Length 95th (ft)	26	0	0	0	10	0	6					
Control Delay (s)	6.0	0.0	0.2	0.0	49.0	8.9	12.7					
Lane LOS	A		A		E	A	B					
Approach Delay (s)	4.0		0.1		40.4		12.7					
Approach LOS					E		B					
Intersection Summary												
Average Delay			3.7									
Intersection Capacity Utilization			45.8%	ICU Level of Service	A							
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis

4: Eaton Place & Wwest Driveway

2026 Background AM

08/09/2023




Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	43	481	259	53	6	8
Future Volume (Veh/h)	43	481	259	53	6	8
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	51	566	305	62	7	9
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		857	909			
pX, platoon unblocked					0.93	
vC, conflicting volume	368				722	184
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	368				554	184
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	96				98	99
cM capacity (veh/h)	1186				412	826
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	240	377	203	164	16	
Volume Left	51	0	0	0	7	
Volume Right	0	0	0	62	9	
cSH	1186	1700	1700	1700	573	
Volume to Capacity	0.04	0.22	0.12	0.10	0.03	
Queue Length 95th (ft)	3	0	0	0	2	
Control Delay (s)	2.0	0.0	0.0	0.0	11.5	
Lane LOS	A				B	
Approach Delay (s)	0.8		0.0		11.5	
Approach LOS					B	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			36.9%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis

5: Eaton Place & Middle Driveway

2026 Background AM

08/09/2023




Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↔↔	↔↔		↔↔	
Traffic Volume (veh/h)	43	444	307	23	6	5
Future Volume (Veh/h)	43	444	307	23	6	5
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	51	522	361	27	7	6
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		1145	621			
pX, platoon unblocked						
vC, conflicting volume	389				738	195
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	389				738	195
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	96				98	99
cM capacity (veh/h)	1165				337	813
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	225	348	241	147	13	
Volume Left	51	0	0	0	7	
Volume Right	0	0	0	27	6	
cSH	1165	1700	1700	1700	462	
Volume to Capacity	0.04	0.20	0.14	0.09	0.03	
Queue Length 95th (ft)	3	0	0	0	2	
Control Delay (s)	2.2	0.0	0.0	0.0	13.0	
Lane LOS	A				B	
Approach Delay (s)	0.9		0.0		13.0	
Approach LOS					B	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			36.2%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis


6: Eaton Place & East Driveway

2026 Background AM

08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↕↔	
Traffic Volume (veh/h)	70	378	313	126	13	17
Future Volume (Veh/h)	70	378	313	126	13	17
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	82	445	368	148	15	20
Pedestrians		1			2	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)			307			
pX, platoon unblocked						
vC, conflicting volume	518				830	261
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	518				830	261
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	92				95	97
cM capacity (veh/h)	1042				284	736
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	230	297	245	271	35	
Volume Left	82	0	0	0	15	
Volume Right	0	0	0	148	20	
cSH	1042	1700	1700	1700	437	
Volume to Capacity	0.08	0.17	0.14	0.16	0.08	
Queue Length 95th (ft)	6	0	0	0	6	
Control Delay (s)	3.6	0.0	0.0	0.0	14.0	
Lane LOS	A				B	
Approach Delay (s)	1.6		0.0		14.0	
Approach LOS					B	
Intersection Summary						
Average Delay			1.2			
Intersection Capacity Utilization			38.9%		ICU Level of Service	A
Analysis Period (min)			15			



Lane Group	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	857	353	13	159
v/c Ratio	0.40	0.65	0.23	0.78
Control Delay	3.3	83.5	62.5	87.0
Queue Delay	51.8	0.0	0.0	0.0
Total Delay	55.1	83.5	62.5	87.0
Queue Length 50th (ft)	36	197	6	155
Queue Length 95th (ft)	m31	274	32	#331
Internal Link Dist (ft)	47	487	120	220
Turn Bay Length (ft)				
Base Capacity (vph)	2124	636	98	203
Starvation Cap Reductn	1387	0	0	0
Spillback Cap Reductn	0	0	0	0
Storage Cap Reductn	0	0	0	0
Reduced v/c Ratio	1.16	0.56	0.13	0.78

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

















Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
7: Willow Cresent Dr & Oak Place/Eaton Place

2026 Background AM

08/09/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	3	740	3	0	282	25	2	3	7	43	8	88
Future Volume (vph)	3	740	3	0	282	25	2	3	7	43	8	88
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		6.8			4.5			4.5			5.0	
Lane Util. Factor		0.95			0.95			1.00			1.00	
Frbp, ped/bikes		1.00			1.00			0.96			0.99	
Flpb, ped/bikes		1.00			1.00			1.00			1.00	
Frt		1.00			0.99			0.92			0.91	
Flt Protected		1.00			1.00			0.99			0.98	
Satd. Flow (prot)		3536			3488			1621			1658	
Flt Permitted		1.00			1.00			0.99			0.98	
Satd. Flow (perm)		3536			3488			1621			1658	
Peak-hour factor, PHF	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Adj. Flow (vph)	3	851	3	0	324	29	2	3	8	49	9	101
RTOR Reduction (vph)	0	0	0	0	3	0	0	8	0	0	31	0
Lane Group Flow (vph)	0	857	0	0	350	0	0	5	0	0	128	0
Confl. Peds. (#/hr)	2		5	5		2			6	6		
Confl. Bikes (#/hr)			1									3
Turn Type	Split	NA			NA		Split	NA		Split	NA	
Protected Phases	1 2 3	1 2 3			4		7	7		8	8	
Permitted Phases				4								
Actuated Green, G (s)		114.2			29.5			5.7			19.8	
Effective Green, g (s)		107.3			29.5			5.7			19.8	
Actuated g/C Ratio		0.56			0.16			0.03			0.10	
Clearance Time (s)					4.5			4.5			5.0	
Vehicle Extension (s)					5.5			2.0			2.0	
Lane Grp Cap (vph)		1996			541			48			172	
v/s Ratio Prot		c0.24			c0.10			c0.00			c0.08	
v/s Ratio Perm												
v/c Ratio		0.43			0.65			0.11			0.74	
Uniform Delay, d1		23.8			75.4			89.7			82.6	
Progression Factor		0.16			1.05			1.00			1.00	
Incremental Delay, d2		0.0			3.9			0.4			14.0	
Delay (s)		3.8			83.0			90.0			96.6	
Level of Service		A			F			F			F	
Approach Delay (s)		3.8			83.0			90.0			96.6	
Approach LOS		A			F			F			F	
Intersection Summary												
HCM 2000 Control Delay			35.5									D
HCM 2000 Volume to Capacity ratio			0.52									
Actuated Cycle Length (s)			190.0						34.5			
Intersection Capacity Utilization			46.8%									A
Analysis Period (min)			15									
c Critical Lane Group												

Queues
8: Chain Bridge Road & New Road



Lane Group	WBL	WBR	NBT	SBL	SBT
Lane Group Flow (vph)	3	68	1307	48	1550
v/c Ratio	0.03	0.44	0.33	0.49	0.51
Control Delay	78.7	23.3	34.2	102.6	4.8
Queue Delay	0.0	0.0	0.7	0.0	0.0
Total Delay	78.7	23.3	35.0	102.6	4.8
Queue Length 50th (ft)	4	0	559	59	172
Queue Length 95th (ft)	15	52	m568	109	417
Internal Link Dist (ft)	173		608		231
Turn Bay Length (ft)				200	
Base Capacity (vph)	251	283	3939	158	3033
Starvation Cap Reductn	0	0	2149	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.01	0.24	0.73	0.30	0.51

Intersection Summary

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis

8: Chain Bridge Road & New Road

2026 Background AM

08/09/2023



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↰	↱	↑↑↑		↰	↱↱
Traffic Volume (vph)	3	63	1200	3	44	1426
Future Volume (vph)	3	63	1200	3	44	1426
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	8.0	8.0	8.0		8.0	8.0
Lane Util. Factor	1.00	1.00	0.91		1.00	0.95
Frt	1.00	0.85	1.00		1.00	1.00
Flt Protected	0.95	1.00	1.00		0.95	1.00
Satd. Flow (prot)	1770	1583	5084		1770	3539
Flt Permitted	0.95	1.00	1.00		0.95	1.00
Satd. Flow (perm)	1770	1583	5084		1770	3539
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	3	68	1304	3	48	1550
RTOR Reduction (vph)	0	64	0	0	0	0
Lane Group Flow (vph)	3	4	1307	0	48	1550
Turn Type	Prot	Perm	NA		Prot	NA
Protected Phases	8		2		1	6
Permitted Phases		8				
Actuated Green, G (s)	11.2	11.2	145.6		9.2	162.8
Effective Green, g (s)	11.2	11.2	145.6		9.2	162.8
Actuated g/C Ratio	0.06	0.06	0.77		0.05	0.86
Clearance Time (s)	8.0	8.0	8.0		8.0	8.0
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0
Lane Grp Cap (vph)	104	93	3895		85	3032
v/s Ratio Prot	0.00		0.26		0.03	c0.44
v/s Ratio Perm		c0.00				
v/c Ratio	0.03	0.04	0.34		0.56	0.51
Uniform Delay, d1	84.3	84.3	7.0		88.4	3.5
Progression Factor	1.00	1.00	4.39		1.00	1.00
Incremental Delay, d2	0.1	0.2	0.1		8.3	0.6
Delay (s)	84.4	84.5	30.8		96.8	4.1
Level of Service	F	F	C		F	A
Approach Delay (s)	84.5		30.8			6.9
Approach LOS	F		C			A

Intersection Summary

HCM 2000 Control Delay	19.2	HCM 2000 Level of Service	B
HCM 2000 Volume to Capacity ratio	0.50		
Actuated Cycle Length (s)	190.0	Sum of lost time (s)	24.0
Intersection Capacity Utilization	58.6%	ICU Level of Service	B
Analysis Period (min)	15		

c Critical Lane Group



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	154	211	187	11	1222	501	1019
v/c Ratio	0.64	0.36	0.29	0.13	0.99	0.81	0.68
Control Delay	88.9	3.5	1.0	89.7	93.1	80.9	56.0
Queue Delay	0.0	2.1	2.3	0.0	0.0	0.0	3.6
Total Delay	88.9	5.7	3.3	89.7	93.1	80.9	59.6
Queue Length 50th (ft)	180	7	0	14	-587	312	584
Queue Length 95th (ft)	269	m12	m0	39	#684	383	764
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	239	587	645	188	1233	636	1490
Starvation Cap Reductn	0	250	336	0	0	0	369
Spillback Cap Reductn	0	25	22	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.63	0.61	0.06	0.99	0.79	0.91

Intersection Summary

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Background AM (Impr)

08/09/2023



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕	↗	↖	↑↑↑		↖	↗		
Traffic Volume (vph)	47	71	26	102	62	210	10	945	204	471	936	22	
Future Volume (vph)	47	71	26	102	62	210	10	945	204	471	936	22	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		0.97	0.95		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.97	0.85	1.00	0.97		1.00	1.00		
Flt Protected		0.98			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1784			1677	1504	1770	4950		3433	3527		
Flt Permitted		0.98			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (perm)		1784			1677	1504	1770	4950		3433	3527		
Peak-hour factor, PHF	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	
Adj. Flow (vph)	50	76	28	109	66	223	11	1005	217	501	996	23	
RTOR Reduction (vph)	0	4	0	0	4	122	0	0	0	0	0	0	
Lane Group Flow (vph)	0	150	0	0	207	65	11	1222	0	501	1019	0	
Confl. Peds. (#/hr)	1					1							
Confl. Bikes (#/hr)			1										
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		Prot	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases													
Actuated Green, G (s)		23.1			64.0	64.0	3.3	45.4		32.0	74.1		
Effective Green, g (s)		25.1			66.0	66.0	5.3	47.4		34.0	76.1		
Actuated g/C Ratio		0.13			0.35	0.35	0.03	0.25		0.18	0.40		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		235			582	522	49	1234		614	1412		
v/s Ratio Prot		c0.08			c0.12	0.04	0.01	c0.25		c0.15	0.29		
v/s Ratio Perm													
v/c Ratio		0.64			0.36	0.12	0.22	0.99		0.82	0.72		
Uniform Delay, d1		78.1			46.2	42.3	90.3	71.1		75.0	48.0		
Progression Factor		1.00			0.05	0.01	1.00	1.00		0.94	1.17		
Incremental Delay, d2		5.8			0.7	0.2	2.3	23.4		7.3	2.8		
Delay (s)		83.9			3.0	0.7	92.7	94.5		78.1	58.9		
Level of Service		F			A	A	F	F		E	E		
Approach Delay (s)		83.9			1.9			94.5			65.2		
Approach LOS		F			A			F			E		
Intersection Summary													
HCM 2000 Control Delay			69.4		HCM 2000 Level of Service						E		
HCM 2000 Volume to Capacity ratio			0.71										
Actuated Cycle Length (s)			190.0		Sum of lost time (s)					30.5			
Intersection Capacity Utilization			73.3%		ICU Level of Service					D			
Analysis Period (min)			15										

c Critical Lane Group

1: Chain Bridge Road & Norman Avenue/Oak Place

08/09/2023



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	109	412	375	31	1079	297	1145
v/c Ratio	0.79	0.72	0.52	0.34	0.58	0.89	0.49
Control Delay	130.2	6.1	5.7	109.9	57.4	84.6	41.2
Queue Delay	0.0	56.6	58.9	0.0	0.0	0.0	0.3
Total Delay	130.2	62.7	64.6	109.9	57.4	84.6	41.5
Queue Length 50th (ft)	156	104	93	44	471	327	368
Queue Length 95th (ft)	#288	m0	m0	87	522	#520	397
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	138	582	727	202	1863	342	2331
Starvation Cap Reductn	0	252	422	0	0	0	500
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.79	1.25	1.23	0.15	0.58	0.87	0.63

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Background PM

08/09/2023



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕	↗	↖	↑↑↑		↖	↑↑↑		
Traffic Volume (vph)	31	59	15	217	65	473	30	939	97	285	1040	56	
Future Volume (vph)	31	59	15	217	65	473	30	939	97	285	1040	56	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		1.00	0.91		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.96	0.85	1.00	0.99		1.00	0.99		
Flt Protected		0.99			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1794			1648	1504	1770	5014		1770	5044		
Flt Permitted		0.99			0.97	1.00	0.95	1.00		0.14	1.00		
Satd. Flow (perm)		1794			1648	1504	1770	5014		259	5044		
Peak-hour factor, PHF	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.90	
Adj. Flow (vph)	32	61	16	226	68	493	31	978	101	297	1083	62	
RTOR Reduction (vph)	0	3	0	0	7	204	0	0	0	0	0	0	
Lane Group Flow (vph)	0	106	0	0	405	171	31	1079	0	297	1145	0	
Confl. Peds. (#/hr)			1	1									
Confl. Bikes (#/hr)			1										
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		pm+pt	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases										6			
Actuated Green, G (s)		14.6			73.4	73.4	8.2	79.7		113.3	98.3		
Effective Green, g (s)		16.6			75.4	75.4	10.2	81.7		115.3	100.3		
Actuated g/C Ratio		0.08			0.34	0.34	0.05	0.37		0.52	0.46		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		135			564	515	82	1862		333	2299		
v/s Ratio Prot		c0.06			c0.25	0.11	0.02	0.22		c0.12	0.23		
v/s Ratio Perm										c0.35			
v/c Ratio		0.79			0.72	0.33	0.38	0.58		0.89	0.50		
Uniform Delay, d1		100.0			63.1	53.6	101.8	55.4		45.2	42.1		
Progression Factor		1.00			0.09	0.57	1.00	1.00		1.49	0.96		
Incremental Delay, d2		26.0			0.5	0.1	2.9	1.3		22.5	0.7		
Delay (s)		126.0			6.1	30.4	104.7	56.7		89.7	41.1		
Level of Service		F			A	C	F	E		F	D		
Approach Delay (s)		126.0			17.7			58.1			51.1		
Approach LOS		F			B			E			D		
Intersection Summary													
HCM 2000 Control Delay			48.1		HCM 2000 Level of Service					D			
HCM 2000 Volume to Capacity ratio			0.89										
Actuated Cycle Length (s)			220.0		Sum of lost time (s)					30.5			
Intersection Capacity Utilization			80.1%		ICU Level of Service					D			
Analysis Period (min)			15										

c Critical Lane Group



Lane Group	EBL	EBT	WBL	WBT	WBR	NBT	SBL	SBT	NEL
Lane Group Flow (vph)	40	1485	15	1849	370	18	311	295	18
v/c Ratio	0.33	0.44	0.07	0.80	0.34	0.23	1.25	1.22	0.25
Control Delay	20.4	20.2	13.7	34.9	12.7	107.4	205.3	197.8	108.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	20.4	20.2	13.7	34.9	12.7	107.4	205.3	197.8	108.6
Queue Length 50th (ft)	19	437	7	1174	158	26	~581	~544	26
Queue Length 95th (ft)	42	512	19	1408	257	59	#814	#776	59
Internal Link Dist (ft)		810		1204		100		99	220
Turn Bay Length (ft)	260		140						
Base Capacity (vph)	159	3408	279	2313	1086	80	249	241	130
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.25	0.44	0.05	0.80	0.34	0.23	1.25	1.22	0.14


Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Background PM

08/09/2023




Movement	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations	↔	↑↑↑					↑↑	↔		↔		↔
Traffic Volume (vph)	37	1354	4	8	9	5	1701	340	6	2	8	462
Future Volume (vph)	37	1354	4	8	9	5	1701	340	6	2	8	462
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0					6.0	6.0	6.0	5.0		5.3
Lane Util. Factor	1.00	0.91					1.00	0.95	1.00	1.00		0.95
Frbp, ped/bikes	1.00	1.00					1.00	1.00	1.00	1.00		1.00
Flpb, ped/bikes	1.00	1.00					1.00	1.00	1.00	1.00		1.00
Frt	1.00	1.00					1.00	1.00	0.85	0.93		1.00
Flt Protected	0.95	1.00					0.95	1.00	1.00	0.98		0.95
Satd. Flow (prot)	1770	5075					1770	3539	1583	1704		1681
Flt Permitted	0.04	1.00					0.13	1.00	1.00	0.98		0.95
Satd. Flow (perm)	73	5075					247	3539	1583	1704		1681
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	40	1472	4	9	10	5	1849	370	7	2	9	502
RTOR Reduction (vph)	0	0	0	0	0	0	0	56	0	0	0	0
Lane Group Flow (vph)	40	1485	0	0	0	15	1849	314	0	18	0	311
Confl. Peds. (#/hr)			2	2	2	2						
Confl. Bikes (#/hr)			2	2								
Heavy Vehicles (%)	2%	2%	2%	10%	2%	2%	2%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Split	NA		Split
Protected Phases	5	2			1	1	6		7	7		3
Permitted Phases	2				6	6		6				
Actuated Green, G (s)	143.4	137.1					138.8	134.8	134.8	5.6		30.7
Effective Green, g (s)	147.4	139.1					142.8	136.8	136.8	7.6		32.7
Actuated g/C Ratio	0.67	0.63					0.65	0.62	0.62	0.03		0.15
Clearance Time (s)	8.0	8.0					8.0	8.0	8.0	7.0		7.3
Vehicle Extension (s)	3.0	5.0					3.0	5.0	5.0	3.0		5.0
Lane Grp Cap (vph)	112	3208					201	2200	984	58		249
v/s Ratio Prot	c0.01	0.29					0.00	c0.52		c0.01		c0.18
v/s Ratio Perm	0.22						0.05		0.20			
v/c Ratio	0.36	0.46					0.07	0.84	0.32	0.31		1.25
Uniform Delay, d1	36.8	21.0					15.4	33.0	19.6	103.6		93.7
Progression Factor	1.00	1.00					1.00	1.00	1.00	1.00		0.93
Incremental Delay, d2	2.0	0.5					0.2	4.1	0.9	3.0		140.8
Delay (s)	38.7	21.5					15.5	37.0	20.5	106.7		227.5
Level of Service	D	C					B	D	C	F		F
Approach Delay (s)		22.0						34.1		106.7		
Approach LOS		C						C		F		

Intersection Summary			
HCM 2000 Control Delay	56.5	HCM 2000 Level of Service	E
HCM 2000 Volume to Capacity ratio	0.87		
Actuated Cycle Length (s)	220.0	Sum of lost time (s)	32.9
Intersection Capacity Utilization	86.8%	ICU Level of Service	E
Analysis Period (min)	15		
c Critical Lane Group			

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Background PM
 08/09/2023



Movement	SBT	SBR	SBR2	NEL2	NEL	NER
Lane Configurations	↕				↗	
Traffic Volume (vph)	3	4	89	5	3	9
Future Volume (vph)	3	4	89	5	3	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.3			4.6		
Lane Util. Factor	0.95			1.00		
Frbp, ped/bikes	1.00			1.00		
Flpb, ped/bikes	1.00			1.00		
Frt	0.95			0.93		
Flt Protected	0.97			0.98		
Satd. Flow (prot)	1624			1563		
Flt Permitted	0.97			0.98		
Satd. Flow (perm)	1624			1563		
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	3	4	97	5	3	10
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	295	0	0	0	18	0
Confl. Peds. (#/hr)						
Confl. Bikes (#/hr)						
Heavy Vehicles (%)	2%	10%	2%	10%	10%	10%
Turn Type	NA			Prot	Prot	
Protected Phases	3			4	4	
Permitted Phases						
Actuated Green, G (s)	30.7			5.7		
Effective Green, g (s)	32.7			7.7		
Actuated g/C Ratio	0.15			0.04		
Clearance Time (s)	7.3			6.6		
Vehicle Extension (s)	5.0			3.0		
Lane Grp Cap (vph)	241			54		
v/s Ratio Prot	0.18			c0.01		
v/s Ratio Perm						
v/c Ratio	1.22			0.33		
Uniform Delay, d1	93.7			103.6		
Progression Factor	0.93			1.00		
Incremental Delay, d2	131.9			3.6		
Delay (s)	218.5			107.3		
Level of Service	F			F		
Approach Delay (s)	223.1			107.3		
Approach LOS	F			F		
Intersection Summary						

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place

2026 Background PM
 08/09/2023



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔			↔↔			↑	↗		↔	
Traffic Volume (veh/h)	44	361	25	8	577	3	15	1	6	33	0	187
Future Volume (Veh/h)	44	361	25	8	577	3	15	1	6	33	0	187
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.92	0.92	0.90	0.90	0.92	0.92	0.92	0.90	0.92	0.90
Hourly flow rate (vph)	49	401	27	9	641	3	16	1	7	37	0	208
Pedestrians					2			8			5	
Lane Width (ft)					12.0			12.0			12.0	
Walking Speed (ft/s)					4.0			4.0			4.0	
Percent Blockage					0			1			0	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)		567			1199							
pX, platoon unblocked				0.95			0.95	0.95	0.95	0.95	0.95	
vC, conflicting volume	649			436			1067	1188	224	974	1200	327
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	649			299			964	1091	76	865	1103	327
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	95			99			88	99	99	83	100	69
cM capacity (veh/h)	929			1187			129	189	913	218	185	666
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1					
Volume Total	250	228	330	324	17	7	245					
Volume Left	49	0	9	0	16	0	37					
Volume Right	0	27	0	3	0	7	208					
cSH	929	1700	1187	1700	131	913	509					
Volume to Capacity	0.05	0.13	0.01	0.19	0.13	0.01	0.48					
Queue Length 95th (ft)	4	0	1	0	11	1	65					
Control Delay (s)	2.2	0.0	0.3	0.0	36.5	9.0	18.5					
Lane LOS	A		A		E	A	C					
Approach Delay (s)	1.2		0.1		28.5		18.5					
Approach LOS					D		C					
Intersection Summary												
Average Delay			4.2									
Intersection Capacity Utilization			58.7%	ICU Level of Service	B							
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
4: Eaton Place & Wwest Driveway

2026 Background PM
08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	13	387	537	8	48	58
Future Volume (Veh/h)	13	387	537	8	48	58
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	14	430	597	9	53	64
Pedestrians		1			6	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			1	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		857	909			
pX, platoon unblocked					0.99	
vC, conflicting volume	612				850	310
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	612				826	310
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				82	91
cM capacity (veh/h)	958				301	682
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	157	287	398	208	117	
Volume Left	14	0	0	0	53	
Volume Right	0	0	0	9	64	
cSH	958	1700	1700	1700	433	
Volume to Capacity	0.01	0.17	0.23	0.12	0.27	
Queue Length 95th (ft)	1	0	0	0	27	
Control Delay (s)	0.9	0.0	0.0	0.0	16.4	
Lane LOS	A				C	
Approach Delay (s)	0.3		0.0		16.4	
Approach LOS					C	
Intersection Summary						
Average Delay			1.8			
Intersection Capacity Utilization			33.3%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
5: Eaton Place & Middle Driveway

2026 Background PM
08/09/2023




Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	8	428	523	6	19	22
Future Volume (Veh/h)	8	428	523	6	19	22
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	9	476	581	7	21	24
Pedestrians			1		8	
Lane Width (ft)			12.0		12.0	
Walking Speed (ft/s)			4.0		4.0	
Percent Blockage			0		1	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		1145	621			
pX, platoon unblocked						
vC, conflicting volume	596				850	302
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	596				850	302
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				93	97
cM capacity (veh/h)	970				295	689
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	168	317	387	201	45	
Volume Left	9	0	0	0	21	
Volume Right	0	0	0	7	24	
cSH	970	1700	1700	1700	424	
Volume to Capacity	0.01	0.19	0.23	0.12	0.11	
Queue Length 95th (ft)	1	0	0	0	9	
Control Delay (s)	0.6	0.0	0.0	0.0	14.5	
Lane LOS	A				B	
Approach Delay (s)	0.2		0.0		14.5	
Approach LOS					B	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			27.5%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
6: Eaton Place & East Driveway

2026 Background PM
08/09/2023



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↕↔	
Traffic Volume (veh/h)	11	436	413	23	92	114
Future Volume (Veh/h)	11	436	413	23	92	114
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	12	484	459	26	102	127
Pedestrians		1			3	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)			307			
pX, platoon unblocked						
vC, conflicting volume	488				741	246
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	488				741	246
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				71	83
cM capacity (veh/h)	1069				347	751
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	173	323	306	179	229	
Volume Left	12	0	0	0	102	
Volume Right	0	0	0	26	127	
cSH	1069	1700	1700	1700	494	
Volume to Capacity	0.01	0.19	0.18	0.11	0.46	
Queue Length 95th (ft)	1	0	0	0	60	
Control Delay (s)	0.7	0.0	0.0	0.0	18.4	
Lane LOS	A				C	
Approach Delay (s)	0.2		0.0		18.4	
Approach LOS					C	
Intersection Summary						
Average Delay			3.6			
Intersection Capacity Utilization			38.8%		ICU Level of Service	A
Analysis Period (min)			15			



Lane Group	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	504	906	20	73
v/c Ratio	0.24	1.31	0.34	0.74
Control Delay	3.1	214.7	110.4	137.0
Queue Delay	2.5	0.6	0.0	0.0
Total Delay	5.6	215.3	110.4	137.0
Queue Length 50th (ft)	21	-891	26	101
Queue Length 95th (ft)	22	#969	61	#173
Internal Link Dist (ft)	47	487	120	220
Turn Bay Length (ft)				
Base Capacity (vph)	2142	693	71	109
Starvation Cap Reductn	1481	0	0	0
Spillback Cap Reductn	0	61	0	0
Storage Cap Reductn	0	0	0	0
Reduced v/c Ratio	0.76	1.43	0.28	0.67

















Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis
7: Willow Crescent Dr & Oak Place/Eaton Place

2026 Background PM

08/09/2023

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	93	344	2	2	742	44	4	11	2	35	20	9
Future Volume (vph)	93	344	2	2	742	44	4	11	2	35	20	9
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		6.8			4.5			4.5			5.0	
Lane Util. Factor		0.95			0.95			1.00			1.00	
Frbp, ped/bikes		1.00			1.00			0.99			1.00	
Flpb, ped/bikes		1.00			1.00			1.00			1.00	
Frt		1.00			0.99			0.99			0.98	
Flt Protected		0.99			1.00			0.99			0.97	
Satd. Flow (prot)		3500			3503			1801			1780	
Flt Permitted		0.99			0.95			0.99			0.97	
Satd. Flow (perm)		3500			3343			1801			1780	
Peak-hour factor, PHF	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Adj. Flow (vph)	107	395	2	2	853	51	5	13	2	40	23	10
RTOR Reduction (vph)	0	0	0	0	2	0	0	2	0	0	3	0
Lane Group Flow (vph)	0	504	0	0	904	0	0	18	0	0	70	0
Confl. Peds. (#/hr)	3		2	2		3			7	7		
Turn Type	Split	NA		Perm	NA		Split	NA		Split	NA	
Protected Phases	1 2 3	1 2 3			4		7	7		8	8	
Permitted Phases				4								
Actuated Green, G (s)		134.8			45.5			7.1			11.8	
Effective Green, g (s)		127.9			45.5			7.1			11.8	
Actuated g/C Ratio		0.58			0.21			0.03			0.05	
Clearance Time (s)					4.5			4.5			5.0	
Vehicle Extension (s)					5.5			2.0			2.0	
Lane Grp Cap (vph)		2034			691			58			95	
v/s Ratio Prot		c0.14						c0.01			c0.04	
v/s Ratio Perm					c0.27							
v/c Ratio		0.25			1.31			0.31			0.74	
Uniform Delay, d1		22.5			87.2			104.1			102.6	
Progression Factor		0.15			1.09			1.00			1.00	
Incremental Delay, d2		0.0			149.2			1.1			22.5	
Delay (s)		3.4			244.2			105.2			125.0	
Level of Service		A			F			F			F	
Approach Delay (s)		3.4			244.2			105.2			125.0	
Approach LOS		A			F			F			F	
Intersection Summary												
HCM 2000 Control Delay			155.8			HCM 2000 Level of Service			F			
HCM 2000 Volume to Capacity ratio			0.55									
Actuated Cycle Length (s)			220.0			Sum of lost time (s)		34.5				
Intersection Capacity Utilization			55.7%			ICU Level of Service			B			
Analysis Period (min)			15									
c	Critical Lane Group											

Queues
8: Chain Bridge Road & New Road



Lane Group	WBL	WBR	NBT	SBL	SBT
Lane Group Flow (vph)	5	98	1559	58	1485
v/c Ratio	0.05	0.56	0.39	0.58	0.48
Control Delay	94.6	26.1	3.9	122.7	4.0
Queue Delay	0.0	0.0	0.3	0.0	0.0
Total Delay	94.6	26.1	4.2	122.7	4.0
Queue Length 50th (ft)	7	0	10	84	159
Queue Length 95th (ft)	24	67	546	142	380
Internal Link Dist (ft)	173		608		231
Turn Bay Length (ft)				200	
Base Capacity (vph)	217	280	3980	136	3100
Starvation Cap Reductn	0	0	1469	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.02	0.35	0.62	0.43	0.48
Intersection Summary					

HCM Signalized Intersection Capacity Analysis

8: Chain Bridge Road & New Road

2026 Background PM

08/09/2023



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↵	↵	↑↑↑		↵	↑↑
Traffic Volume (vph)	5	90	1432	2	53	1366
Future Volume (vph)	5	90	1432	2	53	1366
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	8.0	8.0	8.0		8.0	8.0
Lane Util. Factor	1.00	1.00	0.91		1.00	0.95
Frt	1.00	0.85	1.00		1.00	1.00
Flt Protected	0.95	1.00	1.00		0.95	1.00
Satd. Flow (prot)	1770	1583	5084		1770	3539
Flt Permitted	0.95	1.00	1.00		0.95	1.00
Satd. Flow (perm)	1770	1583	5084		1770	3539
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	5	98	1557	2	58	1485
RTOR Reduction (vph)	0	93	0	0	0	0
Lane Group Flow (vph)	5	5	1559	0	58	1485
Turn Type	Prot	Perm	NA		Prot	NA
Protected Phases	8		2		1	6
Permitted Phases		8				
Actuated Green, G (s)	11.3	11.3	172.2		12.5	192.7
Effective Green, g (s)	11.3	11.3	172.2		12.5	192.7
Actuated g/C Ratio	0.05	0.05	0.78		0.06	0.88
Clearance Time (s)	8.0	8.0	8.0		8.0	8.0
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0
Lane Grp Cap (vph)	90	81	3979		100	3099
v/s Ratio Prot	0.00		0.31		0.03	c0.42
v/s Ratio Perm		c0.00				
v/c Ratio	0.06	0.06	0.39		0.58	0.48
Uniform Delay, d1	99.3	99.3	7.5		101.2	2.9
Progression Factor	1.00	1.00	0.44		1.00	1.00
Incremental Delay, d2	0.3	0.3	0.2		7.9	0.5
Delay (s)	99.5	99.6	3.6		109.1	3.5
Level of Service	F	F	A		F	A
Approach Delay (s)	99.6		3.6			7.4
Approach LOS	F		A			A

Intersection Summary

HCM 2000 Control Delay	8.5	HCM 2000 Level of Service	A
HCM 2000 Volume to Capacity ratio	0.47		
Actuated Cycle Length (s)	220.0	Sum of lost time (s)	24.0
Intersection Capacity Utilization	59.4%	ICU Level of Service	B
Analysis Period (min)	15		

c Critical Lane Group

Queues

1: Chain Bridge Road & Norman Avenue/Oak Place



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	109	412	375	31	1079	297	1145
v/c Ratio	0.79	0.72	0.52	0.34	0.56	0.71	0.71
Control Delay	130.2	6.1	5.7	109.9	55.7	104.8	48.1
Queue Delay	0.0	56.6	58.9	0.0	0.0	0.0	0.7
Total Delay	130.2	62.7	64.6	109.9	55.7	104.8	48.8
Queue Length 50th (ft)	156	104	93	44	461	224	721
Queue Length 95th (ft)	#288	m0	m0	87	522	287	570
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	138	582	727	202	1910	471	1622
Starvation Cap Reductn	0	252	422	0	0	0	192
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.79	1.25	1.23	0.15	0.56	0.63	0.80

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Background PM (Impr)

08/09/2023



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕	↗	↖	↑↑↑		↖	↗		
Traffic Volume (vph)	31	59	15	217	65	473	30	939	97	285	1040	56	
Future Volume (vph)	31	59	15	217	65	473	30	939	97	285	1040	56	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		0.97	0.95		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.96	0.85	1.00	0.99		1.00	0.99		
Flt Protected		0.99			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1794			1648	1504	1770	5014		3433	3510		
Flt Permitted		0.99			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (perm)		1794			1648	1504	1770	5014		3433	3510		
Peak-hour factor, PHF	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.90	
Adj. Flow (vph)	32	61	16	226	68	493	31	978	101	297	1083	62	
RTOR Reduction (vph)	0	3	0	0	7	204	0	0	0	0	0	0	
Lane Group Flow (vph)	0	106	0	0	405	171	31	1079	0	297	1145	0	
Confl. Peds. (#/hr)			1	1									
Confl. Bikes (#/hr)			1										
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		Prot	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases													
Actuated Green, G (s)		14.6			73.4	73.4	8.2	81.8		24.7	98.3		
Effective Green, g (s)		16.6			75.4	75.4	10.2	83.8		26.7	100.3		
Actuated g/C Ratio		0.08			0.34	0.34	0.05	0.38		0.12	0.46		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		135			564	515	82	1909		416	1600		
v/s Ratio Prot		c0.06			c0.25	0.11	0.02	0.22		c0.09	c0.33		
v/s Ratio Perm													
v/c Ratio		0.79			0.72	0.33	0.38	0.57		0.71	0.72		
Uniform Delay, d1		100.0			63.1	53.6	101.8	53.7		93.0	48.3		
Progression Factor		1.00			0.09	0.57	1.00	1.00		1.03	0.94		
Incremental Delay, d2		26.0			0.5	0.1	2.9	1.2		5.1	2.5		
Delay (s)		126.0			6.1	30.4	104.7	54.9		101.2	47.8		
Level of Service		F			A	C	F	D		F	D		
Approach Delay (s)		126.0			17.7			56.3			58.8		
Approach LOS		F			B			E			E		
Intersection Summary													
HCM 2000 Control Delay			50.8		HCM 2000 Level of Service						D		
HCM 2000 Volume to Capacity ratio			0.78										
Actuated Cycle Length (s)			220.0		Sum of lost time (s)						30.5		
Intersection Capacity Utilization			78.7%		ICU Level of Service						D		
Analysis Period (min)			15										

c Critical Lane Group

APPENDIX F

Total Future Capacity Analysis Worksheets



1: Chain Bridge Road & Norman Avenue/Oak Place

01/11/2024



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	154	242	216	11	1232	516	1019
v/c Ratio	0.64	0.41	0.32	0.13	1.03	1.41	0.48
Control Delay	88.9	3.5	1.0	89.7	101.4	239.6	47.8
Queue Delay	0.1	2.4	2.7	0.0	0.0	0.0	0.0
Total Delay	89.0	5.9	3.8	89.7	101.4	239.6	47.8
Queue Length 50th (ft)	180	7	0	14	-597	-812	361
Queue Length 95th (ft)	269	m11	m1	39	#694	#1060	465
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	239	588	666	188	1201	366	2140
Starvation Cap Reductn	0	230	338	0	0	0	0
Spillback Cap Reductn	1	105	95	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.65	0.68	0.66	0.06	1.03	1.41	0.48

Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Total Future AM

01/11/2024



Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↕			↕	↗	↖	↑↑↑		↖	↑↑↑		
Traffic Volume (vph)	47	71	26	124	62	244	10	945	213	485	936	22	
Future Volume (vph)	47	71	26	124	62	244	10	945	213	485	936	22	
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		1.00	0.91		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.97	0.85	1.00	0.97		1.00	1.00		
Flt Protected		0.98			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1784			1671	1504	1770	4945		1770	5068		
Flt Permitted		0.98			0.97	1.00	0.95	1.00		0.08	1.00		
Satd. Flow (perm)		1784			1671	1504	1770	4945		146	5068		
Peak-hour factor, PHF	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	
Adj. Flow (vph)	50	76	28	132	66	260	11	1005	227	516	996	23	
RTOR Reduction (vph)	0	4	0	0	4	141	0	0	0	0	0	0	
Lane Group Flow (vph)	0	150	0	0	238	75	11	1232	0	516	1019	0	
Confl. Peds. (#/hr)	1						1						
Confl. Bikes (#/hr)			1										
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		pm+pt	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases										6			
Actuated Green, G (s)		23.1			64.0	64.0	3.3	44.2		84.2	74.1		
Effective Green, g (s)		25.1			66.0	66.0	5.3	46.2		86.2	76.1		
Actuated g/C Ratio		0.13			0.35	0.35	0.03	0.24		0.45	0.40		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		235			580	522	49	1202		367	2029		
v/s Ratio Prot		c0.08			c0.14	0.05	0.01	0.25		c0.26	0.20		
v/s Ratio Perm										c0.38			
v/c Ratio		0.64			0.41	0.14	0.22	1.02		1.41	0.50		
Uniform Delay, d1		78.1			47.2	42.6	90.3	71.9		64.2	42.7		
Progression Factor		1.00			0.04	0.03	1.00	1.00		0.94	1.16		
Incremental Delay, d2		5.8			0.8	0.2	2.3	32.5		196.4	0.8		
Delay (s)		83.9			2.8	1.4	92.7	104.4		256.7	50.2		
Level of Service		F			A	A	F	F		F	D		
Approach Delay (s)		83.9			2.2			104.3			119.6		
Approach LOS		F			A			F			F		
Intersection Summary													
HCM 2000 Control Delay			96.5		HCM 2000 Level of Service						F		
HCM 2000 Volume to Capacity ratio			1.01										
Actuated Cycle Length (s)			190.0		Sum of lost time (s)					30.5			
Intersection Capacity Utilization			88.7%		ICU Level of Service					E			
Analysis Period (min)			15										
c Critical Lane Group													



Lane Group	EBL	EBT	WBL	WBT	WBR	NBT	SBL	SBT	NEL
Lane Group Flow (vph)	105	1869	11	1112	386	4	215	212	6
v/c Ratio	0.32	0.53	0.07	0.50	0.36	0.05	0.71	0.71	0.08
Control Delay	12.8	18.1	13.6	23.2	10.4	88.0	107.6	107.6	88.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	12.8	18.1	13.6	23.2	10.4	88.0	107.6	107.6	88.8
Queue Length 50th (ft)	31	297	3	334	78	5	261	256	7
Queue Length 95th (ft)	91	704	17	656	231	18	m347	m343	26
Internal Link Dist (ft)		810		1204		100		99	220
Turn Bay Length (ft)	260		140						
Base Capacity (vph)	377	3559	175	2243	1067	89	404	400	173
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.28	0.53	0.06	0.50	0.36	0.04	0.53	0.53	0.03


Intersection Summary

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Total Future AM

01/11/2024



Movement	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations	↖	↗↗↗					↖↖	↖		↕		↖
Traffic Volume (vph)	90	1603	2	3	8	2	956	332	2	0	2	342
Future Volume (vph)	90	1603	2	3	8	2	956	332	2	0	2	342
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0					6.0	6.0	6.0	5.0		5.3
Lane Util. Factor	1.00	0.91					1.00	0.95	1.00	1.00		0.95
Frbp, ped/bikes	1.00	1.00					1.00	1.00	0.99	1.00		1.00
Flpb, ped/bikes	1.00	1.00					1.00	1.00	1.00	1.00		1.00
Frt	1.00	1.00					1.00	1.00	0.85	0.93		1.00
Flt Protected	0.95	1.00					0.95	1.00	1.00	0.98		0.95
Satd. Flow (prot)	1770	5082					1770	3539	1560	1695		1681
Flt Permitted	0.17	1.00					0.08	1.00	1.00	0.98		0.95
Satd. Flow (perm)	317	5082					146	3539	1560	1695		1681
Peak-hour factor, PHF	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86	0.86
Adj. Flow (vph)	105	1864	2	3	9	2	1112	386	2	0	2	398
RTOR Reduction (vph)	0	0	0	0	0	0	0	91	0	0	0	0
Lane Group Flow (vph)	105	1869	0	0	0	11	1112	295	0	4	0	215
Confl. Peds. (#/hr)	1		1	1	1	1		1				
Confl. Bikes (#/hr)			1	1								
Heavy Vehicles (%)	2%	2%	2%	10%	2%	2%	2%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Split	NA		Split
Protected Phases	5	2			1	1	6		7	7		3
Permitted Phases	2				6	6		6				
Actuated Green, G (s)	125.7	115.3					110.1	107.5	107.5	1.5		32.1
Effective Green, g (s)	127.9	117.3					114.1	109.5	109.5	3.5		34.1
Actuated g/C Ratio	0.67	0.62					0.60	0.58	0.58	0.02		0.18
Clearance Time (s)	8.0	8.0					8.0	8.0	8.0	7.0		7.3
Vehicle Extension (s)	3.0	5.0					3.0	5.0	5.0	3.0		5.0
Lane Grp Cap (vph)	308	3137					126	2039	899	31		301
v/s Ratio Prot	c0.02	c0.37					0.00	0.31		c0.00		c0.13
v/s Ratio Perm	0.21						0.05		0.19			
v/c Ratio	0.34	0.60					0.09	0.55	0.33	0.13		0.71
Uniform Delay, d1	15.9	22.0					17.9	24.9	21.0	91.8		73.4
Progression Factor	1.00	1.00					1.00	1.00	1.00	1.00		1.31
Incremental Delay, d2	0.7	0.8					0.3	1.1	1.0	1.9		9.1
Delay (s)	16.5	22.8					18.2	25.9	22.0	93.6		105.1
Level of Service	B	C					B	C	C	F		F
Approach Delay (s)		22.5					24.9			93.6		
Approach LOS		C					C			F		

Intersection Summary			
HCM 2000 Control Delay	32.6	HCM 2000 Level of Service	C
HCM 2000 Volume to Capacity ratio	0.62		
Actuated Cycle Length (s)	190.0	Sum of lost time (s)	32.9
Intersection Capacity Utilization	74.6%	ICU Level of Service	D
Analysis Period (min)	15		
c	Critical Lane Group		

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Total Future AM
 01/11/2024




















Movement	SBT	SBR2	NEL2	NEL	NER
Lane Configurations					
Traffic Volume (vph)	2	23	4	0	1
Future Volume (vph)	2	23	4	0	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900
Total Lost time (s)	5.3			4.6	
Lane Util. Factor	0.95			1.00	
Frbp, ped/bikes	1.00			1.00	
Flpb, ped/bikes	1.00			1.00	
Frt	0.98			0.98	
Flt Protected	0.96			0.96	
Satd. Flow (prot)	1664			1621	
Flt Permitted	0.96			0.96	
Satd. Flow (perm)	1664			1621	
Peak-hour factor, PHF	0.86	0.86	0.86	0.86	0.86
Adj. Flow (vph)	2	27	5	0	1
RTOR Reduction (vph)	0	0	0	0	0
Lane Group Flow (vph)	212	0	0	6	0
Confl. Peds. (#/hr)					
Confl. Bikes (#/hr)					
Heavy Vehicles (%)	2%	2%	10%	10%	10%
Turn Type	NA		Prot	Prot	
Protected Phases	3		4	4	
Permitted Phases					
Actuated Green, G (s)	32.1			1.6	
Effective Green, g (s)	34.1			3.6	
Actuated g/C Ratio	0.18			0.02	
Clearance Time (s)	7.3			6.6	
Vehicle Extension (s)	5.0			3.0	
Lane Grp Cap (vph)	298			30	
v/s Ratio Prot	0.13			c0.00	
v/s Ratio Perm					
v/c Ratio	0.71			0.20	
Uniform Delay, d1	73.3			91.8	
Progression Factor	1.31			1.00	
Incremental Delay, d2	9.1			3.3	
Delay (s)	105.1			95.1	
Level of Service	F			F	
Approach Delay (s)	105.1			95.1	
Approach LOS	F			F	
Intersection Summary					

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place

2026 Total Future AM

01/11/2024

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	288	528	13	3	278	13	6	4	3	9	0	58
Future Volume (Veh/h)	288	528	13	3	278	13	6	4	3	9	0	58
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.85	0.85	0.92	0.92	0.85	0.85	0.92	0.92	0.92	0.85	0.92	0.85
Hourly flow rate (vph)	339	621	14	3	327	15	7	4	3	11	0	68
Pedestrians					1			2				
Lane Width (ft)					12.0			12.0				
Walking Speed (ft/s)					4.0			4.0				
Percent Blockage					0			0				
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)		567			1199							
pX, platoon unblocked				0.85			0.85	0.85	0.85	0.85	0.85	
vC, conflicting volume	342			637			1546	1656	320	1335	1656	171
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	342			236			1299	1428	0	1052	1427	171
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	72			100			90	95	100	91	100	92
cM capacity (veh/h)	1214			1134			73	82	925	116	82	843
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1					
Volume Total	650	324	166	178	11	3	79					
Volume Left	339	0	3	0	7	0	11					
Volume Right	0	14	0	15	0	3	68					
cSH	1214	1700	1134	1700	76	925	450					
Volume to Capacity	0.28	0.19	0.00	0.10	0.14	0.00	0.18					
Queue Length 95th (ft)	29	0	0	0	12	0	16					
Control Delay (s)	6.2	0.0	0.2	0.0	60.2	8.9	14.7					
Lane LOS	A		A		F	A	B					
Approach Delay (s)	4.2		0.1		49.2		14.7					
Approach LOS					E		B					
Intersection Summary												
Average Delay			4.2									
Intersection Capacity Utilization			52.3%	ICU Level of Service	A							
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis
4: Eaton Place & Wwest Driveway

2026 Total Future AM
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	54	486	261	61	28	34
Future Volume (Veh/h)	54	486	261	61	28	34
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	64	572	307	72	33	40
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		857	909			
pX, platoon unblocked					0.93	
vC, conflicting volume	380				758	190
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	380				583	190
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	95				92	95
cM capacity (veh/h)	1174				388	818
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	255	381	205	174	73	
Volume Left	64	0	0	0	33	
Volume Right	0	0	0	72	40	
cSH	1174	1700	1700	1700	545	
Volume to Capacity	0.05	0.22	0.12	0.10	0.13	
Queue Length 95th (ft)	4	0	0	0	12	
Control Delay (s)	2.5	0.0	0.0	0.0	12.6	
Lane LOS	A				B	
Approach Delay (s)	1.0		0.0		12.6	
Approach LOS					B	
Intersection Summary						
Average Delay			1.4			
Intersection Capacity Utilization			38.0%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
 5: Eaton Place & Middle Driveway

2026 Total Future AM
 01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	43	471	317	24	8	5
Future Volume (Veh/h)	43	471	317	24	8	5
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	51	554	373	28	9	6
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		1145	621			
pX, platoon unblocked						
vC, conflicting volume	402				767	202
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	402				767	202
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	96				97	99
cM capacity (veh/h)	1152				323	805
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	236	369	249	152	15	
Volume Left	51	0	0	0	9	
Volume Right	0	0	0	28	6	
cSH	1152	1700	1700	1700	425	
Volume to Capacity	0.04	0.22	0.15	0.09	0.04	
Queue Length 95th (ft)	3	0	0	0	3	
Control Delay (s)	2.1	0.0	0.0	0.0	13.8	
Lane LOS	A				B	
Approach Delay (s)	0.8		0.0		13.8	
Approach LOS					B	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			37.3%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
6: Eaton Place & East Driveway


2026 Total Future AM
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	70	407	324	126	13	17
Future Volume (Veh/h)	70	407	324	126	13	17
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	82	479	381	148	15	20
Pedestrians		1			2	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)			307			
pX, platoon unblocked						
vC, conflicting volume	531				860	268
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	531				860	268
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	92				94	97
cM capacity (veh/h)	1031				271	729
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	242	319	254	275	35	
Volume Left	82	0	0	0	15	
Volume Right	0	0	0	148	20	
cSH	1031	1700	1700	1700	423	
Volume to Capacity	0.08	0.19	0.15	0.16	0.08	
Queue Length 95th (ft)	6	0	0	0	7	
Control Delay (s)	3.5	0.0	0.0	0.0	14.3	
Lane LOS	A				B	
Approach Delay (s)	1.5		0.0		14.3	
Approach LOS					B	
Intersection Summary						
Average Delay			1.2			
Intersection Capacity Utilization			40.0%		ICU Level of Service	A
Analysis Period (min)			15			

Queues
7: Willow Cresent Dr & Oak Place/Eaton Place

2026 Total Future AM
01/11/2024



















Lane Group	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	883	418	13	159
v/c Ratio	0.42	0.70	0.23	0.88
Control Delay	3.3	83.4	62.5	104.1
Queue Delay	51.7	0.0	0.0	0.0
Total Delay	55.1	83.4	62.5	104.1
Queue Length 50th (ft)	37	234	6	159
Queue Length 95th (ft)	m31	322	32	#331
Internal Link Dist (ft)	47	487	120	220
Turn Bay Length (ft)				
Base Capacity (vph)	2124	638	98	181
Starvation Cap Reductn	1379	0	0	0
Spillback Cap Reductn	0	0	0	0
Storage Cap Reductn	0	0	0	0
Reduced v/c Ratio	1.19	0.66	0.13	0.88

Intersection Summary

- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
7: Willow Cresent Dr & Oak Place/Eaton Place

2026 Total Future AM
01/11/2024

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	3	763	3	0	338	25	2	3	7	43	8	88
Future Volume (vph)	3	763	3	0	338	25	2	3	7	43	8	88
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		6.8			4.5			4.5			5.0	
Lane Util. Factor		0.95			0.95			1.00			1.00	
Frbp, ped/bikes		1.00			1.00			0.96			0.99	
Flpb, ped/bikes		1.00			1.00			1.00			1.00	
Frt		1.00			0.99			0.92			0.91	
Flt Protected		1.00			1.00			0.99			0.98	
Satd. Flow (prot)		3537			3496			1621			1657	
Flt Permitted		1.00			1.00			0.99			0.98	
Satd. Flow (perm)		3537			3496			1621			1657	
Peak-hour factor, PHF	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Adj. Flow (vph)	3	877	3	0	389	29	2	3	8	49	9	101
RTOR Reduction (vph)	0	0	0	0	3	0	0	8	0	0	32	0
Lane Group Flow (vph)	0	883	0	0	415	0	0	5	0	0	127	0
Confl. Peds. (#/hr)	2		5	5		2			6	6		
Confl. Bikes (#/hr)			1									3
Turn Type	Split	NA			NA		Split	NA		Split	NA	
Protected Phases	1 2 3	1 2 3			4		7	7		8	8	
Permitted Phases				4								
Actuated Green, G (s)		114.2			32.1			5.7			17.2	
Effective Green, g (s)		107.3			32.1			5.7			17.2	
Actuated g/C Ratio		0.56			0.17			0.03			0.09	
Clearance Time (s)					4.5			4.5			5.0	
Vehicle Extension (s)					5.5			2.0			2.0	
Lane Grp Cap (vph)		1997			590			48			150	
v/s Ratio Prot		c0.25			c0.12			c0.00			c0.08	
v/s Ratio Perm												
v/c Ratio		0.44			0.70			0.11			0.85	
Uniform Delay, d1		24.0			74.5			89.7			85.1	
Progression Factor		0.16			1.04			1.00			1.00	
Incremental Delay, d2		0.0			5.1			0.4			32.3	
Delay (s)		3.9			82.6			90.0			117.4	
Level of Service		A			F			F			F	
Approach Delay (s)		3.9			82.6			90.0			117.4	
Approach LOS		A			F			F			F	
Intersection Summary												
HCM 2000 Control Delay			39.2									D
HCM 2000 Volume to Capacity ratio			0.55									
Actuated Cycle Length (s)			190.0						34.5			
Intersection Capacity Utilization			47.5%									A
Analysis Period (min)			15									
c Critical Lane Group												

8: Chain Bridge Road & New Road

01/11/2024



Lane Group	WBL	WBR	NBT	SBL	SBT
Lane Group Flow (vph)	3	68	1344	48	1565
v/c Ratio	0.03	0.44	0.34	0.49	0.52
Control Delay	78.7	23.3	33.7	102.6	4.8
Queue Delay	0.0	0.0	0.8	0.0	0.0
Total Delay	78.7	23.3	34.5	102.6	4.8
Queue Length 50th (ft)	4	0	575	59	174
Queue Length 95th (ft)	15	52	m584	109	424
Internal Link Dist (ft)	173		608		231
Turn Bay Length (ft)				200	
Base Capacity (vph)	251	283	3939	158	3033
Starvation Cap Reductn	0	0	2125	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.01	0.24	0.74	0.30	0.52

Intersection Summary

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
8: Chain Bridge Road & New Road

2026 Total Future AM

01/11/2024



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↶	↷	↕↕↕		↶	↷↷
Traffic Volume (vph)	3	63	1234	3	44	1440
Future Volume (vph)	3	63	1234	3	44	1440
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	8.0	8.0	8.0		8.0	8.0
Lane Util. Factor	1.00	1.00	0.91		1.00	0.95
Frt	1.00	0.85	1.00		1.00	1.00
Flt Protected	0.95	1.00	1.00		0.95	1.00
Satd. Flow (prot)	1770	1583	5084		1770	3539
Flt Permitted	0.95	1.00	1.00		0.95	1.00
Satd. Flow (perm)	1770	1583	5084		1770	3539
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	3	68	1341	3	48	1565
RTOR Reduction (vph)	0	64	0	0	0	0
Lane Group Flow (vph)	3	4	1344	0	48	1565
Turn Type	Prot	Perm	NA		Prot	NA
Protected Phases	8		2		1	6
Permitted Phases		8				
Actuated Green, G (s)	11.2	11.2	145.6		9.2	162.8
Effective Green, g (s)	11.2	11.2	145.6		9.2	162.8
Actuated g/C Ratio	0.06	0.06	0.77		0.05	0.86
Clearance Time (s)	8.0	8.0	8.0		8.0	8.0
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0
Lane Grp Cap (vph)	104	93	3895		85	3032
v/s Ratio Prot	0.00		0.26		0.03	c0.44
v/s Ratio Perm		c0.00				
v/c Ratio	0.03	0.04	0.35		0.56	0.52
Uniform Delay, d1	84.3	84.3	7.1		88.4	3.5
Progression Factor	1.00	1.00	4.29		1.00	1.00
Incremental Delay, d2	0.1	0.2	0.1		8.3	0.6
Delay (s)	84.4	84.5	30.4		96.8	4.1
Level of Service	F	F	C		F	A
Approach Delay (s)	84.5		30.4			6.9
Approach LOS	F		C			A

Intersection Summary				
HCM 2000 Control Delay		19.1	HCM 2000 Level of Service	B
HCM 2000 Volume to Capacity ratio		0.51		
Actuated Cycle Length (s)		190.0	Sum of lost time (s)	24.0
Intersection Capacity Utilization		59.0%	ICU Level of Service	B
Analysis Period (min)		15		

c Critical Lane Group

Queues

1: Chain Bridge Road & Norman Avenue/Oak Place



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	154	242	216	11	1232	516	1019
v/c Ratio	0.64	0.41	0.32	0.13	1.01	0.83	0.68
Control Delay	88.7	3.5	1.0	89.7	97.4	81.5	55.9
Queue Delay	0.1	2.4	2.7	0.0	0.0	0.0	3.6
Total Delay	88.8	5.9	3.7	89.7	97.4	81.5	59.6
Queue Length 50th (ft)	180	7	0	14	-597	323	583
Queue Length 95th (ft)	269	m11	m1	39	#694	395	764
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	240	588	666	188	1220	636	1490
Starvation Cap Reductn	0	229	337	0	0	0	370
Spillback Cap Reductn	1	105	95	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.67	0.66	0.06	1.01	0.81	0.91






















Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Total Future AM (Impr)





















01/11/2024

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	47	71	26	124	62	244	10	945	213	485	936	22
Future Volume (vph)	47	71	26	124	62	244	10	945	213	485	936	22
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8	
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		0.97	0.95	
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00	
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00	
Frt		0.98			0.97	0.85	1.00	0.97		1.00	1.00	
Flt Protected		0.98			0.97	1.00	0.95	1.00		0.95	1.00	
Satd. Flow (prot)		1788			1671	1504	1770	4945		3433	3527	
Flt Permitted		0.98			0.97	1.00	0.95	1.00		0.95	1.00	
Satd. Flow (perm)		1788			1671	1504	1770	4945		3433	3527	
Peak-hour factor, PHF	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94	0.94
Adj. Flow (vph)	50	76	28	132	66	260	11	1005	227	516	996	23
RTOR Reduction (vph)	0	4	0	0	4	141	0	0	0	0	0	0
Lane Group Flow (vph)	0	150	0	0	238	75	11	1232	0	516	1019	0
Confl. Peds. (#/hr)	1					1						
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		Prot	NA	
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6	
Permitted Phases												
Actuated Green, G (s)		23.1			64.0	64.0	3.3	44.9		32.5	74.1	
Effective Green, g (s)		25.1			66.0	66.0	5.3	46.9		34.5	76.1	
Actuated g/C Ratio		0.13			0.35	0.35	0.03	0.25		0.18	0.40	
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8	
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0	
Lane Grp Cap (vph)		236			580	522	49	1220		623	1412	
v/s Ratio Prot		c0.08			c0.14	0.05	0.01	c0.25		c0.15	0.29	
v/s Ratio Perm												
v/c Ratio		0.63			0.41	0.14	0.22	1.01		0.83	0.72	
Uniform Delay, d1		78.1			47.2	42.6	90.3	71.5		74.9	48.0	
Progression Factor		1.00			0.04	0.03	1.00	1.00		0.94	1.17	
Incremental Delay, d2		5.7			0.8	0.2	2.3	28.2		7.8	2.8	
Delay (s)		83.8			2.9	1.4	92.7	99.8		78.5	58.8	
Level of Service		F			A	A	F	F		E	E	
Approach Delay (s)		83.8			2.2			99.7			65.5	
Approach LOS		F			A			F			E	
Intersection Summary												
HCM 2000 Control Delay			70.3									E
HCM 2000 Volume to Capacity ratio			0.75									
Actuated Cycle Length (s)			190.0							30.5		
Intersection Capacity Utilization			75.7%									D
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place

2026 Total Future AM (Impr)

01/11/2024

													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations													
Traffic Volume (veh/h)	288	528	13	3	278	13	6	4	3	9	0	58	
Future Volume (Veh/h)	288	528	13	3	278	13	6	4	3	9	0	58	
Sign Control	Free			Free			Stop			Stop			
Grade	0%			0%			0%			0%			
Peak Hour Factor	0.85	0.85	0.92	0.92	0.85	0.85	0.92	0.92	0.92	0.85	0.92	0.85	
Hourly flow rate (vph)	339	621	14	3	327	15	7	4	3	11	0	68	
Pedestrians					1					2			
Lane Width (ft)					12.0					12.0			
Walking Speed (ft/s)					4.0					4.0			
Percent Blockage					0					0			
Right turn flare (veh)													
Median type	None				TWLTL								
Median storage (veh)					2								
Upstream signal (ft)	567				1199								
pX, platoon unblocked				0.83				0.83	0.83	0.83	0.83	0.83	
vC, conflicting volume	342			637			1709	1656	631	1646	1656	334	
vC1, stage 1 conf vol							1308	1308			340	340	
vC2, stage 2 conf vol							401	348			1305	1315	
vCu, unblocked vol	342			465			1751	1687	458	1674	1686	334	
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2	
tC, 2 stage (s)							6.1	5.5			6.1	5.5	
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3	
p0 queue free %	72			100			94	97	99	90	100	90	
cM capacity (veh/h)	1217			913			111	133	501	114	135	707	
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1						
Volume Total	339	635	3	342	11	3	79						
Volume Left	339	0	3	0	7	0	11						
Volume Right	0	14	0	15	0	3	68						
cSH	1217	1700	913	1700	118	501	410						
Volume to Capacity	0.28	0.37	0.00	0.20	0.09	0.01	0.19						
Queue Length 95th (ft)	29	0	0	0	8	0	18						
Control Delay (s)	9.1	0.0	9.0	0.0	38.7	12.2	15.9						
Lane LOS	A			A			E	B	C				
Approach Delay (s)	3.2			0.1			33.0	15.9					
Approach LOS							D	C					
Intersection Summary													
Average Delay			3.4										
Intersection Capacity Utilization			52.7%		ICU Level of Service				A				
Analysis Period (min)	15												

HCM Unsignalized Intersection Capacity Analysis
4: Eaton Place & Wwest Driveway

2026 Total Future AM (Impr)
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	54	486	261	61	28	34
Future Volume (Veh/h)	54	486	261	61	28	34
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	64	572	307	72	33	40
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		TWLTL	TWLTL			
Median storage (veh)		2	2			
Upstream signal (ft)		857	909			
pX, platoon unblocked					0.84	
vC, conflicting volume	380				1044	344
vC1, stage 1 conf vol					344	
vC2, stage 2 conf vol					700	
vCu, unblocked vol	380				957	344
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)					5.4	
tF (s)	2.2				3.5	3.3
p0 queue free %	95				92	94
cM capacity (veh/h)	1177				419	698
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	64	572	379	73		
Volume Left	64	0	0	33		
Volume Right	0	0	72	40		
cSH	1177	1700	1700	537		
Volume to Capacity	0.05	0.34	0.22	0.14		
Queue Length 95th (ft)	4	0	0	12		
Control Delay (s)	8.2	0.0	0.0	12.8		
Lane LOS	A			B		
Approach Delay (s)	0.8		0.0	12.8		
Approach LOS				B		
Intersection Summary						
Average Delay			1.3			
Intersection Capacity Utilization			35.9%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
5: Eaton Place & Middle Driveway

2026 Total Future AM (Impr)
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	43	471	317	24	8	5
Future Volume (Veh/h)	43	471	317	24	8	5
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	51	554	373	28	9	6
Pedestrians					1	
Lane Width (ft)					12.0	
Walking Speed (ft/s)					4.0	
Percent Blockage					0	
Right turn flare (veh)						
Median type		TWLTL	TWLTL			
Median storage (veh)		2	2			
Upstream signal (ft)		1145	621			
pX, platoon unblocked					0.85	
vC, conflicting volume	402				1044	388
vC1, stage 1 conf vol					388	
vC2, stage 2 conf vol					656	
vCu, unblocked vol	402				964	388
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)					5.4	
tF (s)	2.2				3.5	3.3
p0 queue free %	96				98	99
cM capacity (veh/h)	1156				436	660
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	51	554	401	15		
Volume Left	51	0	0	9		
Volume Right	0	0	28	6		
cSH	1156	1700	1700	504		
Volume to Capacity	0.04	0.33	0.24	0.03		
Queue Length 95th (ft)	3	0	0	2		
Control Delay (s)	8.3	0.0	0.0	12.4		
Lane LOS	A			B		
Approach Delay (s)	0.7		0.0	12.4		
Approach LOS				B		
Intersection Summary						
Average Delay			0.6			
Intersection Capacity Utilization			34.8%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
 6: Eaton Place & East Driveway

2026 Total Future AM (Impr)
 01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↖	↗	↖		↘	↘
Traffic Volume (veh/h)	70	407	324	126	13	17
Future Volume (Veh/h)	70	407	324	126	13	17
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.85	0.85	0.85	0.85	0.85	0.85
Hourly flow rate (vph)	82	479	381	148	15	20
Pedestrians		1			2	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		TWLTL	None			
Median storage (veh)		2				
Upstream signal (ft)			307			
pX, platoon unblocked	0.98				0.98	0.98
vC, conflicting volume	531				1100	458
vC1, stage 1 conf vol					457	
vC2, stage 2 conf vol					643	
vCu, unblocked vol	514				1093	440
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)					5.4	
tF (s)	2.2				3.5	3.3
p0 queue free %	92				96	97
cM capacity (veh/h)	1032				419	605
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	82	479	529	35		
Volume Left	82	0	0	15		
Volume Right	0	0	148	20		
cSH	1032	1700	1700	508		
Volume to Capacity	0.08	0.28	0.31	0.07		
Queue Length 95th (ft)	6	0	0	6		
Control Delay (s)	8.8	0.0	0.0	12.6		
Lane LOS	A			B		
Approach Delay (s)	1.3		0.0	12.6		
Approach LOS				B		
Intersection Summary						
Average Delay			1.0			
Intersection Capacity Utilization			42.3%		ICU Level of Service	A
Analysis Period (min)			15			

Queues

2026 Total Future PM

1: Chain Bridge Road & Norman Avenue/Oak Place

01/11/2024



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	109	430	399	31	1125	331	1172
v/c Ratio	0.78	0.75	0.55	0.34	0.63	0.99	0.50
Control Delay	127.9	7.2	7.3	109.9	60.0	109.4	41.6
Queue Delay	0.0	56.3	58.6	0.0	0.0	0.0	0.3
Total Delay	127.9	63.5	65.9	109.9	60.0	109.4	41.9
Queue Length 50th (ft)	156	130	130	44	497	~398	377
Queue Length 95th (ft)	#288	m0	m0	87	549	#609	405
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	140	583	726	202	1799	335	2324
Starvation Cap Reductn	0	254	416	0	0	0	496
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.78	1.31	1.29	0.15	0.63	0.99	0.64






















Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Total Future PM

01/11/2024

													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations													
Traffic Volume (vph)	31	59	15	233	65	497	30	961	119	318	1066	56	
Future Volume (vph)	31	59	15	233	65	497	30	961	119	318	1066	56	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		1.00	0.91		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.96	0.85	1.00	0.98		1.00	0.99		
Flt Protected		0.99			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1794			1650	1504	1770	5001		1770	5045		
Flt Permitted		0.99			0.97	1.00	0.95	1.00		0.12	1.00		
Satd. Flow (perm)		1794			1650	1504	1770	5001		225	5045		
Peak-hour factor, PHF	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.90	
Adj. Flow (vph)	32	61	16	243	68	518	31	1001	124	331	1110	62	
RTOR Reduction (vph)	0	3	0	0	7	203	0	0	0	0	0	0	
Lane Group Flow (vph)	0	106	0	0	423	196	31	1125	0	331	1172	0	
Confl. Peds. (#/hr)			1	1									
Confl. Bikes (#/hr)			1										
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		pm+pt	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases										6			
Actuated Green, G (s)		14.9			73.4	73.4	8.2	77.2		113.0	98.0		
Effective Green, g (s)		16.9			75.4	75.4	10.2	79.2		115.0	100.0		
Actuated g/C Ratio		0.08			0.34	0.34	0.05	0.36		0.52	0.45		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		137			565	515	82	1800		335	2293		
v/s Ratio Prot		c0.06			c0.26	0.13	0.02	0.22		c0.14	0.23		
v/s Ratio Perm										c0.38			
v/c Ratio		0.78			0.75	0.38	0.38	0.62		0.99	0.51		
Uniform Delay, d1		99.7			63.9	54.6	101.8	58.1		57.5	42.6		
Progression Factor		1.00			0.10	0.58	1.00	1.00		1.40	0.96		
Incremental Delay, d2		24.1			0.7	0.1	2.9	1.7		42.4	0.7		
Delay (s)		123.8			7.2	31.6	104.7	59.8		123.0	41.5		
Level of Service		F			A	C	F	E		F	D		
Approach Delay (s)		123.8			19.0			61.0			59.5		
Approach LOS		F			B			E			E		
Intersection Summary													
HCM 2000 Control Delay			52.6		HCM 2000 Level of Service						D		
HCM 2000 Volume to Capacity ratio			0.96										
Actuated Cycle Length (s)			220.0		Sum of lost time (s)						30.5		
Intersection Capacity Utilization			83.3%		ICU Level of Service						E		
Analysis Period (min)			15										

c Critical Lane Group



Lane Group	EBL	EBT	WBL	WBT	WBR	NBT	SBL	SBT	NEL
Lane Group Flow (vph)	43	1461	15	1821	397	18	318	311	18
v/c Ratio	0.33	0.43	0.06	0.79	0.36	0.23	1.28	1.29	0.25
Control Delay	19.3	20.0	13.7	34.5	12.9	107.4	216.0	221.3	108.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay	19.3	20.0	13.7	34.5	12.9	107.4	216.0	221.3	108.6
Queue Length 50th (ft)	21	427	7	1140	172	26	-604	-595	26
Queue Length 95th (ft)	42	501	19	1373	279	59	#834	#826	59
Internal Link Dist (ft)		810		1204		100		99	220
Turn Bay Length (ft)	260		140						
Base Capacity (vph)	164	3408	283	2310	1089	80	249	241	130
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.26	0.43	0.05	0.79	0.36	0.23	1.28	1.29	0.14

Intersection Summary

~ Volume exceeds capacity, queue is theoretically infinite.

Queue shown is maximum after two cycles.


95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Total Future PM

01/11/2024




Movement	EBL	EBT	EBR	EBR2	WBL2	WBL	WBT	WBR	NBL	NBT	NBR	SBL
Lane Configurations	↙	↑↑↑				↘	↑↑	↗		↕		↙
Traffic Volume (vph)	40	1332	4	8	9	5	1675	365	6	2	8	480
Future Volume (vph)	40	1332	4	8	9	5	1675	365	6	2	8	480
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	6.0	6.0					6.0	6.0	6.0		5.0	5.3
Lane Util. Factor	1.00	0.91					1.00	0.95	1.00		1.00	0.95
Frbp, ped/bikes	1.00	1.00					1.00	1.00	1.00		1.00	1.00
Flpb, ped/bikes	1.00	1.00					1.00	1.00	1.00		1.00	1.00
Frt	1.00	1.00					1.00	1.00	0.85		0.93	1.00
Flt Protected	0.95	1.00					0.95	1.00	1.00		0.98	0.95
Satd. Flow (prot)	1770	5075					1770	3539	1583		1704	1681
Flt Permitted	0.04	1.00					0.14	1.00	1.00		0.98	0.95
Satd. Flow (perm)	80	5075					256	3539	1583		1704	1681
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	43	1448	4	9	10	5	1821	397	7	2	9	522
RTOR Reduction (vph)	0	0	0	0	0	0	0	61	0	0	0	0
Lane Group Flow (vph)	43	1461	0	0	0	15	1821	336	0	18	0	318
Confl. Peds. (#/hr)			2	2	2	2						
Confl. Bikes (#/hr)			2	2								
Heavy Vehicles (%)	2%	2%	2%	10%	2%	2%	2%	2%	2%	2%	2%	2%
Turn Type	pm+pt	NA			pm+pt	pm+pt	NA	Perm	Split	NA		Split
Protected Phases	5	2			1	1	6		7	7		3
Permitted Phases	2				6	6		6				
Actuated Green, G (s)	143.6	137.1					138.6	134.6	134.6		5.6	30.7
Effective Green, g (s)	147.6	139.1					142.6	136.6	136.6		7.6	32.7
Actuated g/C Ratio	0.67	0.63					0.65	0.62	0.62		0.03	0.15
Clearance Time (s)	8.0	8.0					8.0	8.0	8.0		7.0	7.3
Vehicle Extension (s)	3.0	5.0					3.0	5.0	5.0		3.0	5.0
Lane Grp Cap (vph)	118	3208					207	2197	982		58	249
v/s Ratio Prot	c0.01	0.29					0.00	c0.51			c0.01	0.19
v/s Ratio Perm	0.23						0.05		0.21			
v/c Ratio	0.36	0.46					0.07	0.83	0.34		0.31	1.28
Uniform Delay, d1	35.5	20.9					15.3	32.6	20.1		103.6	93.7
Progression Factor	1.00	1.00					1.00	1.00	1.00		1.00	0.95
Incremental Delay, d2	1.9	0.5					0.1	3.8	0.9		3.0	151.9
Delay (s)	37.5	21.4					15.5	36.4	21.0		106.7	240.8
Level of Service	D	C					B	D	C		F	F
Approach Delay (s)		21.8						33.5			106.7	
Approach LOS		C						C			F	

Intersection Summary		
HCM 2000 Control Delay	60.2	HCM 2000 Level of Service
HCM 2000 Volume to Capacity ratio	0.87	E
Actuated Cycle Length (s)	220.0	Sum of lost time (s)
Intersection Capacity Utilization	86.7%	32.9
Analysis Period (min)	15	ICU Level of Service
		E
c Critical Lane Group		

HCM Signalized Intersection Capacity Analysis
 2: Oak Place & Autobody Lot/Eaton Place & Fairfax Blvd

2026 Total Future PM
 01/11/2024



Movement	SBT	SBR	SBR2	NEL2	NEL	NER
Lane Configurations	↕				↗	
Traffic Volume (vph)	3	4	92	5	3	9
Future Volume (vph)	3	4	92	5	3	9
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.3			4.6		
Lane Util. Factor	0.95			1.00		
Frbp, ped/bikes	1.00			1.00		
Flpb, ped/bikes	1.00			1.00		
Frt	0.95			0.93		
Flt Protected	0.97			0.98		
Satd. Flow (prot)	1626			1563		
Flt Permitted	0.97			0.98		
Satd. Flow (perm)	1626			1563		
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	3	4	100	5	3	10
RTOR Reduction (vph)	0	0	0	0	0	0
Lane Group Flow (vph)	311	0	0	0	18	0
Confl. Peds. (#/hr)						
Confl. Bikes (#/hr)						
Heavy Vehicles (%)	2%	10%	2%	10%	10%	10%
Turn Type	NA			Prot	Prot	
Protected Phases	3			4	4	
Permitted Phases						
Actuated Green, G (s)	30.7			5.7		
Effective Green, g (s)	32.7			7.7		
Actuated g/C Ratio	0.15			0.04		
Clearance Time (s)	7.3			6.6		
Vehicle Extension (s)	5.0			3.0		
Lane Grp Cap (vph)	241			54		
v/s Ratio Prot	c0.19			c0.01		
v/s Ratio Perm						
v/c Ratio	1.29			0.33		
Uniform Delay, d1	93.7			103.6		
Progression Factor	0.95			1.00		
Incremental Delay, d2	158.0			3.6		
Delay (s)	246.9			107.3		
Level of Service	F			F		
Approach Delay (s)	243.8			107.3		
Approach LOS	F			F		
Intersection Summary						

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place

2026 Total Future PM
 01/11/2024




Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔↔			↔↔			↑	↗		↔	
Traffic Volume (veh/h)	73	387	25	8	596	8	15	1	6	36	0	208
Future Volume (Veh/h)	73	387	25	8	596	8	15	1	6	36	0	208
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.92	0.92	0.90	0.90	0.92	0.92	0.92	0.90	0.92	0.90
Hourly flow rate (vph)	81	430	27	9	662	9	16	1	7	40	0	231
Pedestrians					2			8			5	
Lane Width (ft)					12.0			12.0			12.0	
Walking Speed (ft/s)					4.0			4.0			4.0	
Percent Blockage					0			1			0	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (ft)		567			1199							
pX, platoon unblocked				0.94			0.94	0.94	0.94	0.94	0.94	
vC, conflicting volume	676			465			1194	1308	238	1076	1316	340
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	676			292			1070	1192	50	945	1202	340
tC, single (s)	4.1			4.1			7.5	6.5	6.9	7.5	6.5	6.9
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	91			99			83	99	99	78	100	65
cM capacity (veh/h)	908			1178			97	155	935	183	153	653
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1					
Volume Total	296	242	340	340	17	7	271					
Volume Left	81	0	9	0	16	0	40					
Volume Right	0	27	0	9	0	7	231					
cSH	908	1700	1178	1700	99	935	473					
Volume to Capacity	0.09	0.14	0.01	0.20	0.17	0.01	0.57					
Queue Length 95th (ft)	7	0	1	0	15	1	88					
Control Delay (s)	3.3	0.0	0.3	0.0	48.8	8.9	22.3					
Lane LOS	A		A		E	A	C					
Approach Delay (s)	1.8		0.1		37.1		22.3					
Approach LOS					E		C					
Intersection Summary												
Average Delay			5.3									
Intersection Capacity Utilization			62.1%		ICU Level of Service				B			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis

4: Eaton Place & Wwest Driveway

2026 Total Future PM
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↕↔	
Traffic Volume (veh/h)	38	391	542	29	64	76
Future Volume (Veh/h)	38	391	542	29	64	76
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	42	434	602	32	71	84
Pedestrians		1			6	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			1	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		857	909			
pX, platoon unblocked					0.98	
vC, conflicting volume	640				925	324
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	640				888	324
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	96				73	87
cM capacity (veh/h)	935				264	668
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	187	289	401	233	155	
Volume Left	42	0	0	0	71	
Volume Right	0	0	0	32	84	
cSH	935	1700	1700	1700	393	
Volume to Capacity	0.04	0.17	0.24	0.14	0.39	
Queue Length 95th (ft)	4	0	0	0	46	
Control Delay (s)	2.4	0.0	0.0	0.0	20.0	
Lane LOS	A				C	
Approach Delay (s)	0.9		0.0		20.0	
Approach LOS					C	
Intersection Summary						
Average Delay			2.8			
Intersection Capacity Utilization			46.3%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
5: Eaton Place & Middle Driveway

2026 Total Future PM
01/11/2024




Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	8	447	549	8	21	22
Future Volume (Veh/h)	8	447	549	8	21	22
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	9	497	610	9	23	24
Pedestrians			1		8	
Lane Width (ft)			12.0		12.0	
Walking Speed (ft/s)			4.0		4.0	
Percent Blockage			0		1	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)		1145	621			
pX, platoon unblocked						
vC, conflicting volume	627				890	318
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	627				890	318
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				92	96
cM capacity (veh/h)	944				278	674
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	175	331	407	212	47	
Volume Left	9	0	0	0	23	
Volume Right	0	0	0	9	24	
cSH	944	1700	1700	1700	397	
Volume to Capacity	0.01	0.19	0.24	0.12	0.12	
Queue Length 95th (ft)	1	0	0	0	10	
Control Delay (s)	0.5	0.0	0.0	0.0	15.3	
Lane LOS	A				C	
Approach Delay (s)	0.2		0.0		15.3	
Approach LOS					C	
Intersection Summary						
Average Delay			0.7			
Intersection Capacity Utilization			28.0%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
6: Eaton Place & East Driveway

2026 Total Future PM
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↕↕	↕↔		↔↔	
Traffic Volume (veh/h)	11	457	441	23	92	114
Future Volume (Veh/h)	11	457	441	23	92	114
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	12	508	490	26	102	127
Pedestrians		1			3	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		None	None			
Median storage (veh)						
Upstream signal (ft)			307			
pX, platoon unblocked						
vC, conflicting volume	519				784	262
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	519				784	262
tC, single (s)	4.1				6.8	6.9
tC, 2 stage (s)						
tF (s)	2.2				3.5	3.3
p0 queue free %	99				69	83
cM capacity (veh/h)	1041				326	734
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	SB 1	
Volume Total	181	339	327	189	229	
Volume Left	12	0	0	0	102	
Volume Right	0	0	0	26	127	
cSH	1041	1700	1700	1700	471	
Volume to Capacity	0.01	0.20	0.19	0.11	0.49	
Queue Length 95th (ft)	1	0	0	0	65	
Control Delay (s)	0.7	0.0	0.0	0.0	19.7	
Lane LOS	A				C	
Approach Delay (s)	0.2		0.0		19.7	
Approach LOS					C	
Intersection Summary						
Average Delay			3.7			
Intersection Capacity Utilization			39.4%		ICU Level of Service	A
Analysis Period (min)			15			



Lane Group	EBT	WBT	NBT	SBT
Lane Group Flow (vph)	566	951	20	73
v/c Ratio	0.26	1.37	0.34	0.74
Control Delay	3.0	238.5	110.4	137.0
Queue Delay	3.7	0.8	0.0	0.0
Total Delay	6.6	239.2	110.4	137.0
Queue Length 50th (ft)	22	-962	26	101
Queue Length 95th (ft)	m23	#1041	61	#173
Internal Link Dist (ft)	47	487	120	220
Turn Bay Length (ft)				
Base Capacity (vph)	2147	693	71	109
Starvation Cap Reductn	1467	0	0	0
Spillback Cap Reductn	0	76	0	0
Storage Cap Reductn	0	0	0	0
Reduced v/c Ratio	0.83	1.54	0.28	0.67

















Intersection Summary

- ~ Volume exceeds capacity, queue is theoretically infinite.
Queue shown is maximum after two cycles.
- # 95th percentile volume exceeds capacity, queue may be longer.
Queue shown is maximum after two cycles.
- m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
7: Willow Crescent Dr & Oak Place/Eaton Place

2026 Total Future PM

01/11/2024

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	93	398	2	2	781	44	4	11	2	35	20	9
Future Volume (vph)	93	398	2	2	781	44	4	11	2	35	20	9
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)		6.8			4.5			4.5			5.0	
Lane Util. Factor		0.95			0.95			1.00			1.00	
Frbp, ped/bikes		1.00			1.00			0.99			1.00	
Flpb, ped/bikes		1.00			1.00			1.00			1.00	
Frt		1.00			0.99			0.99			0.98	
Flt Protected		0.99			1.00			0.99			0.97	
Satd. Flow (prot)		3504			3505			1801			1780	
Flt Permitted		0.99			0.95			0.99			0.97	
Satd. Flow (perm)		3504			3344			1801			1780	
Peak-hour factor, PHF	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
Adj. Flow (vph)	107	457	2	2	898	51	5	13	2	40	23	10
RTOR Reduction (vph)	0	0	0	0	2	0	0	2	0	0	3	0
Lane Group Flow (vph)	0	566	0	0	949	0	0	18	0	0	70	0
Confl. Peds. (#/hr)	3		2	2		3			7	7		
Turn Type	Split	NA		Perm	NA		Split	NA		Split	NA	
Protected Phases	1 2 3	1 2 3			4		7	7		8	8	
Permitted Phases				4								
Actuated Green, G (s)		134.8			45.5			7.1			11.8	
Effective Green, g (s)		127.9			45.5			7.1			11.8	
Actuated g/C Ratio		0.58			0.21			0.03			0.05	
Clearance Time (s)					4.5			4.5			5.0	
Vehicle Extension (s)					5.5			2.0			2.0	
Lane Grp Cap (vph)		2037			691			58			95	
v/s Ratio Prot		c0.16						c0.01			c0.04	
v/s Ratio Perm					c0.28							
v/c Ratio		0.28			1.37			0.31			0.74	
Uniform Delay, d1		23.0			87.2			104.1			102.6	
Progression Factor		0.14			1.08			1.00			1.00	
Incremental Delay, d2		0.0			177.3			1.1			22.5	
Delay (s)		3.2			271.9			105.2			125.0	
Level of Service		A			F			F			F	
Approach Delay (s)		3.2			271.9			105.2			125.0	
Approach LOS		A			F			F			F	
Intersection Summary												
HCM 2000 Control Delay			168.7									F
HCM 2000 Volume to Capacity ratio			0.59									
Actuated Cycle Length (s)			220.0						34.5			
Intersection Capacity Utilization			58.2%									B
Analysis Period (min)			15									
c Critical Lane Group												

Queues

2026 Total Future PM

8: Chain Bridge Road & New Road

01/11/2024



Lane Group	WBL	WBR	NBT	SBL	SBT
Lane Group Flow (vph)	5	98	1619	58	1561
v/c Ratio	0.05	0.56	0.41	0.58	0.50
Control Delay	94.6	26.1	3.5	122.7	4.2
Queue Delay	0.0	0.0	0.3	0.0	0.0
Total Delay	94.6	26.1	3.8	122.7	4.2
Queue Length 50th (ft)	7	0	12	84	173
Queue Length 95th (ft)	24	67	564	142	415
Internal Link Dist (ft)	173		608		231
Turn Bay Length (ft)				200	
Base Capacity (vph)	217	280	3980	136	3100
Starvation Cap Reductn	0	0	1477	0	0
Spillback Cap Reductn	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0
Reduced v/c Ratio	0.02	0.35	0.65	0.43	0.50

Intersection Summary

HCM Signalized Intersection Capacity Analysis
8: Chain Bridge Road & New Road

2026 Total Future PM
01/11/2024



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	↘	↗	↑↑↑		↘	↑↑
Traffic Volume (vph)	5	90	1488	2	53	1436
Future Volume (vph)	5	90	1488	2	53	1436
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900
Total Lost time (s)	8.0	8.0	8.0		8.0	8.0
Lane Util. Factor	1.00	1.00	0.91		1.00	0.95
Frt	1.00	0.85	1.00		1.00	1.00
Flt Protected	0.95	1.00	1.00		0.95	1.00
Satd. Flow (prot)	1770	1583	5084		1770	3539
Flt Permitted	0.95	1.00	1.00		0.95	1.00
Satd. Flow (perm)	1770	1583	5084		1770	3539
Peak-hour factor, PHF	0.92	0.92	0.92	0.92	0.92	0.92
Adj. Flow (vph)	5	98	1617	2	58	1561
RTOR Reduction (vph)	0	93	0	0	0	0
Lane Group Flow (vph)	5	5	1619	0	58	1561
Turn Type	Prot	Perm	NA		Prot	NA
Protected Phases	8		2		1	6
Permitted Phases		8				
Actuated Green, G (s)	11.3	11.3	172.2		12.5	192.7
Effective Green, g (s)	11.3	11.3	172.2		12.5	192.7
Actuated g/C Ratio	0.05	0.05	0.78		0.06	0.88
Clearance Time (s)	8.0	8.0	8.0		8.0	8.0
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0
Lane Grp Cap (vph)	90	81	3979		100	3099
v/s Ratio Prot	0.00		0.32		0.03	c0.44
v/s Ratio Perm		c0.00				
v/c Ratio	0.06	0.06	0.41		0.58	0.50
Uniform Delay, d1	99.3	99.3	7.6		101.2	3.0
Progression Factor	1.00	1.00	0.38		1.00	1.00
Incremental Delay, d2	0.3	0.3	0.3		7.9	0.6
Delay (s)	99.5	99.6	3.2		109.1	3.6
Level of Service	F	F	A		F	A
Approach Delay (s)	99.6		3.2			7.4
Approach LOS	F		A			A

Intersection Summary

HCM 2000 Control Delay	8.2	HCM 2000 Level of Service	A
HCM 2000 Volume to Capacity ratio	0.50		
Actuated Cycle Length (s)	220.0	Sum of lost time (s)	24.0
Intersection Capacity Utilization	60.5%	ICU Level of Service	B
Analysis Period (min)	15		

c Critical Lane Group

Queues

1: Chain Bridge Road & Norman Avenue/Oak Place



Lane Group	EBT	WBT	WBR	NBL	NBT	SBL	SBT
Lane Group Flow (vph)	109	430	399	31	1125	331	1172
v/c Ratio	0.77	0.75	0.55	0.34	0.60	0.75	0.72
Control Delay	127.5	7.2	7.3	109.9	58.0	106.5	48.8
Queue Delay	0.0	56.3	58.6	0.0	0.0	0.0	0.8
Total Delay	127.5	63.5	65.9	109.9	58.0	106.5	49.7
Queue Length 50th (ft)	156	130	130	44	497	253	746
Queue Length 95th (ft)	#288	m0	m0	87	549	319	583
Internal Link Dist (ft)	420	47			982		608
Turn Bay Length (ft)				190		400	
Base Capacity (vph)	141	583	726	202	1863	471	1617
Starvation Cap Reductn	0	254	416	0	0	0	188
Spillback Cap Reductn	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0
Reduced v/c Ratio	0.77	1.31	1.29	0.15	0.60	0.70	0.82

Intersection Summary

95th percentile volume exceeds capacity, queue may be longer.





















Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

HCM Signalized Intersection Capacity Analysis
 1: Chain Bridge Road & Norman Avenue/Oak Place

2026 Total Future PM (IMPR)





















01/11/2024

													
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations													
Traffic Volume (vph)	31	59	15	233	65	497	30	961	119	318	1066	56	
Future Volume (vph)	31	59	15	233	65	497	30	961	119	318	1066	56	
Ideal Flow (vphp)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Total Lost time (s)		4.9			2.5	2.5	4.8	4.8		4.8	4.8		
Lane Util. Factor		1.00			0.95	0.95	1.00	0.91		0.97	0.95		
Frbp, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Flpb, ped/bikes		1.00			1.00	1.00	1.00	1.00		1.00	1.00		
Frt		0.98			0.96	0.85	1.00	0.98		1.00	0.99		
Flt Protected		0.99			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (prot)		1795			1650	1504	1770	5001		3433	3511		
Flt Permitted		0.99			0.97	1.00	0.95	1.00		0.95	1.00		
Satd. Flow (perm)		1795			1650	1504	1770	5001		3433	3511		
Peak-hour factor, PHF	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	0.96	
Adj. Flow (vph)	32	61	16	243	68	518	31	1001	124	331	1110	62	
RTOR Reduction (vph)	0	3	0	0	7	203	0	0	0	0	0	0	
Lane Group Flow (vph)	0	106	0	0	423	196	31	1125	0	331	1172	0	
Confl. Peds. (#/hr)			1	1									
Turn Type	Split	NA		Split	NA	Prot	Prot	NA		Prot	NA		
Protected Phases	3	3		4 7 8	4 7 8	4 7 8	5	2		1	6		
Permitted Phases													
Actuated Green, G (s)		14.9			73.4	73.4	8.2	80.0		26.2	98.0		
Effective Green, g (s)		16.9			75.4	75.4	10.2	82.0		28.2	100.0		
Actuated g/C Ratio		0.08			0.34	0.34	0.05	0.37		0.13	0.45		
Clearance Time (s)		6.9					6.8	6.8		6.8	6.8		
Vehicle Extension (s)		3.5					3.0	3.0		3.0	3.0		
Lane Grp Cap (vph)		137			565	515	82	1864		440	1595		
v/s Ratio Prot		c0.06			c0.26	0.13	0.02	0.22		c0.10	c0.33		
v/s Ratio Perm													
v/c Ratio		0.78			0.75	0.38	0.38	0.60		0.75	0.73		
Uniform Delay, d1		99.7			63.9	54.6	101.8	55.8		92.5	49.1		
Progression Factor		1.00			0.10	0.58	1.00	1.00		1.04	0.94		
Incremental Delay, d2		24.1			0.7	0.1	2.9	1.5		6.3	2.7		
Delay (s)		123.8			7.2	31.6	104.7	57.3		102.8	48.7		
Level of Service		F			A	C	F	E		F	D		
Approach Delay (s)		123.8			19.0			58.6			60.6		
Approach LOS		F			B			E			E		
Intersection Summary													
HCM 2000 Control Delay			52.3									HCM 2000 Level of Service	D
HCM 2000 Volume to Capacity ratio			0.81										
Actuated Cycle Length (s)			220.0									Sum of lost time (s)	30.5
Intersection Capacity Utilization			79.9%									ICU Level of Service	D
Analysis Period (min)			15										
c	Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis
 3: University Blvd/Westmost Driveway & Eaton Place

2026 Total Future PM (IMPR)

01/11/2024


												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	73	387	25	8	596	8	15	1	6	36	0	208
Future Volume (Veh/h)	73	387	25	8	596	8	15	1	6	36	0	208
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.92	0.92	0.90	0.90	0.92	0.92	0.92	0.90	0.92	0.90
Hourly flow rate (vph)	81	430	27	9	662	9	16	1	7	40	0	231
Pedestrians					2			8			5	
Lane Width (ft)					12.0			12.0			12.0	
Walking Speed (ft/s)					4.0			4.0			4.0	
Percent Blockage					0			1			0	
Right turn flare (veh)												
Median type		None			TWLTL							
Median storage (veh)					2							
Upstream signal (ft)		567			1199							
pX, platoon unblocked				0.91			0.91	0.91	0.91	0.91	0.91	
vC, conflicting volume	676			465			1524	1308	454	1291	1316	672
vC1, stage 1 conf vol							614	614		690	690	
vC2, stage 2 conf vol							911	694		602	627	
vCu, unblocked vol	676			357			1527	1287	344	1269	1297	672
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)							6.1	5.5		6.1	5.5	
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	91			99			79	100	99	88	100	49
cM capacity (veh/h)	912			1081			77	296	627	320	322	454
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	NB 2	SB 1					
Volume Total	81	457	9	671	17	7	271					
Volume Left	81	0	9	0	16	0	40					
Volume Right	0	27	0	9	0	7	231					
cSH	912	1700	1081	1700	80	627	428					
Volume to Capacity	0.09	0.27	0.01	0.39	0.21	0.01	0.63					
Queue Length 95th (ft)	7	0	1	0	18	1	106					
Control Delay (s)	9.3	0.0	8.4	0.0	61.5	10.8	26.9					
Lane LOS	A		A		F	B	D					
Approach Delay (s)	1.4		0.1		46.7		26.9					
Approach LOS					E		D					
Intersection Summary												
Average Delay			6.1									
Intersection Capacity Utilization			67.4%	ICU Level of Service	C							
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis

4: Eaton Place & Wwest Driveway

2026 Total Future PM (IMPR)


01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↶	↷	↷		↷	↷
Traffic Volume (veh/h)	38	391	542	29	64	76
Future Volume (Veh/h)	38	391	542	29	64	76
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	42	434	602	32	71	84
Pedestrians		1			6	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			1	
Right turn flare (veh)						
Median type		TWLTL	TWLTL			
Median storage (veh)		2	2			
Upstream signal (ft)		857	909			
pX, platoon unblocked					0.91	
vC, conflicting volume	640				1142	625
vC1, stage 1 conf vol					624	
vC2, stage 2 conf vol					518	
vCu, unblocked vol	640				1108	625
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)					5.4	
tF (s)	2.2				3.5	3.3
p0 queue free %	96				83	83
cM capacity (veh/h)	939				425	482
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	42	434	634	155		
Volume Left	42	0	0	71		
Volume Right	0	0	32	84		
cSH	939	1700	1700	454		
Volume to Capacity	0.04	0.26	0.37	0.34		
Queue Length 95th (ft)	4	0	0	37		
Control Delay (s)	9.0	0.0	0.0	17.0		
Lane LOS	A			C		
Approach Delay (s)	0.8		0.0	17.0		
Approach LOS				C		
Intersection Summary						
Average Delay			2.4			
Intersection Capacity Utilization			46.7%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
5: Eaton Place & Middle Driveway

2026 Total Future PM (IMPR)
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations	↶	↷	↶		↷	↷
Traffic Volume (veh/h)	8	447	549	8	21	22
Future Volume (Veh/h)	8	447	549	8	21	22
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	9	497	610	9	23	24
Pedestrians			1		8	
Lane Width (ft)			12.0		12.0	
Walking Speed (ft/s)			4.0		4.0	
Percent Blockage			0		1	
Right turn flare (veh)						
Median type		TWLTL	TWLTL			
Median storage (veh)		2	2			
Upstream signal (ft)		1145	621			
pX, platoon unblocked					0.92	
vC, conflicting volume	627				1138	622
vC1, stage 1 conf vol					622	
vC2, stage 2 conf vol					516	
vCu, unblocked vol	627				1106	622
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)					5.4	
tF (s)	2.2				3.5	3.3
p0 queue free %	99				95	95
cM capacity (veh/h)	948				433	483
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	9	497	619	47		
Volume Left	9	0	0	23		
Volume Right	0	0	9	24		
cSH	948	1700	1700	457		
Volume to Capacity	0.01	0.29	0.36	0.10		
Queue Length 95th (ft)	1	0	0	9		
Control Delay (s)	8.8	0.0	0.0	13.8		
Lane LOS	A			B		
Approach Delay (s)	0.2		0.0	13.8		
Approach LOS				B		
Intersection Summary						
Average Delay			0.6			
Intersection Capacity Utilization			39.4%		ICU Level of Service	A
Analysis Period (min)			15			

HCM Unsignalized Intersection Capacity Analysis
6: Eaton Place & East Driveway

2026 Total Future PM (IMPR)
01/11/2024



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations						
Traffic Volume (veh/h)	11	457	441	23	92	114
Future Volume (Veh/h)	11	457	441	23	92	114
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	12	508	490	26	102	127
Pedestrians		1			3	
Lane Width (ft)		12.0			12.0	
Walking Speed (ft/s)		4.0			4.0	
Percent Blockage		0			0	
Right turn flare (veh)						
Median type		TWLT	None			
Median storage (veh)		2				
Upstream signal (ft)			307			
pX, platoon unblocked						
vC, conflicting volume	519				1038	507
vC1, stage 1 conf vol					506	
vC2, stage 2 conf vol					532	
vCu, unblocked vol	519				1038	507
tC, single (s)	4.1				6.4	6.2
tC, 2 stage (s)					5.4	
tF (s)	2.2				3.5	3.3
p0 queue free %	99				78	77
cM capacity (veh/h)	1044				468	564
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	12	508	516	229		
Volume Left	12	0	0	102		
Volume Right	0	0	26	127		
cSH	1044	1700	1700	517		
Volume to Capacity	0.01	0.30	0.30	0.44		
Queue Length 95th (ft)	1	0	0	56		
Control Delay (s)	8.5	0.0	0.0	17.4		
Lane LOS	A			C		
Approach Delay (s)	0.2		0.0	17.4		
Approach LOS				C		
Intersection Summary						
Average Delay			3.2			
Intersection Capacity Utilization			43.5%		ICU Level of Service	A
Analysis Period (min)			15			