

NORTHFAX INTERSECTION & DRAINAGE IMPROVEMENTS



Public Information Meeting
September 14, 2016

SCOPE OF WORK



- Widen Chain Bridge Road to six lanes between Fairfax Boulevard to Eaton Place
- Lengthen turn lanes to provide additional stacking for turning vehicles
- Install new sidewalk along Chain Bridge Road and Fairfax Boulevard
- Replace existing span-wire signals with mast arm signals
- Install box culvert from Chain Bridge Road to Eaton Place



BENEFITS OF PROJECT



- Increase capacity for vehicular and pedestrian mobility
- Reduce congestion by improving signal phasing & operation
- Improve traffic flow, lane alignments, and pedestrian mobility and safety
- Eliminate flooding in the intersection



STAKEHOLDER NOTIFICATION



- Maintain access to businesses throughout construction, closing only one entrance at a time
- Provide advance notice and schedule for temporary entrance closings
- Install identification signs at business entrances
- Advanced notification for disturbances and parking restrictions
- The project website will be updated every Friday by noon www.northfax.com
- EMAS (Fairfax City Alerts) notifications will be sent out to stakeholders who register
- ROW and easements need to be cleared for contractor

ACCESS MANAGEMENT



- Access to businesses will be maintained at all times
- Work will be executed in a timely manner to reduce entrance closures
- Contractor will only close one property entrance at a time
- Some work will be performed at night to reduce impacts



PHASE 1 & 2



Preliminary Schedule:

September 2016 to September 2017

- Install detour for northbound Chain Bridge Road
- Construct box culvert across Chain Bridge Road
- Construct Roadway Typical
- Install 1150 LF of drainage pipes on Chain Bridge Road, 1800 LF of sanitary sewer and 2360 LF of water main along Fairfax Boulevard
- Begin Constructing Traffic Signals




PHASE 3



Preliminary Schedule:

June 2017 to November 2017

- Improve alignment on eastbound Fairfax Boulevard and Chain Bridge Road
- Construct medians on Chain Bridge Road
- Install 9 concrete entrances, 750 LF of sidewalk and update ADA ramps
- Lengthen right turn lane on eastbound Fairfax Boulevard

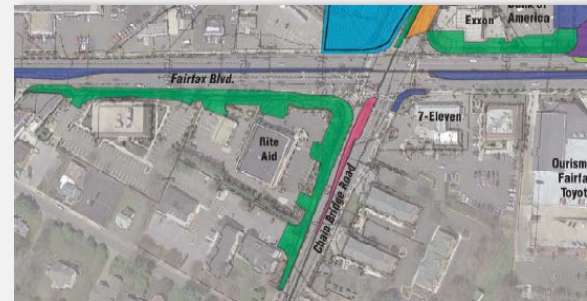

PHASE 4



Preliminary Schedule:

September 2017 to April 2018

- Remove detour for northbound Chain Bridge Road
- Install lane shift on Fairfax Boulevard from Eaton Place to University Drive
- Construct box culvert along Fairfax Boulevard
- Install 700 LF of drainage pipes and 650 LF of sidewalk



PHASE 5 & 6



Preliminary Schedule:

April 2018 to September 2018

- Install lane shift along Fairfax Boulevard from University Drive to Chain Bridge Road
- Construct box culvert along Fairfax Boulevard
- Install 650 LF of drainage pipes and 450 LF of sidewalk



PHASE 7



Preliminary Schedule:

April 2018 to September 2018

- Complete construction of box culvert
- Construct medians along Fairfax Boulevard
- Complete installation of 4 traffic signals





PUBLIC OUTREACH

- Visit the Project Website at www.northfax.com and City of Fairfax Website at www.fairfaxva.gov under Public Works current projects
- Sign up for Fairfax City Alerts at www.fairfaxva.gov/fairfaxcityalert
- E-blasts/List, Notifications, Letters & Flyers
- Staff on-site full time to address any concerns or questions



PROJECT CONTACTS



- Michael Wharton – Construction Manager
Michael.Wharton@volkert.com
540-526-7634
- Ben Lineberry, Jr. – Project Manager
Ben.Lineberry@volkert.com
540-414-5440
- Christina Alexander – Project Manager/Environmental Engineer, City of Fairfax
Christina.Alexander@fairfaxva.gov
703-273-3067
- David Summers – Director of Public Works, City of Fairfax
David.Summers@fairfaxva.gov
703-385-7810